

MOK WALL SINGLE


MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spot-lights and bollards. MOK Wall Single is a Ø6.7" wall mount version with one down beam suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures, 3 optics options, and 4 standard finishes.



TECHNICAL DATA

Wattage	20W
Power Supply	Integral 120VAC - On/Off
Construction	Body/Fixing Bracket: Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B2-U1-G0 (12°, 38° - 3000K) B2-U0-G0 (24° - 3000K)
CRI	>80
Delivered Lumens	2034 lm (3000K, 12°)
Efficacy	101.7 lm/W (3000K, 12°)
Optics	12°, 24°, 38°
Finishes	Anthracite, Pure White (RAL 9010) ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	55,000 hrs (Ta 35°C)
Fixture Dimensions	Ø6.69" x 8.31" w x 7.17" h
IP Rating	IP65, IP68 (Fast connection)
Impact Resistance	IK08

Fixture Dimensions

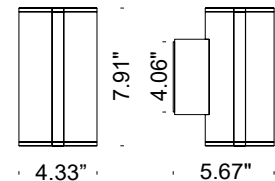

ORDERING INFORMATION

Example: F32024.1.2.11.US.

F32024				US
Model No.	Finish	CCT	Optics	
F32024 (Single)	1 - Anthracite 2 - Pure White (RAL 9010) 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	11 - 12° Spot 12 - 24° Medium 13 - 38° Medium	US


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All Photometry is 3000K

Maximum Candela = 14342.3

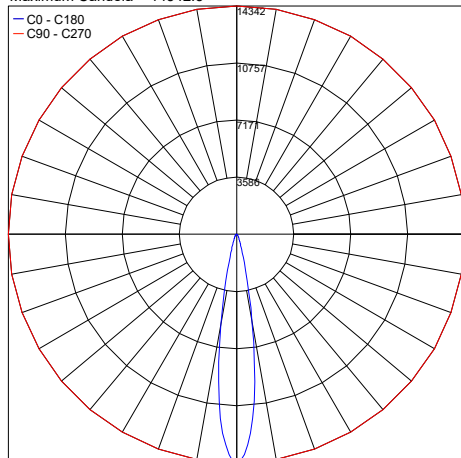


PHOTOMETRIC FILENAME : MOK WALL SINGLE 30K 12° - 32024.X.3.11.IES

Maximum Candela = 7998.3

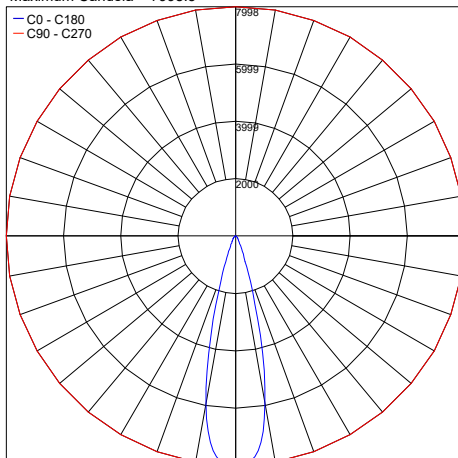

PHOTOMETRIC FILENAME : MOK WALL SINGLE 30K 24° - 32024.X.3.12.IES

Maximum Candela = 4147.6

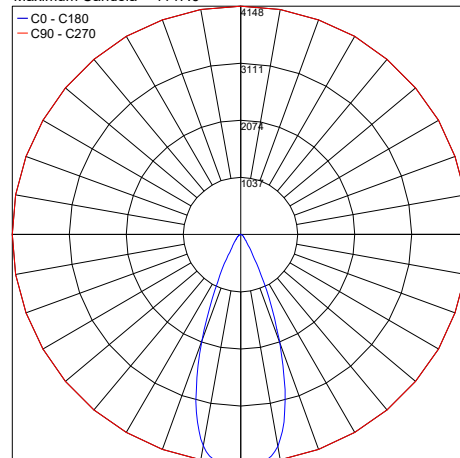

PHOTOMETRIC FILENAME : MOK WALL SINGLE 30K 38° - 32024.X.3.13.IES

Job Name/Date:

Fixture Type Designation: