


# KA4 WOOD

KA4 Wood is an LED bollard with a Ø3.3" round head and real teak or simulated wood set in the aluminum body. It is suitable for outdoor installation and is offered in 2 heights – 2-foot or 3-foot – with 5 color temperatures, 3 optics options, and 5 standard finishes. Dark Sky compliant.



MADE IN THE U.S.A.

Fixture Dimensions

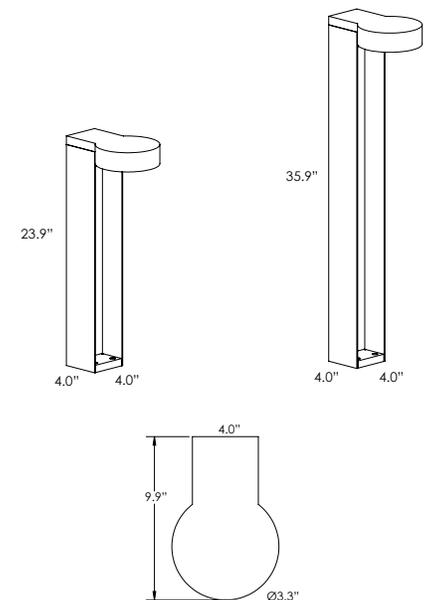

## TECHNICAL DATA

<b>Wattage</b>	30W
<b>Power Supply</b>	Integral 120-277VAC
<b>Dimming</b>	0-10V Dimming
<b>Construction</b>	Body: Aluminum Lens: Clear
<b>CCT</b>	2200K, 2700K, 3000K, 4000K RGBW (with Integral DMX decoder)
<b>BUG Rating</b>	B2-U0-G0 (24°, 36° - 3000K) B1-U0-G0 (Asym - 3000K)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1953 lm (24°, 3000K) 1846 lm (36°, 3000K) 2139 lm (Asym, 3000K) Dark Sky compliant
<b>Efficacy</b>	72.3 lm/W (24°, 3000K) 68.4 lm/W (36°, 3000K) 79.2 lm/W (Asym, 3000K)
<b>Optics</b>	24°, 36°, Asymmetric
<b>Finishes</b>	4 Wood Types - see below or page 2 5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	Pole: 4.0" w x 4.0" d x 24.0" or 36.0" h Head: Ø3.3" x 9.9"
<b>IP Rating</b>	IP65

## ORDERING INFORMATION


Example: KA4-W-2-30-01-AW-11-C-0. Accessories ordered separately.

KA4-W	-		-		-		-	C	-	0
Model #	Height	CCT	Optics	Wood Finish	Finish	Dimming	Options			
KA4-W	2 - 2 ft.	22 - 2200K	01 - 24°	RW - Sim. Rose Wood	11 - White Suede	C - Integral 120-277VAC 0-10V Dimming (for static white only)	0 - None			
	3 - 3 ft.	27 - 2700K	02 - 36°	AW - Sim. Amber Wood	02 - Black Suede					
		30 - 3000K	03 - Asym.	BW - Sim. Black Walnut	03 - Gray					
		40 - 4000K		TK - Real Teak Wood	18 - Tex. Bronze					
		RG - RGBW			TS - Silver					
					C - Custom					

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation

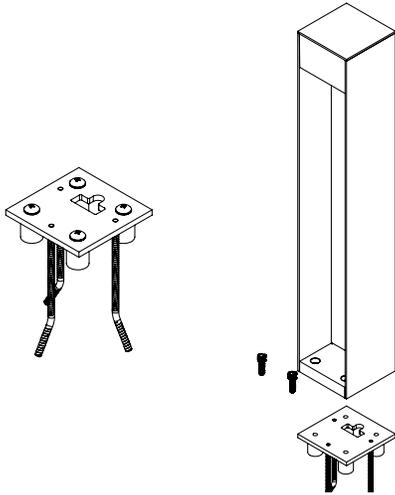

**AM-00017**  
Mounting Base  
Assembly

## WOOD FINISHES



Black Walnut



Rose Wood




Amber Wood

Real Teak Wood - Shown in Main Image on Page 1

## PHOTOMETRICS


Note: all photometry is 3000K

Maximum Candela = 6135

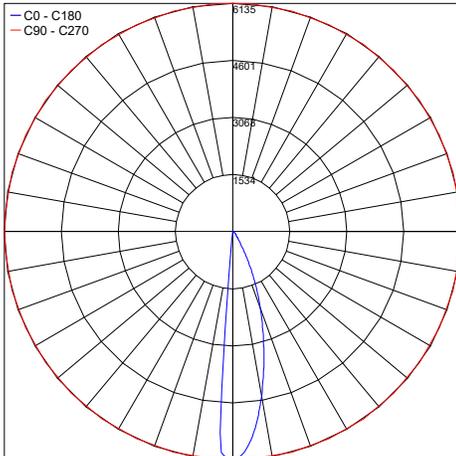


PHOTOMETRIC FILENAME : KA4-KL4\_3FT 30K 24° BLK\_LLI A002721-001.IES

Maximum Candela = 4414

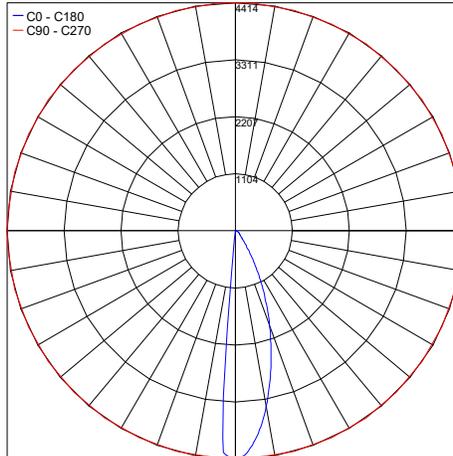

PHOTOMETRIC FILENAME : KA4-KL4\_3FT 30K 36° BLK\_LLI A002721-002.IES

Maximum Candela = 1874

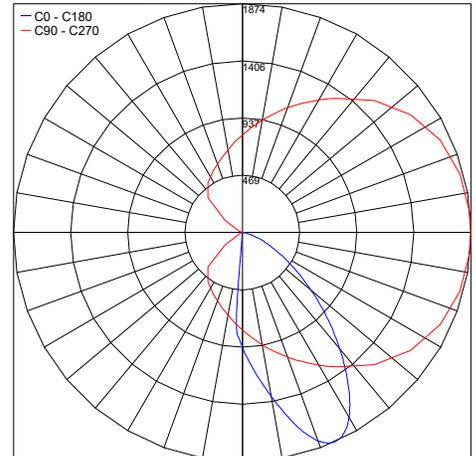

PHOTOMETRIC FILENAME : KA4-KL4\_3FT 30K ASYM BLK\_LLI A002721-003.IES

Job Name/Date:

Fixture Type Designation: