


Klee Wood is an outdoor LED bollard with real teak or simulated wood set in the body of the Klee bollard. It is offered in 2 heights - 2-foot or 3-foot - with 3 color temperatures and 3 optics options, 1 wood and 3 simulated wood options with 5 standard finishes. Dark Sky compliant.



MADE IN THE U.S.A. - Teak Wood Shown

Fixture Dimensions

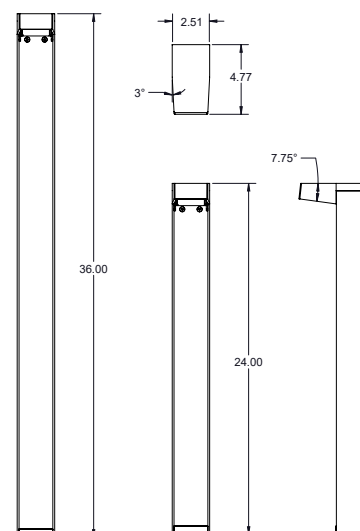

## TECHNICAL DATA

|                           |                                                                                                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wattage</b>            | 14W                                                                                                                                                      |
| <b>Power Supply</b>       | Integral 120VAC<br>Remote 120-277VAC (Consult Factory)                                                                                                   |
| <b>Dimming</b>            | 0-10V Dimming                                                                                                                                            |
| <b>Construction</b>       | Body: Aluminum<br>Lens: Clear                                                                                                                            |
| <b>CCT</b>                | 2700K, 3000K, 4000K                                                                                                                                      |
| <b>BUG Rating</b>         | B0-U0-G1 (Type IV Short)<br>B0-U0-G0 (Type III Very Short)                                                                                               |
| <b>CRI</b>                | >80                                                                                                                                                      |
| <b>Delivered Lumens</b>   | 1189 lm (Optic 1 - Type IV Short)<br>1025 lm (Optic 2 - Type III Very Short)<br>1208 lm (Optic 3 - Type III Very Short Asymmetric)<br>Dark Sky compliant |
| <b>Efficacy</b>           | 84.9 lm/W (Optic 1 - Type IV Short)<br>73.2 lm/W (Optic 2 - Type III Very Short)<br>86.3 lm/W (Optic 3 - Type III Very Short Asymmetric)                 |
| <b>Optics</b>             | 3 Options - See Below                                                                                                                                    |
| <b>Finishes</b>           | 4 Wood Types - see below or page 2<br>5 Standard, Custom RAL on request                                                                                  |
| <b>Fixture Dimensions</b> | Head: 2.51" w x 4.77" l x 24.0" or 36.0" h                                                                                                               |
| <b>IP Rating</b>          | IP65                                                                                                                                                     |

## ORDERING INFORMATION


Example: KLE-L-2-40-02-TK-03-C-0. Accessories ordered separately.

| KLE-L   | -                      |                                        | -                                                                                                                                     |                                                                                           | -                                                                                                  |                                      | -        | C | - | 0 |
|---------|------------------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------|----------|---|---|---|
| Model # | Height                 | CCT                                    | Optics                                                                                                                                | Wood Finish                                                                               | Finish                                                                                             | Dimming                              | Options  |   |   |   |
| KLE-L   | 2 - 2 ft.<br>3 - 3 ft. | 27 - 2700K<br>30 - 3000K<br>40 - 4000K | 01 - Type IV Short<br>(PPDP00357)<br>02 - Type III Very Short<br>(PPDP00358)<br>03 - Type III Very Short<br>Asymmetric<br>(PPDP00356) | RW - Rose<br>Wood<br>AW - Amber<br>Wood<br>BW - Black<br>Walnut<br>TK - Real Teak<br>Wood | 11 - White Suede<br>02 - Black Suede<br>03 - Gray<br>18 - Tex. Bronze<br>TS - Silver<br>C - Custom | C - Integral 120VAC<br>0-10V Dimming | 0 - None |   |   |   |




Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



**AM-00010**  
Mounting Base  
Assembly

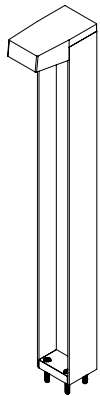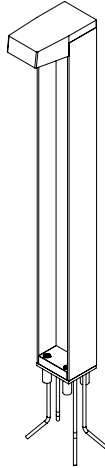

## WOOD FINISHES



Black Walnut



Rose Wood



Amber Wood


Real Teak Wood - Shown in Main Image on Page 1

## PHOTOMETRIC DATA

Note: all photometry is 3000K

### OPTIC 1 - Type IV Short (PPDP00357)


Maximum Candela = 693.8

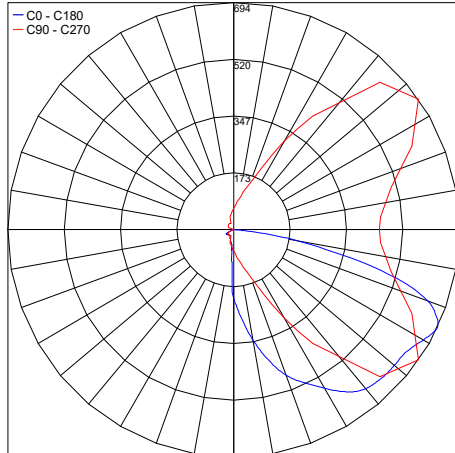

PHOTOMETRIC FILENAME : KLEE 2FT 30K BLK OPTIC 1 - LLIA002333-001.IES

### OPTIC 2 - Type III Very Short (PPDP00358)


Maximum Candela = 442.5

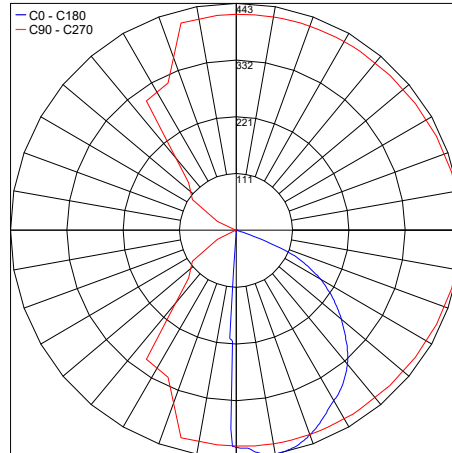

PHOTOMETRIC FILENAME : KLEE 2FT 30K BLK OPTIC 2 - LLIA002333-002.IES

### OPTIC 3 - Type III Very Short Asym. (PPDP00356)

Maximum Candela = 767.7

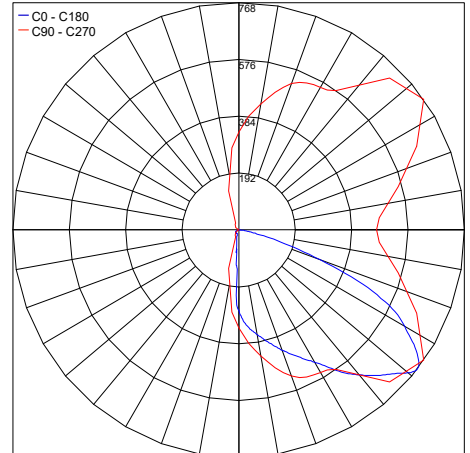

PHOTOMETRIC FILENAME : KLEE 2FT 30K BLK OPTIC 3 - LLIA002333-003.IES

Job Name/Date:

Fixture Type Designation: