



Muse

**A NEW RHYTHM OVER ALL THINGS,
SETTING THE WORLD TO SPIN IN A GRACEFUL DANCE**

A new concept of outdoor lamp, a modular system that offers the possibility of modeling and changing even over time, based on the needs of the user.

Composed of 3 main emission sources: CAPSULE, in anodized aluminum, is proposed as an elegant light source with a modern design which evolves into STILLA, more decorative and easy, and finally SPOT, a projector for more technical installations.

The combination of these three light sources with the various installation accessories offers multiple lighting solutions.


designplan® 







Muse Stilla Wall



Available finishes:



black

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥90
IP rating 65
Application wall
Diffuser sandblasted glass


Power 24V 1.5W led
Led Color temp. 2700/3000K




		lm	black
2700K	24V	245	902032637
1.5W led			
			black
3000K	24V	255	902012637
1.5W led			



Muse Stilla Decò Copper

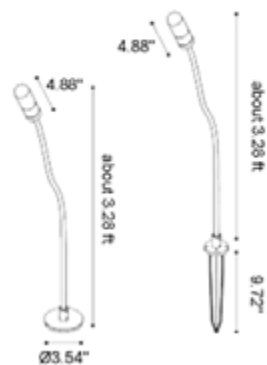

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Application
Diffuser

mid power led
24V
PWM
≥90
65
floor, ground
sandblasted glass

Power
Led Color temp.

24V 1.5W led
2700/3000K



			lm	black	bronze
2700K 1.5W led	24V	with base	245	902032657	902032659
		with spike	245	902031657	902031659
			lm	black	bronze
3000K 1.5W led	24V	with base	255	902012657	902012659
		with spike	255	902011657	902011659



Muse Stilla Decò Bend-Shape

h 19.7" / h 31.5"

Available finishes:



black

Light Source
Supply
Dimmer
CRI
IP rating
Application
Diffuser


mid power led
24V
only 24V (PWM)
≥90
65
floor, ground
sandblasted glass

Power

24V 1.5W led

Led Color temp.

2700/3000K

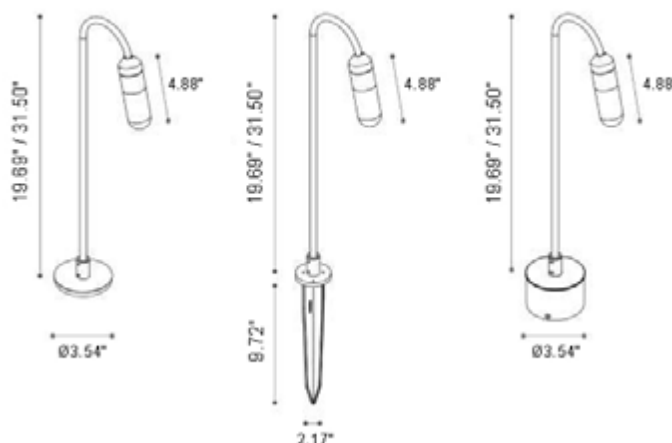

h 19.7"

				lm	black
2700K	24V	III	with base	245	902032667
1.5W led			with spike	245	902032677
1.5W total					

				lm	black
3000K	24V	III	with base	255	902012667
1.5W led			with spike	255	902012677
1.5W total					

h 31.5"

				lm	black
2700K	24V	III	with base	245	902032687
1.5W led			with spike	245	902032697
1.5W total					

				lm	black
3000K	24V	III	with base	255	902012687
1.5W led			with spike	255	902012697
1.5W total					



Muse Stilla Decò Stem

h 19.7" / h 31.5"

Available finishes:



black

Light Source
Supply
Dimmer
CRI
IP rating
Application
Diffuser


mid power led
24V
only 24V (PWM)
≥90
65
floor, ground, roof
sandblasted glass

Power

24V 1.5W led

Led Color temp.

2700/3000K

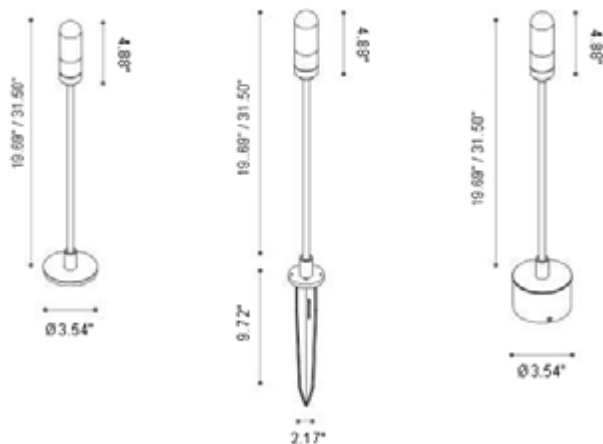

h 19.7"

			lm	black
2700K	24V	with base	245	902032707
1.5W led		with spike	245	902032717
1.5W total				


			lm	black
3000K	24V	with base	255	902012707
1.5W led		with spike	255	902012717
1.5W total				

h 31.5"

			lm	black
2700K	24V	with base	245	902032727
1.5W led		with spike	245	902032737
1.5W total				


			lm	black
3000K	24V	with base	255	902012727
1.5W led		with spike	255	902012737
1.5W total				



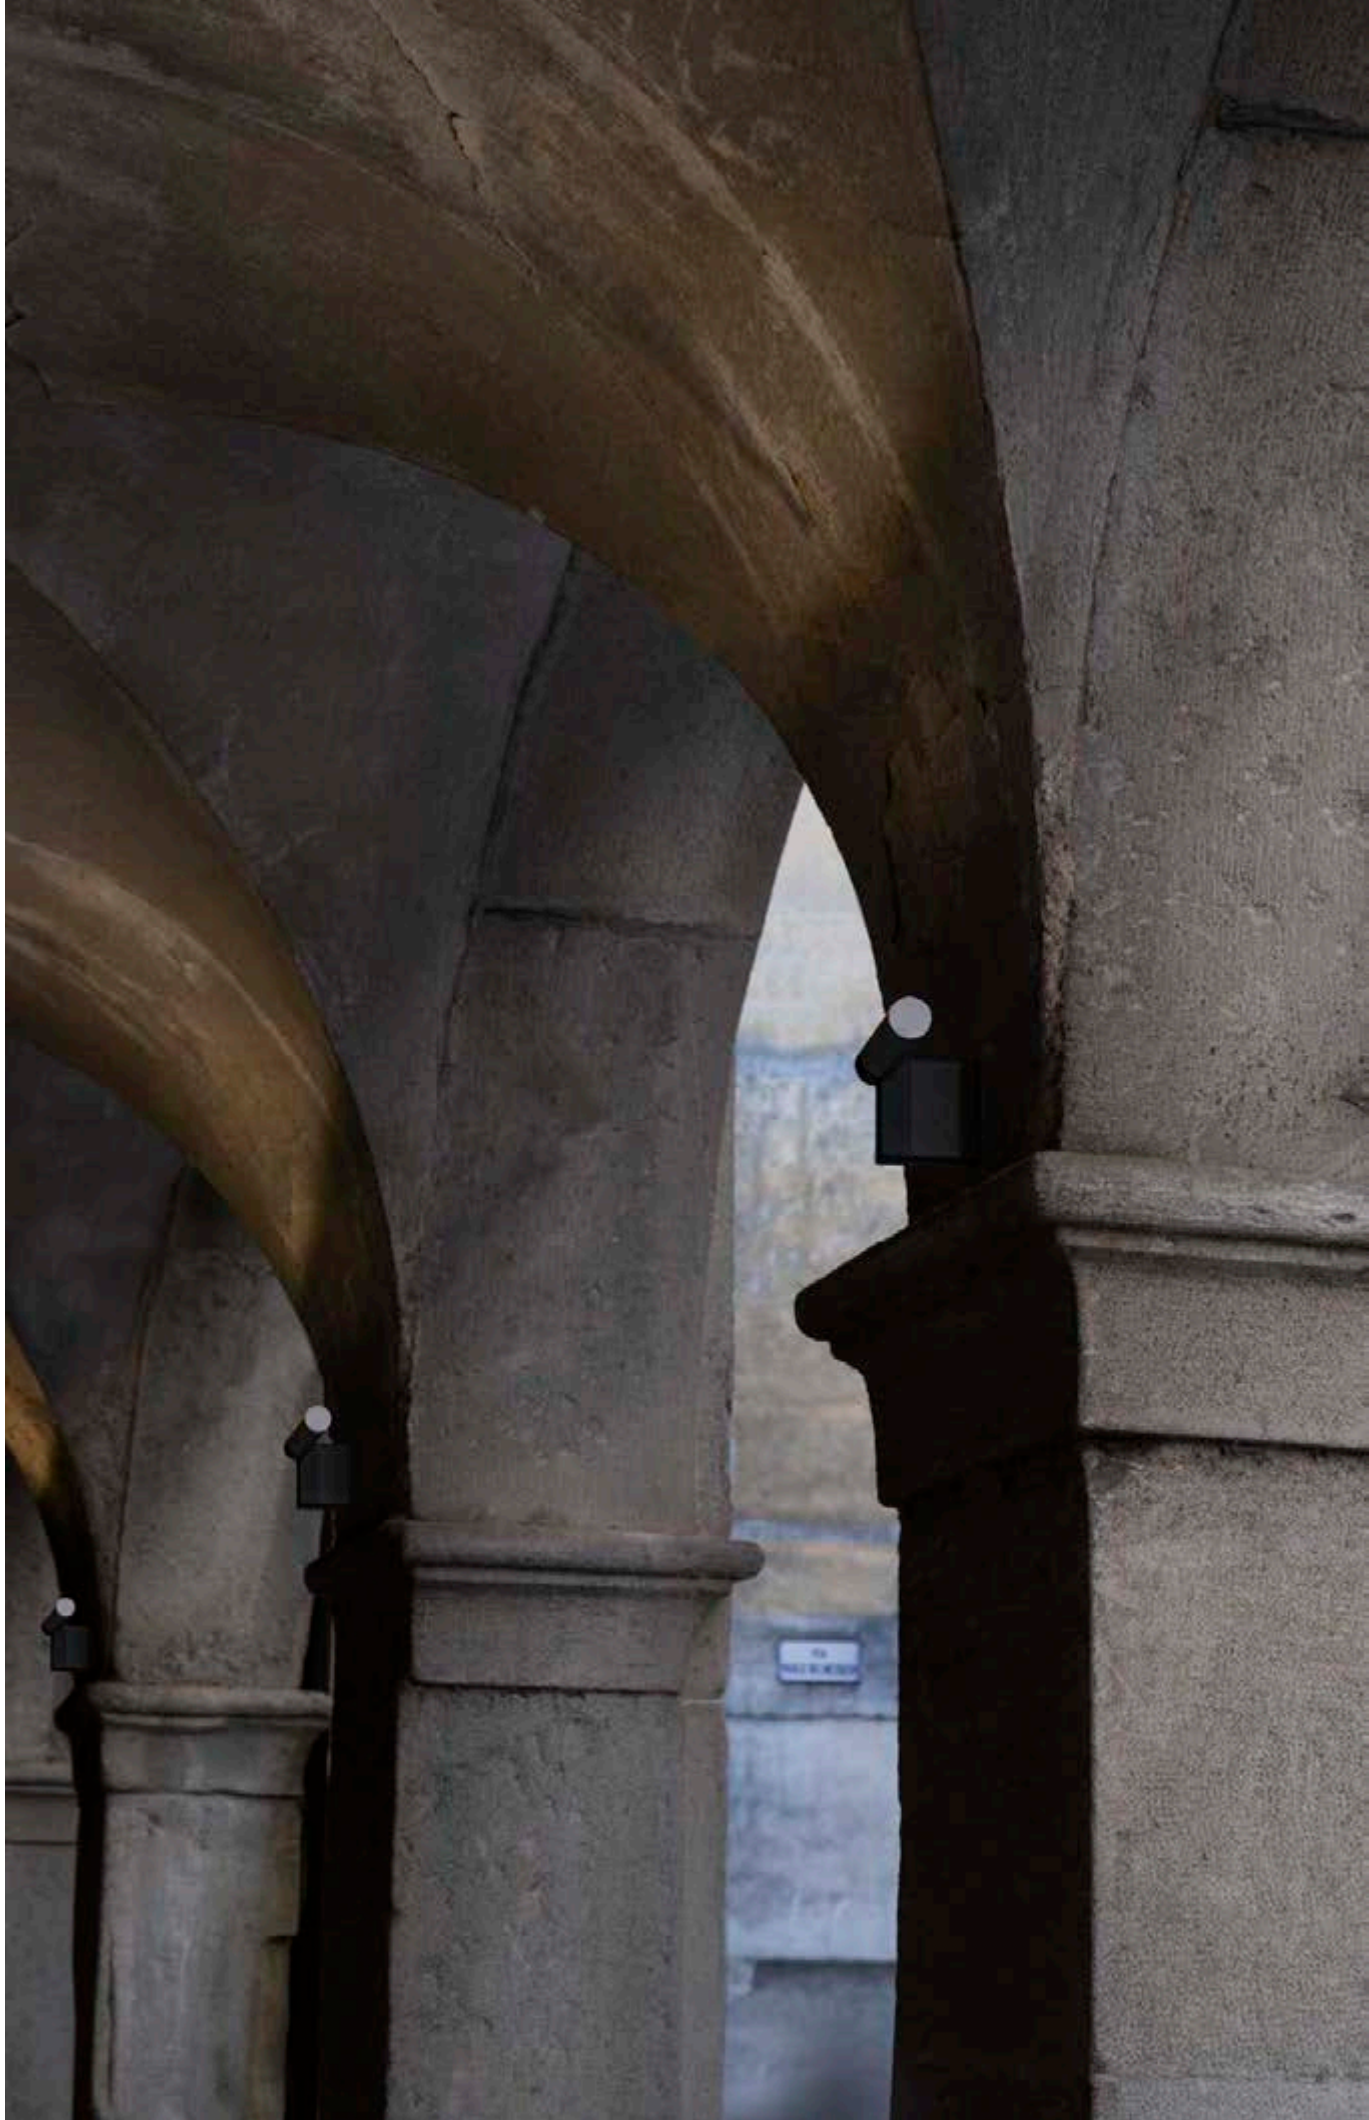


Muse Capsule Wall

mono/double emission



Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating 65
Application wall
Diffuser polyurethane opal resin

Power 24V 4W led / 2x4W led
Led Color temp. 2700/2800K - 3000/3100K

SUPPORT ONLY:




		lm	black	aluminum	bronze
2700/2800K	24V				
4W led-4W total		mono emission 570	902032747	902032746	902032749
2x4W led-2x4W total		double emission 2x570	902032757	902032756	902032759

		lm	black	aluminum	bronze
3000/3100K	24V				
4W led-4W total		mono emission 600	902012747	902012746	902012749
2x4W led-2x4W total		double emission 2x600	902012757	902012756	902012759


The light color of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

Muse Capsule Bollard

h 11.8" / h 19.7" / h 31.5"

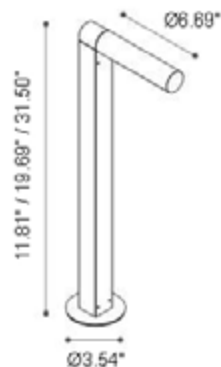

Available finishes:



Light Source
Supply
Dimmer
CRI

mid power led
24V / 220-240V
PWM
≥80

Power
Led Color temp.

24V 4W led
2700/2800K - 3000/3100K

IP rating
Application
Diffuser

65
ground
polyurethane opal resin

SUPPORT ONLY:



h 11.8"

	lm	black	aluminum	bronze
2700/2800K 4W led-4W total 24V	570	902032767	902032766	902032769
3000/3100K 4W led-4W total 24V	600	902012767	902012766	902012769

h 19.7"

	lm	black	aluminum	bronze
2700/2800K 4W led-4W total 24V	570	902032777	902032776	902032779
3000/3100K 4W led-4W total 24V	600	902012777	902012776	902012779


h 31.5"

	lm	black	aluminum	bronze
2700/2800K 4W led-4W total 24V	570	902032787	902032786	902032789
3000/3100K 4W led-4W total 24V	600	902012787	902012786	902012789




Muse Spot 01

small box




Available finishes:



Light Source cob led
Supply xx
CRI ≥80
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass

Power 12W led/15W total
Led Color temp. 2700/3000K




			lm		white	sand	aluminum	black
2700K	xxx	▲ 15°		with honeycomb	902031792	902031793	902031795	9020317911
12W led		▲ 15°	1237	without honeycomb	902031802	902031803	902031805	9020318011
15W total		▲ 26°		with honeycomb	902031812	902031813	902031815	9020318111
		▲ 26°	1182	without honeycomb	902031822	902031823	902031825	9020318211
		▲ 36°		with honeycomb	902031832	902031833	902031835	9020318311
		▲ 36°	1182	without honeycomb	902031842	902031843	902031845	9020318411
		▲ 60°	1098	without honeycomb	902031852	902031853	902031855	9020318511

			lm		white	sand	aluminum	black
3000K	xxx	▲ 15°		with honeycomb	902011792	902011793	902011795	9020137911
12W led		▲ 15°	1288	without honeycomb	902011802	902011803	902011805	9020118011
15W total		▲ 26°		with honeycomb	902011812	902011813	902011815	9020118111
		▲ 26°	1230	without honeycomb	902011822	902011823	902011825	9020118211
		▲ 36°		with honeycomb	902011832	902011833	902011835	9020118311
		▲ 36°	1230	without honeycomb	902011842	902011843	902011845	9020118411
		▲ 60°	1144	without honeycomb	902011852	902011853	902011855	9020118511




Muse Spot 01

big box



Available finishes:



Light Source	cob led
Supply	xxV
Dimmer	yes
CRI	≥80
IP rating	65
Application	wall, ground, roof
Diffuser	transparent tempered glass

Power	12W led/15W ù2ù1f
Led Color temp.	2700/3000K




		lm			white	sand	aluminum	black
2700K	xxV	▲ 15°	1237	with honeycomb	902036792	902036793	902036795	9020367911
12W led		▲ 15°		without honeycomb	902036802	902036803	902036805	9020368011
15W ù2ù1f		▲ 26°	1182	with honeycomb	902036812	902036813	902036815	9020368111
Dali		▲ 26°		without honeycomb	902036822	902036823	902036825	902036811
		▲ 36°	1182	with honeycomb	902036832	902036833	902036835	9020368311
		▲ 36°		without honeycomb	902036842	902036843	902036845	9020368411
		▲ 60°	1098	without honeycomb	902036852	902036853	902036855	9020368511

		lm			white	sand	aluminum	black
3000K	xxV	▲ 15°	1288	with honeycomb	902016792	902016793	902016795	9020167911
12W led		▲ 15°		without honeycomb	902016802	902016803	902016805	9020168011
15W ù2ù1f		▲ 26°	1230	with honeycomb	902016812	902016813	902016815	9020168111
Dali		▲ 26°		without honeycomb	902016822	902016823	902016825	902016811
		▲ 36°	1230	with honeycomb	902016832	902016833	902016835	9020168311
		▲ 36°		without honeycomb	902016842	902016843	902016845	9020168411
		▲ 60°	1144	without honeycomb	902016852	902016853	902016855	9020168511




Muse Spot 01 Bollard

h 11.8"




Available finishes:



Light Source
cob led
Supply
xxV
CRI
≥80
IP rating
65
Application
ground
Diffuser
transparent tempered glass

Power
12W led/15W total
Led Color temp.
2700/3000K

SUPPORT ONLY:




			lm		white	sand	aluminum	black
2700K	xxV	▲ 15°		with honeycomb	902031862	902031863	902031865	9020318611
12W led		▲ 15°	1237	without honeycomb	902031872	902031873	902031875	9020318711
15W total		▲ 26°		with honeycomb	902031882	902031883	902031885	9020318811
		▲ 26°	1182	without honeycomb	902031892	902031893	902031895	9020318911
		▲ 36°		with honeycomb	902031902	902031903	902031905	9020319011
		▲ 36°	1182	without honeycomb	902031912	902031913	902031915	9020319111
		▲ 60°	1098	without honeycomb	902031922	902031923	902031925	9020319211

			lm		white	sand	aluminum	black
3000K	xxV	▲ 15°		with honeycomb	902011862	902011863	902011865	9020118611
12W led		▲ 15°	1288	without honeycomb	902011872	902011873	902011875	9020118711
15W total		▲ 26°		with honeycomb	902011882	902011883	902011885	9020118811
		▲ 26°	1230	without honeycomb	902011892	902011893	902011895	9020118911
		▲ 36°		with honeycomb	902011902	902011903	902011905	9020119011
		▲ 36°	1230	without honeycomb	902011912	902011913	902011915	9020119111
		▲ 60°	1144	without honeycomb	902011922	902011923	902011925	9020119211

Muse Spot 01 Bollard

h 19.7"

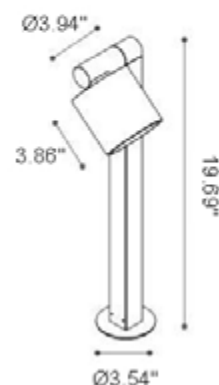

Available finishes:



Light Source
Supply
CRI

cob led
xxV
≥80

IP rating
Application
Diffuser

65
ground
transparent tempered glass

Power
Led Color temp.

12W led/15W total
2700/3000K

SUPPORT ONLY:




				lm		white	sand	aluminum	black
2700K	xxV	🔆 15°			with honeycomb	902031932	902031933	902031935	9020319311
12W led		🔆 15°	1237		without honeycomb	902031942	902031943	902031945	9020319411
15W total		🔆 26°			with honeycomb	902031952	902031953	902031955	9020319511
		🔆 26°	1182		without honeycomb	902031962	902031963	902031965	9020319611
		🔆 36°			with honeycomb	902031972	902031973	902031975	9020319711
		🔆 36°	1182		without honeycomb	902031982	902031983	902031985	9020319811
		🔆 60°	1098		without honeycomb	902031992	902031993	902031995	9020319911


			lm		white	sand	aluminum	black
3000K	xxV	🔆 15°		with honeycomb	902011932	902011933	902011935	9020119311
12W led		🔆 15°	1288	without honeycomb	902011942	902011943	902011945	9020119411
15W total		🔆 26°		with honeycomb	902011952	902011953	902011955	9020119511
		🔆 26°	1230	without honeycomb	902011962	902011963	902011965	9020119611
		🔆 36°		with honeycomb	902011972	902011973	902011975	9020119711
		🔆 36°	1230	without honeycomb	902011982	902011983	902011985	9020119811
		🔆 60°	1144	without honeycomb	902011992	902011993	902011995	9020119911

Muse Spot 01 Bollard

h 31.5"

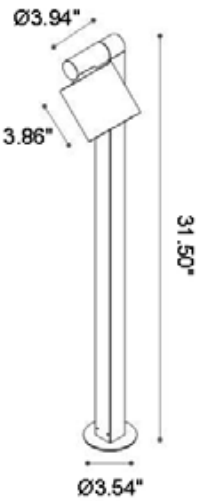

Available finishes:



Light Source
Supply
CRI

cob led
xxV
≥80


IP rating
Application
Diffuser

65
ground
transparent tempered glass

Power
Led Color temp.


12W led/15W total
2700/3000K

SUPPORT ONLY:



		lm			white	sand	aluminum	black
2700K 12W led 15W total	xxV	▲ 15°	1237	with honeycomb	9020311002	9020311003	9020311005	90203110011
		▲ 15°		without honeycomb	9020311012	9020311013	9020311015	90203110111
		▲ 26°	1182	with honeycomb	9020311022	9020311023	9020311025	90203110211
		▲ 26°		without honeycomb	9020311032	9020311033	9020311035	90203110311
		▲ 36°	1182	with honeycomb	9020311042	9020311043	9020311045	90203110411
		▲ 36°		without honeycomb	9020311052	9020311053	9020311055	90203110511
		▲ 60°	1098	without honeycomb	9020311062	9020311063	9020311065	90203110611

		lm			white	sand	aluminum	black
3000K 12W led 15W total	xxV	▲ 15°	1288	with honeycomb	9020111002	9020111003	9020111005	90201110011
		▲ 15°		without honeycomb	9020111012	9020111013	9020111015	90201110111
		▲ 26°	1230	with honeycomb	9020111022	9020111023	9020111025	90201110211
		▲ 26°		without honeycomb	9020111032	9020111033	9020111035	90201110311
		▲ 36°	1230	with honeycomb	9020111042	9020111043	9020111045	90201110411
		▲ 36°		without honeycomb	9020111052	9020111053	9020111055	90201110511
		▲ 60°	1144	without honeycomb	9020111062	9020111063	9020111065	90201110611

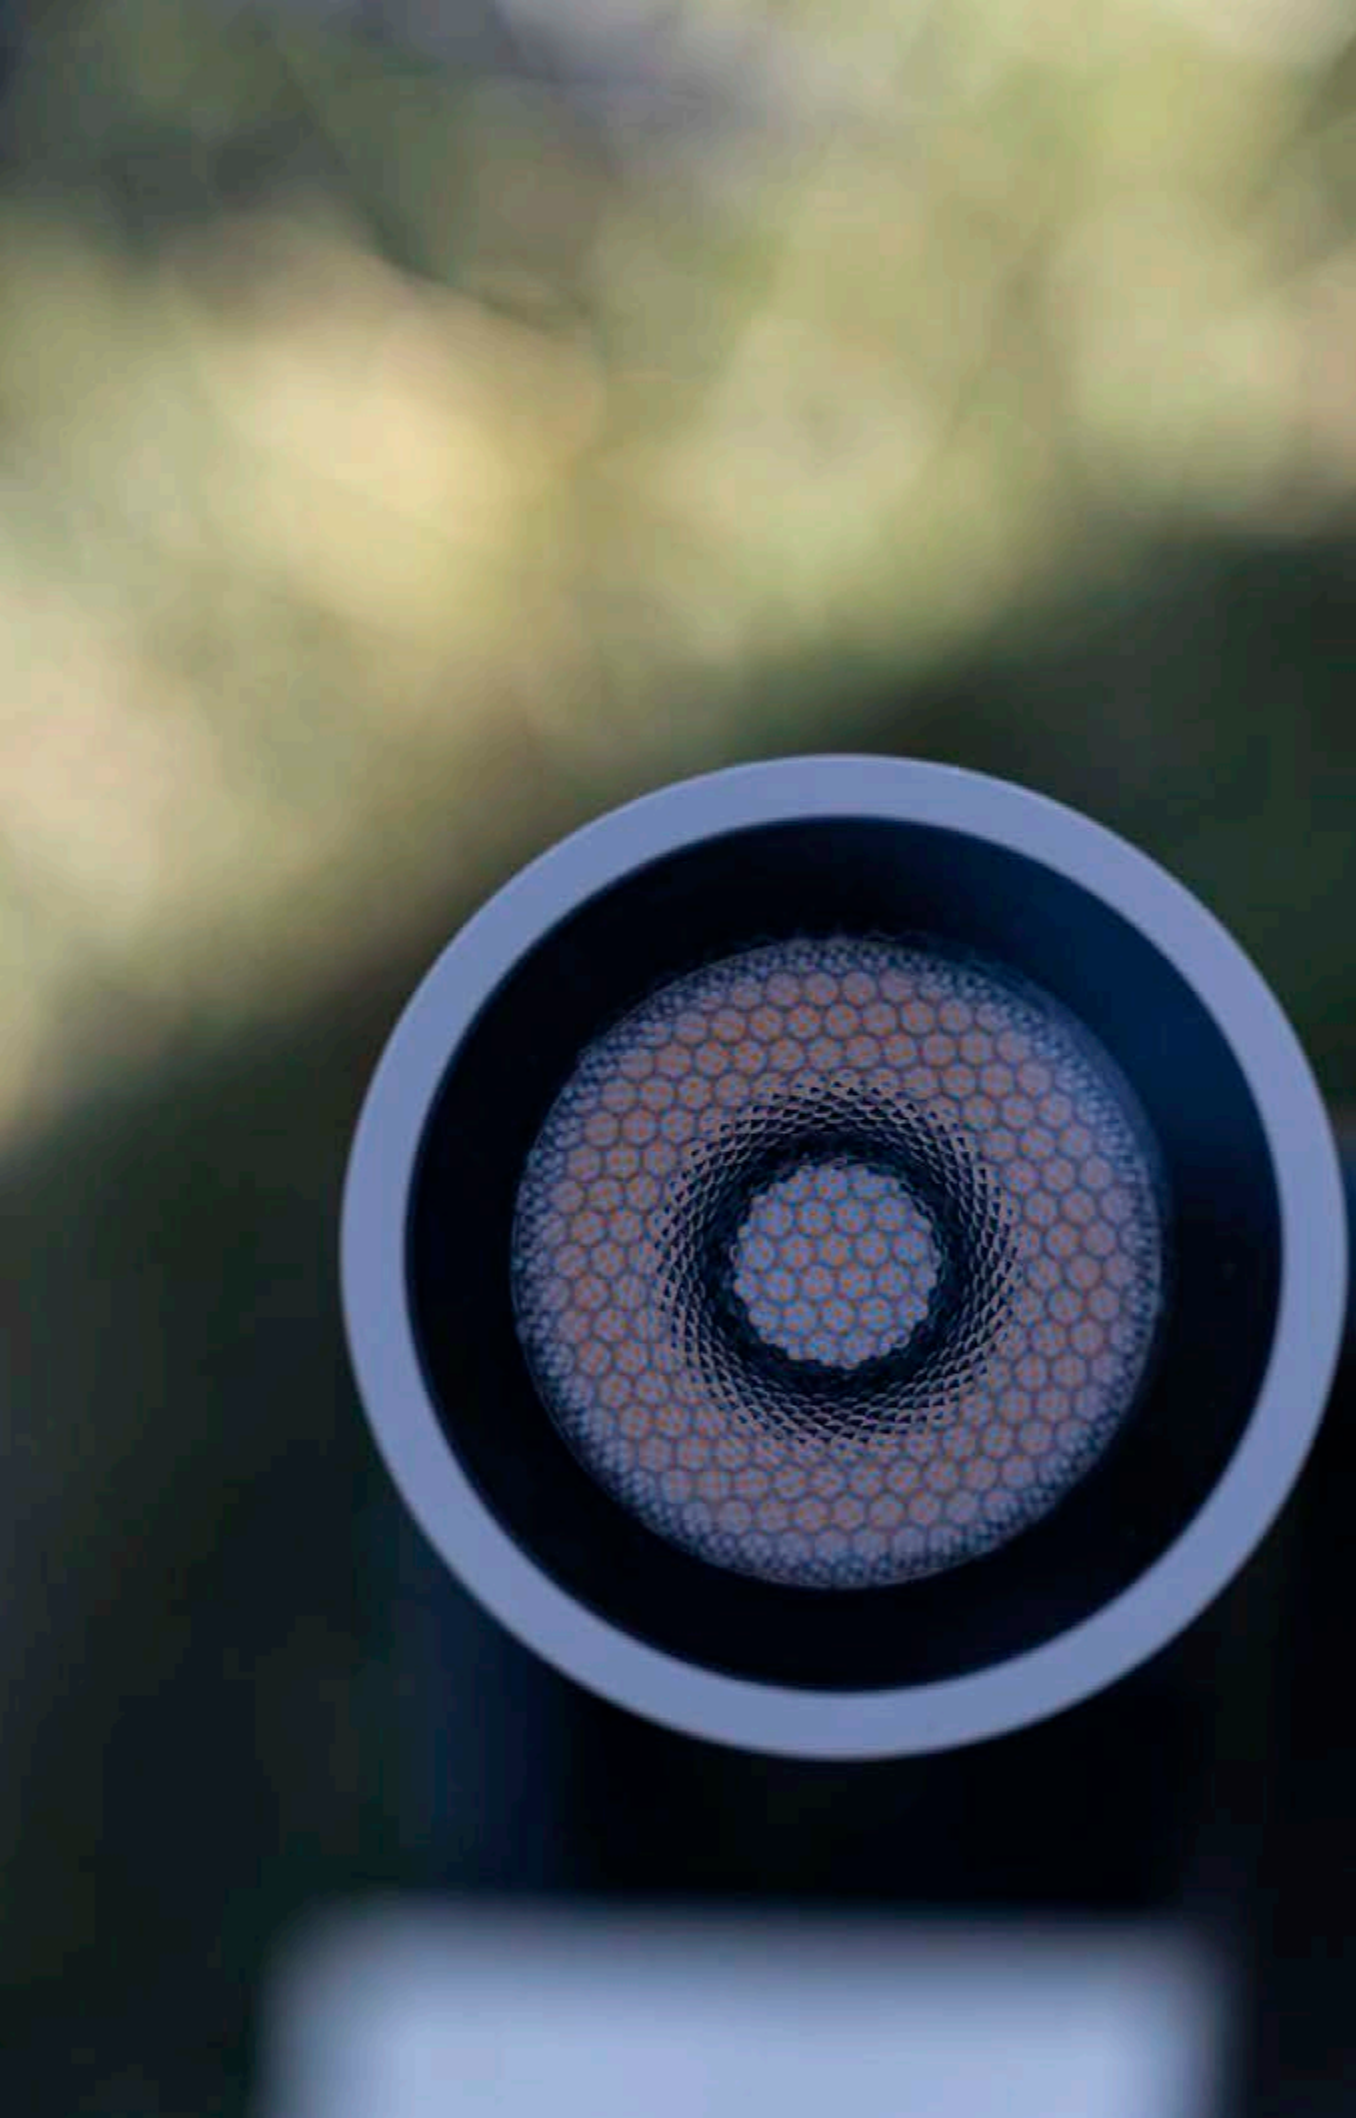






Muse Turn Box

Spot 02



Available finishes:



Light Source
Supply
CRI


power led
xxV
≥80

Power
Led Color temp.

xxV 2W led - 2.8W total
2700/3000K

IP rating
Application
Diffuser

65
wall, ground, roof
transparent tempered glass




			lm		black
2700K	xxV	 18°	98	with honeycomb	9020311111
2W led		 18°	103	without honeycomb	9020311211
2.8W total		 36°	74	with honeycomb	9020311311
		 36°	222	without honeycomb	9020311411
			lm		black
3000K	xxV	 18°	103	with honeycomb	9020111111
2W led		 18°	178	without honeycomb	9020111211
2.8W total		 36°	78	with honeycomb	9020111311
		 36°	234	without honeycomb	9020111411



Muse Turn Box

Spot 03



Available finishes:



black

Light Source
Supply
CRI

power led
xxV
≥80

Power
Led Color temp.

xxV 5.8W led - 8.6W total
2700/3000K

IP rating
Application
Diffuser

65
wall, ground, roof
transparent tempered glass



				lm	black
2700K	xxV	10°	with honeycomb	243	90203110711
5.8W led		10°	without honeycomb	405	90203110811
8.6W total		26°	with honeycomb	251	9020311511
		26°	without honeycomb	432	9020311611
		52°	with honeycomb	135	9020311711
		52°	without honeycomb	409	9020311811

				lm	black
3000K	xxV	10°	with honeycomb	253	90201110711
5.8W led		10°	without honeycomb	422	90201110811
8.6W total		26°	with honeycomb	264	9020111511
		26°	without honeycomb	455	9020111611
		52°	with honeycomb	142	9020111711
		52°	without honeycomb	431	9020111811








Muse Spot 04

bollard h 11.8"



Available finishes:



black

Light Source
Supply
Dimmer
CRI

power led
24V
only 24V (PWM)
≥80

Power
Led Color temp.

24V 5.8W led - 6.3W
total 2700/3000K

IP rating
Application
Diffuser

65
ground
transparent tempered glass




		lm		black	
2700K 5.8W led 6.3Wtotal	24V	▲ 10°	243	with honeycomb	90203210911
		▲ 10°	405	without honeycomb	90203211011
		▲ 26°	251	with honeycomb	90203219111
		▲ 26°	432	without honeycomb	90203220111
		▲ 52°	135	with honeycomb	90203221111
		▲ 52°	409	without honeycomb	90203222111

		lm		black	
3000K 5.8W led 6.3Wtotal	24V	▲ 10°	253	with honeycomb	90201210911
		▲ 10°	422	without honeycomb	90201211011
		▲ 26°	264	with honeycomb	90201219111
		▲ 26°	455	without honeycomb	90201220111
		▲ 52°	142	with honeycomb	90201221111
		▲ 52°	431	without honeycomb	90201222111

Muse Spot 04

bollard h 19.7"

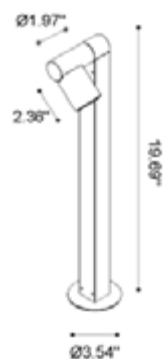

Available finishes:



black

Light Source
Supply
Dimmer
CRI


power led
24V
only 24V (PWM)
≥80

Power
Led Color temp.

24V 5.8W led - 6.3W total
2700/3000K

IP rating
Application
Diffuser

65
ground
transparent tempered glass



		lm		black	
2700K	24V	▲ 10°	243	with honeycomb	90203211111
5.8W led		▲ 10°	405	without honeycomb	90203211211
6.3W total		▲ 26°	251	with honeycomb	9020322311
		▲ 26°	432	without honeycomb	9020322411
		▲ 52°	135	with honeycomb	9020322511
		▲ 52°	409	without honeycomb	9020322611

		lm		black	
3000K	24V	▲ 10°	253	with honeycomb	90201211111
5.8W led		▲ 10°	422	without honeycomb	90201211211
6.3W total		▲ 26°	264	with honeycomb	9020122311
		▲ 26°	455	without honeycomb	9020122411
		▲ 52°	142	with honeycomb	9020122511
		▲ 52°	431	without honeycomb	9020122611

Muse Spot 04

bollard h 31.5"



Available finishes:




Light Source power led
Supply 24V
Dimmer only 24V (PWM)
CRI ≥80
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5.8W led- 6.3W total
Led Color temp. 2700/3000K



		lm		black	
2700K	24V	10°	243	with honeycomb	90203211311
5.8W led		10°	405	without honeycomb	90203211411
6.3W total		26°	251	with honeycomb	90203227111
		26°	432	without honeycomb	90203228111
		52°	135	with honeycomb	90203229111
		52°	409	without honeycomb	90203230111

		lm		black	
3000K	24V	10°	253	with honeycomb	90201211311
5.8W led		10°	422	without honeycomb	90201211411
6.3W total		26°	264	with honeycomb	90201227111
		26°	455	without honeycomb	90201228111
		52°	142	with honeycomb	90201229111
		52°	431	without honeycomb	90201230111

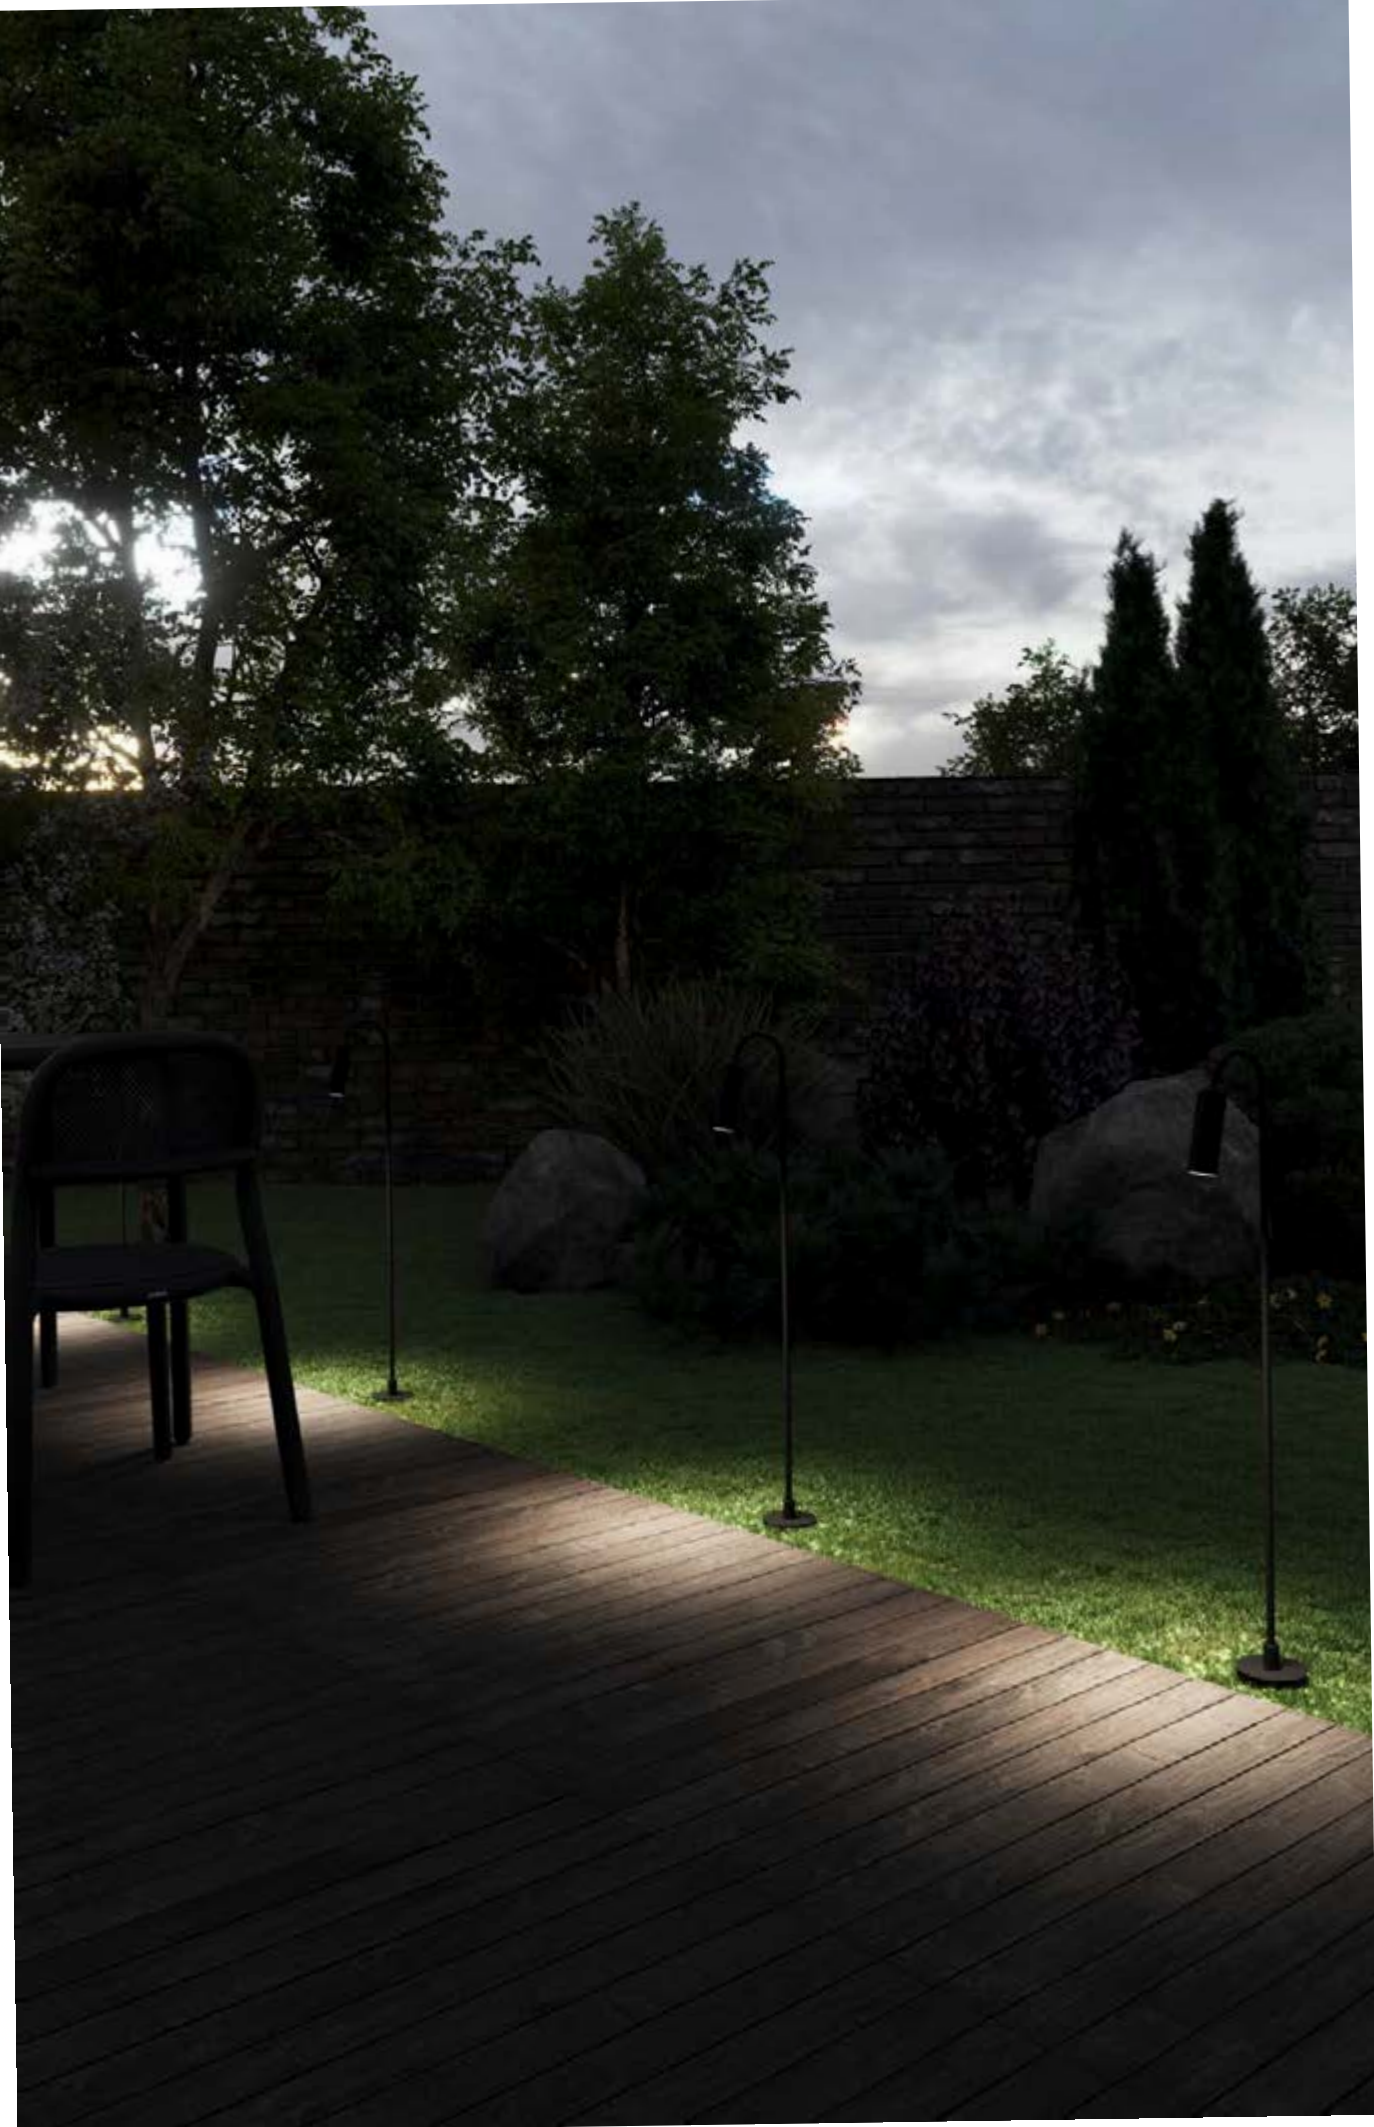



Muse Spot 02 Bend-Shape Stem

h mφ7"



Available finishes:



black

Light Source
Supply
Dimmer
CRI

power led
24V
only 24V (PWM)
≥80

Power
Led Color temp.

24V 2W led- 3W
2700/3000K

IP rating
Application
Diffuser

65
ground
transparent tempered glass



WITH BASE

				lm		black
2700K	24V	18°	98	with honeycomb	9020323111	
2W led		18°	169	without honeycomb	9020323211	
3W 2700K		36°	75	with honeycomb	9020323511	
		36°	224	without honeycomb	9020323611	

				lm		black
3000K	24V	18°	103	with honeycomb	9020123111	
2W led		18°	178	without honeycomb	9020123211	
3W 3000K		36°	79	with honeycomb	9020123511	
		36°	236	without honeycomb	9020123611	


WITH SPIKE

				lm		black
2700K	24V	18°	98	with honeycomb	9020323311	
2W led		18°	169	without honeycomb	9020323411	
3W 2700K		36°	75	with honeycomb	9020323711	
		36°	224	without honeycomb	9020323811	

				lm		black
3000K	24V	18°	103	with honeycomb	9020123311	
2W led		18°	178	without honeycomb	9020123411	
3W 3000K		36°	79	with honeycomb	9020123711	
		36°	236	without honeycomb	9020123811	

Muse Spot 02 Bend-Shape Stem

h 31.5"

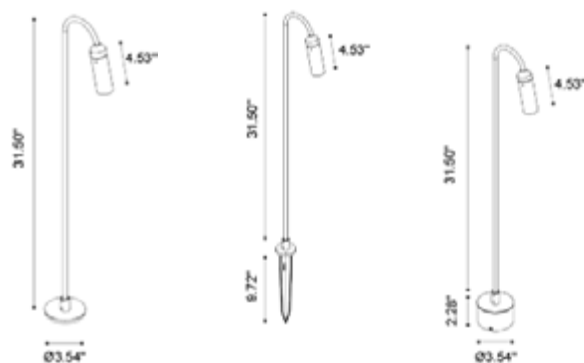

Available finishes:



black

Light Source
Supply
Dimmer
CRI

power led
24V
only 24V (PWM)
≥80

Power
Led Color temp.

24V 2W led- 3W total
2700/3000K

IP rating
Application
Diffuser

65
ground
transparent tempered glass



WITH BASE

				lm		black
2700K	24V	18°	98	with honeycomb	9020323911	
2W led		18°	169	without honeycomb	9020324011	
3W total		36°	75	with honeycomb	9020324311	
		36°	224	without honeycomb	9020324411	

				lm		black
3000K	24V	18°	103	with honeycomb	9020123911	
2W led		18°	178	without honeycomb	9020124011	
3W total		36°	79	with honeycomb	9020124311	
		36°	236	without honeycomb	9020124411	

WITH SPIKE

				lm		black
2700K	24V	18°	98	with honeycomb	9020324111	
2W led		18°	169	without honeycomb	9020324211	
3W total		36°	75	with honeycomb	9020324511	
		36°	224	without honeycomb	9020324611	

				lm		black
3000K	24V	18°	103	with honeycomb	9020124111	
2W led		18°	178	without honeycomb	9020124211	
3W total		36°	79	with honeycomb	9020124511	
		36°	236	without honeycomb	9020124611	

Muse Spot 03 Bend-Shape Stem

h 19.7"



Available finishes:



black


Light Source
Supply
Dimmer
CRI

IP rating
Application
Diffuser

power led
24V
only 24V (PWM)
≥80
65
ground
transparent tempered glass

Power
Led Color temp.

24V 5.8W led- 6.3W total
2700/3000K



WITH BASE

			lm	black
2700K	24V	10°	243	with honeycomb 90203211511
5.8W led		10°	405	without honeycomb 90203211611
6.3W total		26°	251	with honeycomb 9020324711
		26°	432	without honeycomb 9020324811
		52°	135	with honeycomb 9020325111
		52°	409	without honeycomb 9020325211

3000K	24V	10°	253	with honeycomb 90201211511
5.8W led		10°	422	without honeycomb 90201211611
6.3W total		26°	264	with honeycomb 9020124711
		26°	455	without honeycomb 9020124811
		52°	142	with honeycomb 9020125111
		52°	431	without honeycomb 9020125211


WITH SPIKE

			lm	black
2700K	24V	10°	243	with honeycomb 90203211711
5.8W led		10°	405	without honeycomb 90203211811
6.3W total		26°	251	with honeycomb 9020324911
		26°	432	without honeycomb 9020325011
		52°	135	with honeycomb 9020325311
		52°	409	without honeycomb 9020325411

3000K	24V	10°	253	with honeycomb 90201211711
5.8W led		10°	422	without honeycomb 90201211811
6.3W total		26°	264	with honeycomb 9020124911
		26°	455	without honeycomb 9020125011
		52°	142	with honeycomb 9020125311
		52°	431	without honeycomb 9020125411

Muse Spot 03 Bend-Shape Stem

h 31.5"

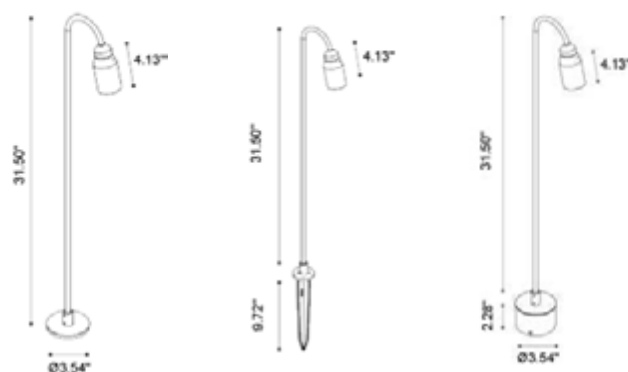

Available finishes:



black


Light Source
Supply
Dimmer
CRI

power led
24V
only 24V (PWM)
≥80

Power 24V 5.8W led- 6.3W total
Led Color temp. 2700/3000K

IP rating
Application
Diffuser

65
ground
transparent tempered glass



WITH BASE

				lm		black
2700K	24V	▲ 10°	243	with honeycomb	90203211911	
5.8W led		▲ 10°	405	without honeycomb	90203212011	
6.3W total		▲ 26°	251	with honeycomb	9020325511	
		▲ 26°	432	without honeycomb	9020325611	
		▲ 52°	135	with honeycomb	9020325911	
		▲ 52°	409	without honeycomb	9020326011	

3000K	24V	▲ 10°	253	with honeycomb	90201211911	
5.8W led		▲ 10°	422	without honeycomb	90201212011	
6.3W total		▲ 26°	264	with honeycomb	9020125511	
		▲ 26°	455	without honeycomb	9020125611	
		▲ 52°	142	with honeycomb	9020125911	
		▲ 52°	431	without honeycomb	9020126011	


WITH SPIKE

				lm		black
2700K	24V	▲ 10°	243	with honeycomb	90203212111	
5.8W led		▲ 10°	405	without honeycomb	90203212211	
6.3W total		▲ 26°	251	with honeycomb	9020315711	
		▲ 26°	432	without honeycomb	9020325811	
		▲ 52°	135	with honeycomb	9020326111	
		▲ 52°	409	without honeycomb	9020326211	

3000K	24V	▲ 10°	253	with honeycomb	90201212111	
5.8W led		▲ 10°	422	without honeycomb	90201212211	
6.3W total		▲ 26°	264	with honeycomb	9020125711	
		▲ 26°	455	without honeycomb	9020125811	
		▲ 52°	142	with honeycomb	9020126111	
		▲ 52°	431	without honeycomb	9020126211	



ACCESSORIES



Anchor bolts
Ø3.46 x 6.50 in

code **9062**
