


MICRO PIXL 14 RECESSED


Pixl is a family of recessed or ceiling mounted linear downlights that provide low glare lighting for indoor applications. The Micro Pixl 14 Recessed is the miniature 14 LED recessed version that is available in 2 color temperatures, 65° beam angle and 2 standard finishes.

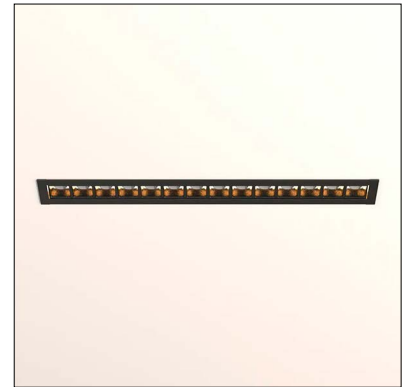

TECHNICAL DATA

Wattage / Input	9.8W
Power Supply	Remote 500mA, not included. See page 2.
Construction	Body: Aluminum
CCT	2700K, 3000K
CRI	90
Delivered Lumens	1391 lm (3000K)
Efficacy	141.9 lm/W (3000K)
Optics	65°
Finishes	Textured White, Textured Black
LED Source	LED ARRAY L278
Lumen Maintenance	50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Fixture Dimensions	11.65" x 1.42" x 1.85" h
Fixture Weight	1.10 lbs
IP Rating	IP20

Fixture Dimensions

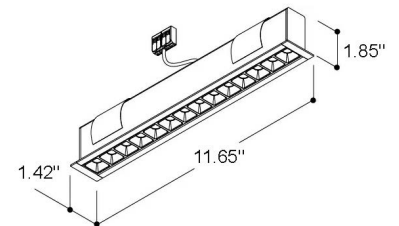

ORDERING INFORMATION

Example: T417726. Accessories / Power Supplies ordered separately.

T4177	
Model No.	Description
T4177 (Micro 14 Recessed)	47 - 2700K, Text. White 37 - 3000K, Text. White 26 - 2700K, Text. Black 16 - 3000K, Text. Black

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-1
PPLT00656-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2	1-2
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-2


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1
PPLT00676	PEQ0E	PEQ0	100%-0.1%	Hi-Lume Premier 0.1% EcoSystem™ LED Driver	120-277VAC to 500mA, 20W, Class 2	1-2

For other power supply options consult factory.

ACCESSORIES

Installation

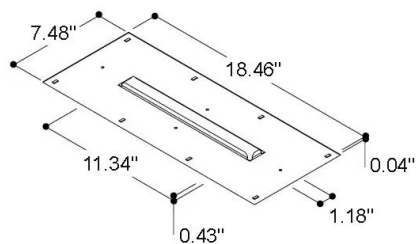


T417799

Frame for plaster

18.46 x 7.48 in

Installation depth 0.04 in



T417797

Frame + Box for plaster

18.46 x 7.48 in

Installation depth 0.04 in

Box: 16.93 x 4.02 x 3.43 h in

Job Name/Date:

Fixture Type Designation: