

MICRO PIXEL 6 RECESSED

designplan®

datasheet


Pixel is a family of recessed or ceiling mounted linear downlights that provide low glare lighting for indoor applications. The Micro Pixel 6 Recessed is the miniature 6 LED recessed version that is available in 2 color temperatures, 65° beam angle and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	6.2W
Power Supply	Remote 180mA, not included. See page 2.
Construction	Body: Aluminum
CCT	2700K, 3000K
CRI	90
Delivered Lumens	827 lm (3000K)
Efficacy	133.4 lm/W (3000K)
Optics	65°
Finishes	Textured White, Textured Black
LED Source	LED ARRAY L119
Lumen Maintenance	50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Fixture Dimensions	5.35" x 1.42" x 1.85" h
Fixture Weight	0.88 lbs
IP Rating	IP20

Fixture Dimensions

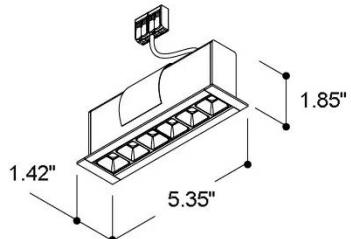

ORDERING INFORMATION

Example: T417626. Accessories / Power Supplies ordered separately.

T4176	
Model No.	Description
T4176 (Micro 6 Recessed)	47 - 2700K, Text. White 37 - 3000K, Text. White 26 - 2700K, Text. Black 16 - 3000K, Text. Black

Job Name/Date:

Fixture Type Designation:

MICRO PIXL 6 RECESSED

designplan®

datasheet


SUGGESTED POWER SUPPLIES

180mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00656-P	0-10V Dimming to 1.0%	120-277VAC to 180mA, 20W, Class 2	1-1
PPLT00655-P	0-10V Dimming to Dark	120-277VAC to 180mA, 50W, Class 2	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 180mA, 100W, Class 2	1-1


For other power supply options consult factory.

ACCESSORIES - Installation

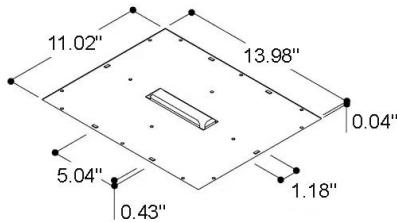

T417699

Frame for plaster
13.98 x 11.02 in
Cut-out

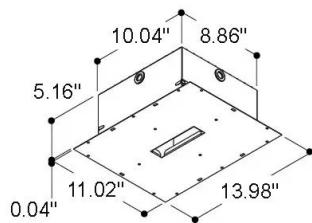

T417697

Frame + Box for plaster
13.98 x 11.02 in
Cut-out:

Job Name/Date:

Fixture Type Designation: