

MUSE STILLA DECO BEND SHAPE


MUSE is a modular outdoor lamp system that offers multiple lighting solutions based on the needs of the user, by combining one of the 3 emission sources - CAPSULE, STILLA and SPOT - with various installation accessories. MUSE STILLA DECO BEND SHAPE is floor or ground mounted bollard in 2 heights - 19.7" or 31.5" - with an extra resilient glass cylinder on a curved stem. It is available with a base or ground spike and 2 color temperatures.



TECHNICAL DATA

Wattage	1.5W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Anodized Aluminum Lens: Sandblasted Glass
CCT	2700K, 3000K
CRI	>90
BUG Rating	B0-U2-G1 (3000K)
Delivered Lumens	255 lm (3000K)
Efficacy	170 lm/W
Optics	Diffuse
Finishes	Black
Fixture Dimensions	Head: Ø1.42" x 4.88" Stem: 19.7" or 31.5" Base: Ø3.54" / Spike: 9.72"
LED Source	Mid Power LED
IP Rating	IP65
Impact Resistance	IK05

Fixture Dimensions

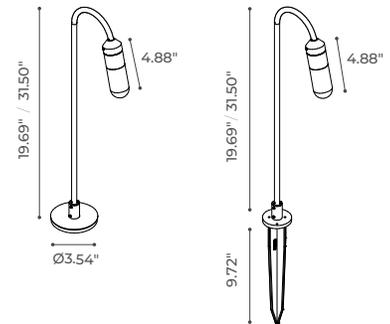

ORDERING INFORMATION

Example: D902032677.US. Power supplies / accessories ordered separately.

D9020			7	US
Model No.	CCT	Height / Installation	Finish	
D9020	32 - 2700K	66 - 19.7" with Base	7 - Black	US
	12 - 3000K	67 - 19.7" with Spike		
		68 - 31.5" with Base		
		69 - 31.5" with Spike		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-5
PPLT00543	0-10V Dimming (to 15%) (-40°C / -40°F cold start)	120-277VAC to 24VDC, 100W, Class 2	7-53

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-51

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-51

For other power supply options consult factory.


PHOTOMETRIC DATA

Maximum Candela = 97.9

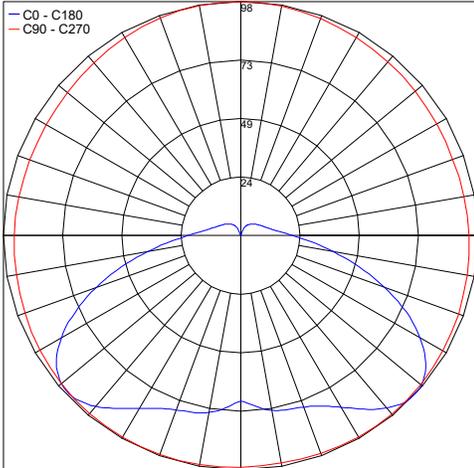

PHOTOMETRIC FILENAME : MUSE-STILLA-2700K-SHORT-GLASS-24V/IES

Maximum Candela = 102

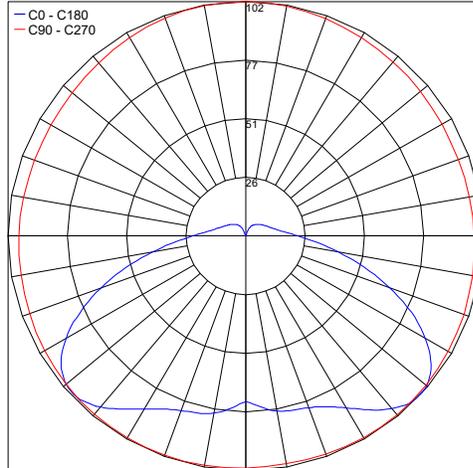

PHOTOMETRIC FILENAME : MUSE-STILLA-3000K-SHORT-GLASS-24V/IES

Job Name/Date:

Fixture Type Designation: