

# MUSE STILLA DECO COPPER


MUSE is a modular outdoor lamp system that offers multiple lighting solutions based on the needs of the user, by combining one of the 3 emission sources - CAPSULE, STILLA and SPOT - with various installation accessories. MUSE STILLA DECO COPPER is floor or ground mounted bollard with an extra resilient glass cylinder on a thin copper stem. It is available with a base or spike and 2 color temperatures.



## TECHNICAL DATA

<b>Wattage</b>	1.5W
<b>Power Supply</b>	Remote 24VDC, not included. See page 2.
<b>Construction</b>	Body: Anodized Aluminum Lens: Sandblasted Glass
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>90
<b>BUG Rating</b>	B0-U2-G1 (3000K)
<b>Delivered Lumens</b>	255 lm (3000K)
<b>Efficacy</b>	170 lm/W
<b>Optics</b>	Diffuse
<b>Finishes</b>	Black, Bronze
<b>Fixture Dimensions</b>	Head: Ø1.42" x 4.88" Stem: About 3.28 ft (39.36") Base: Ø3.54" / Spike: 9.72"
<b>LED Source</b>	Mid Power LED
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK05

## Fixture Dimensions

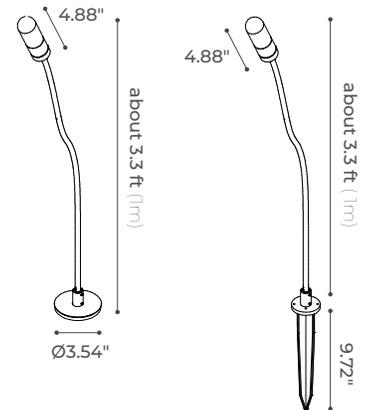

## ORDERING INFORMATION

Example: D902031659.US. Power supplies / accessories ordered separately.

D9020			US
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>	
D9020	3265 - 2700K, with base 3165 - 2700K, with spike 1265 - 3000K, with base 1165 - 3000K, with spike	9 - Bronze 7 - Black	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00149</a>	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-5
<a href="#">PPLT00543</a>	0-10V Dimming (to 15%) (-40°C / -40°F cold start)	120-277VAC to 24VDC, 100W, Class 2	7-53

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-51

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-51

For other power supply options consult factory.


## PHOTOMETRIC DATA

Maximum Candela = 97.9

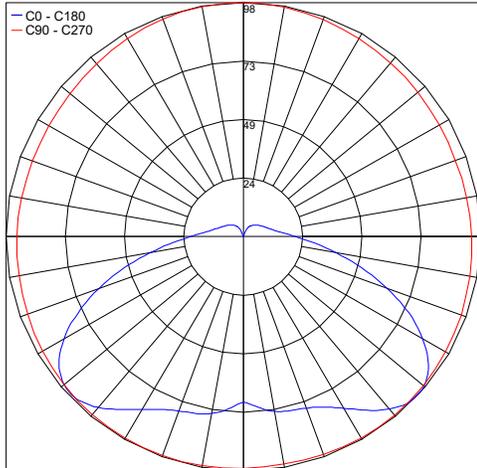

PHOTOMETRIC FILENAME : MUSE-STILLA-2700K-SHORT-GLASS-24V.IES

Maximum Candela = 102

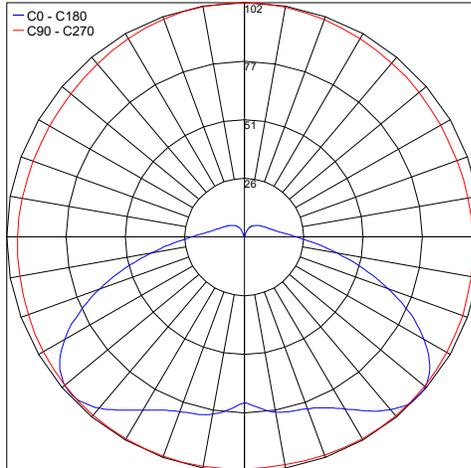

PHOTOMETRIC FILENAME : MUSE-STILLA-3000K-SHORT-GLASS-24V.IES

Job Name/Date:

Fixture Type Designation: