


PIXL 4 RECESSED


Pixl is a family of recessed or ceiling mounted linear downlights that come in 4 or 7 module sizes and provide low glare lighting for indoor applications. The Pixl 4 Recessed is the 4 LED recessed version that is available in 2 color temperatures, 2 optics options and 2 standard finishes.

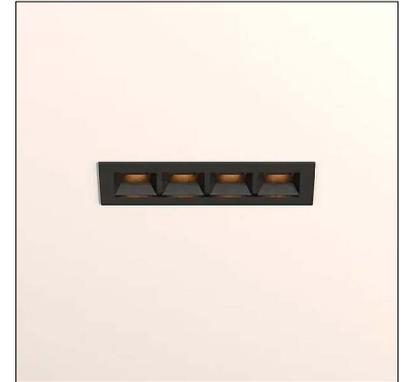


TECHNICAL DATA

Wattage	8W
Power Supply	Remote 350mA, not included. See page 2.
Construction	Body: Aluminum
CCT	2700K, 3000K
CRI	90
Delivered Lumens	1057 lm (3000K, 50°)
Efficacy	132.1 lm/W (3000K, 50°)
Optics	50°, 80°
Finishes	Textured White, Textured Black
LED Source	LED ARRAY L139
Lumen Maintenance	50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Fixture Dimensions	7.09" x 2.36" x 2.13" h
Cut-Out Dimensions	6.69" x 2.05" (Installation Depth 2.36")
Fixture Weight	0.71 lbs
IP Rating	IP20

Fixture Dimensions



LEAF



TORSION

ORDERING INFORMATION

Example: T417026. Accessories / Power Supplies ordered separately.

Model No.	Description
T4170 - TORSION (Recessed)	47 - 2700K, Text. White, 50°
T4171 - LEAF (Recessed)	67 - 2700K, Text. White, 80°
	26 - 2700K, Text. Black, 50°
	46 - 2700K, Text. Black, 80°
	37 - 3000K, Text. White, 50°
	57 - 3000K, Text. White, 80°
	16 - 3000K, Text. Black, 50°
	36 - 3000K, Text. Black, 80°

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

ACCESSORIES

Installation

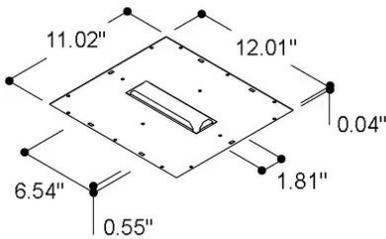


T417099

Frame for plaster

12.01" x 11.02"

Cut-out: 6.89" x 2.17" x 2.36" h

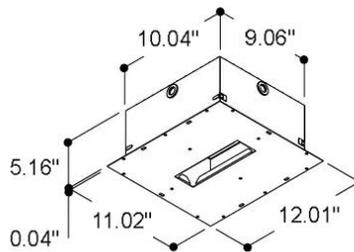

T417097

Frame & Box for plaster

12.01" x 11.02"

Cut-out: 10.24" x 9.25" x 5.31" h


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: Photometry is 3000K

Maximum Candela = 754.3

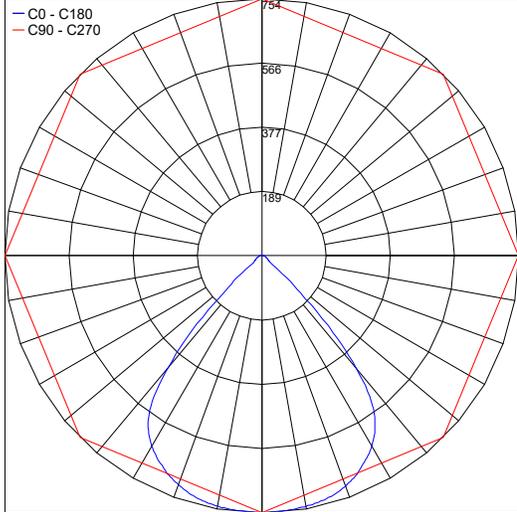

PHOTOMETRIC FILENAME : PIXL 4 RECESSED LEAF 3000K 8W.IES

Maximum Candela = 718.3

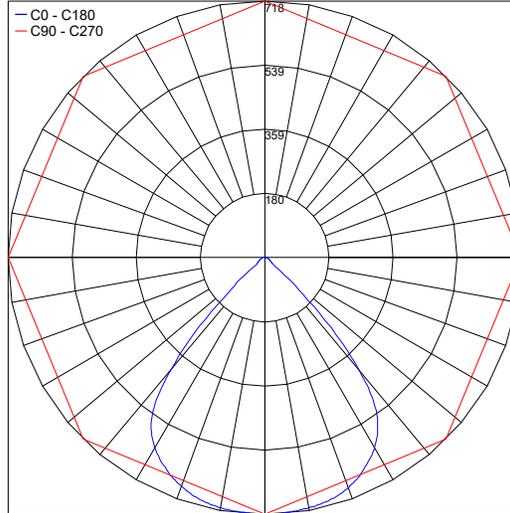

PHOTOMETRIC FILENAME : PIXL 4 RECESSED TORSION 3000K 8W.IES

Job Name/Date:

Fixture Type Designation: