



Pixl is a family of recessed or ceiling mounted linear downlights that come in 4 or 7 module sizes and provide low glare lighting for indoor applications. The Pixl 4 Surface is the 4 LED ceiling mounted version that is available in 2 color temperatures, 2 optics options and 2 standard finishes.

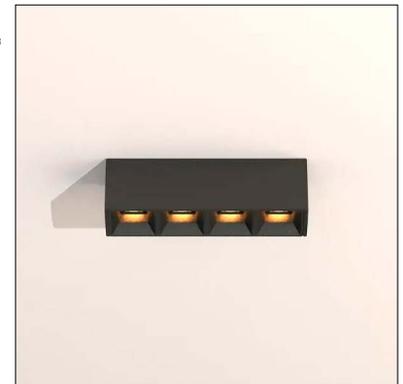

## TECHNICAL DATA

<b>Wattage</b>	8W
<b>Power Supply</b>	Remote 350mA, not included. See page 2.
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	90
<b>Delivered Lumens</b>	1057 lm (3000K, 50°)
<b>Efficacy</b>	133.8 lm/W (3000K, 50°)
<b>Optics</b>	50°, 80°
<b>Finishes</b>	Textured White, Textured Black
<b>LED Source</b>	LED ARRAY L139
<b>Lumen Maintenance</b>	50,000 hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Fixture Dimensions</b>	6.54" x 1.57" x 2.05" h
<b>Fixture Weight</b>	0.58 lbs
<b>IP Rating</b>	IP20

Fixture Dimensions



## ORDERING INFORMATION

Example: T417426. Power Supplies ordered separately.

Model No.	Description
T4174 (Surface Mount)	<p><b>47</b> - 2700K, Text. White, 50°</p> <p><b>67</b> - 2700K, Text. White, 80°</p> <p><b>26</b> - 2700K, Text. Black, 50°</p> <p><b>46</b> - 2700K, Text. Black, 80°</p> <p><b>37</b> - 3000K, Text. White, 50°</p> <p><b>57</b> - 3000K, Text. White, 80°</p> <p><b>16</b> - 3000K, Text. Black, 50°</p> <p><b>36</b> - 3000K, Text. Black, 80°</p>

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00497</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: All Photometry is 2700K

Maximum Candela = 685

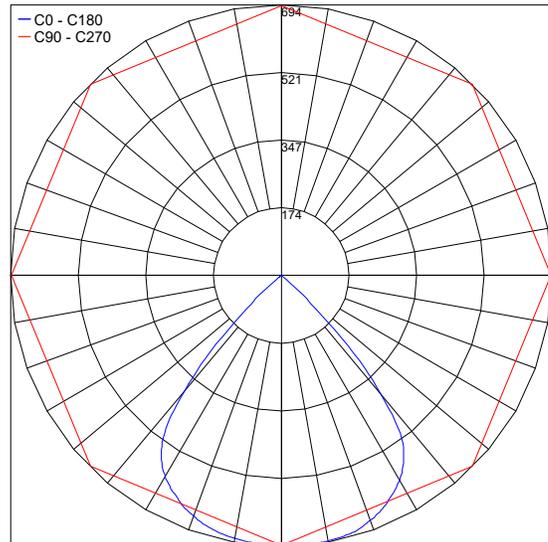

PHOTOMETRIC FILENAME : PIXL 4 CEILING MOUNTED 2700K 80°.IES

Job Name/Date:

Fixture Type Designation: