


PIXL 7 RECESSED


Pixl is a family of recessed or ceiling mounted linear downlights that come in 4 or 7 module sizes and provide low glare lighting for indoor applications. The Pixl 7 Recessed is the 7 LED recessed version that is available in 2 color temperatures, 2 optics options and 2 standard finishes.

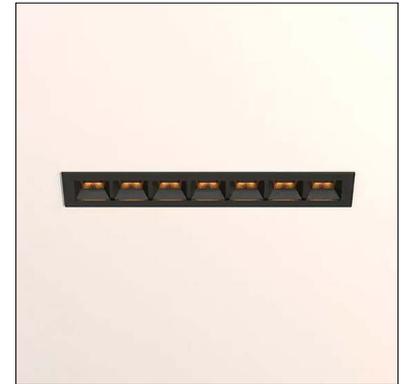


TECHNICAL DATA

Wattage	14W
Power Supply	Remote 350mA, not included. See page 2.
Construction	Body: Aluminum
CCT	2700K, 3000K
CRI	90
Delivered Lumens	1885 lm (2700K, 80°)
Efficacy	134.6 lm/W (2700K, 80°)
Optics	50°, 80°
Finishes	Textured White, Textured Black
LED Source	LED ARRAY L278
Lumen Maintenance	50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Fixture Dimensions	11.81" x 2.36" x 2.13" h
Cut-out Dimensions	11.42" x 2.05" (Installation Depth 2.36")
Fixture Weight	1.46 lbs
IP Rating	IP20

Fixture Dimensions



LEAF



TORSION

ORDERING INFORMATION

Example: T417326. Accessories / Power Supplies ordered separately.

Model No.	Description
T4173 - LEAF (Recessed)	47 - 2700K, Text. White, 50°
T4172 - TORSION (Recessed)	67 - 2700K, Text. White, 80°
	26 - 2700K, Text. Black, 50°
	46 - 2700K, Text. Black, 80°
	37 - 3000K, Text. White, 50°
	57 - 3000K, Text. White, 80°
	16 - 3000K, Text. Black, 50°
	36 - 3000K, Text. Black, 80°

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00495	Phase Dim (120V only)	120VAC to 350mA, 25W, Class 2, IP66	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-1


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

For other power supply options consult factory.


ACCESSORIES

Installation

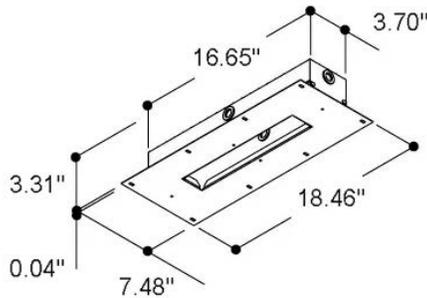

T417297

Frame + Box for plaster
18.46 x 7.48 in
Installation depth 0.04 in

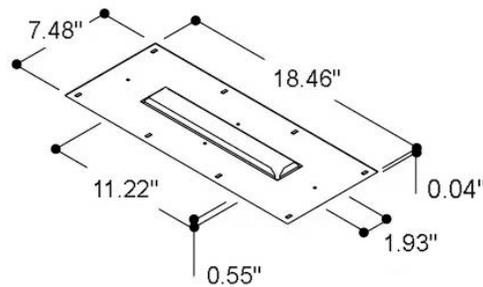

T417299

Frame for plaster
18.46 x 7.48 in
Installation depth 0.04 in


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: Photometry is 2700K

Maximum Candela = 1273.4

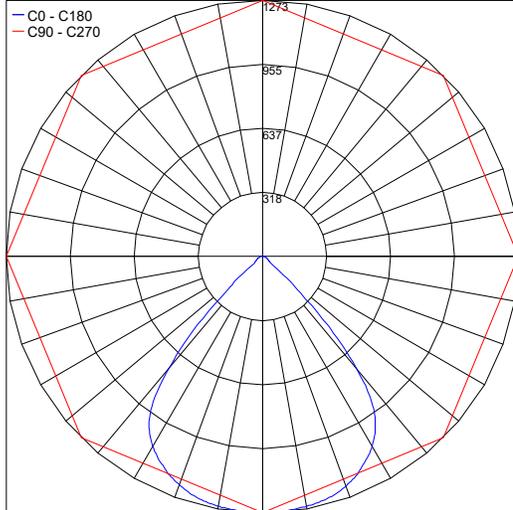

PHOTOMETRIC FILENAME : PIXL 7 RECESSED LEAF 2700K 14W.IES

Maximum Candela = 1231.2

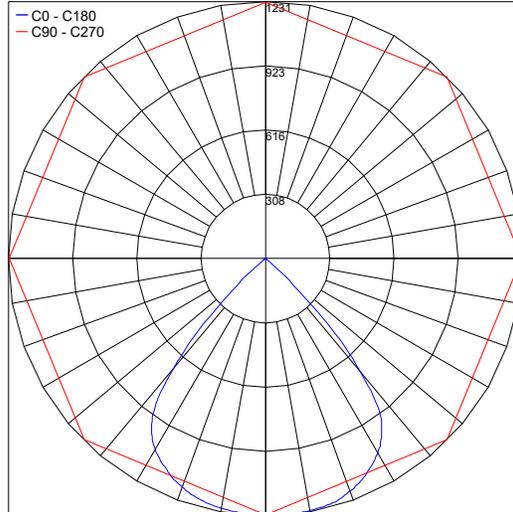

PHOTOMETRIC FILENAME : PIXL 7 RECESSED TORSION 2700K 14W.IES

Job Name/Date:

Fixture Type Designation: