

CUPOLA 1


Cupola is an IP67-rated, in-grade uplight suitable for ground or wall installation, perfect for marking paths, transforming corridors and lighting stairs. It comes in 3 color temperatures and 4 different directional beam options. Cupola 1 is the single direction beam version in stainless steel or black oxide finish.

TECHNICAL DATA

Wattage / Input	4W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Anodized Anticorodal Aluminum AISI 316L Stainless Steel Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	To be determined
Delivered Lumens	To be determined
Efficacy	To be determined
Optics	Asymmetric
Finishes	Stainless Steel, Black Oxide
Fixture Dimensions	Ø3.14" x 1.68" h
Cut-Out Size	Ø2.1"
Color Consistency	<3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driveover Capacity	Up to 6614 lbs



Fixture Dimensions

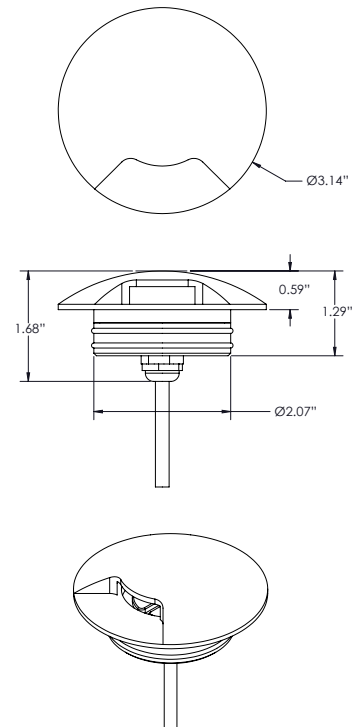

ORDERING INFORMATION

Example: CU1-L-30-AS-05. Accessories / Power Supplies ordered separately.

CU1-L	-		-	AS	-	
Model No.		CCT		Optic		Finish
CU1-L - Single Beam		27 - 2700K 30 - 3000K 40 - 4000K		AS - Asymmetric		05 - Stainless Steel BO - Black Oxide

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-20


SUGGESTED POWER SUPPLIES

Remote 24VDC Driver in NEMA 4X Enclosure - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-19

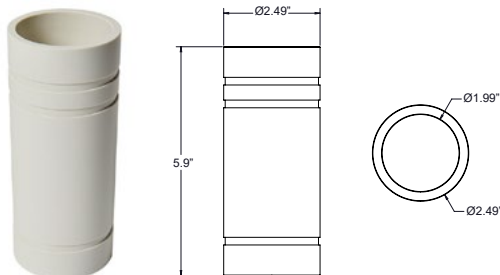
*For other power supply options consult factory.***ACCESSORIES - Installation****PPMP03486**

Core Drilled Application Sleeve

Sizes Ø2.5" x 5.9" h

*For in-grade use***PHOTOMETRIC DATA***Note: All photometric data is 3000K*

Maximum Candela = 1766.0

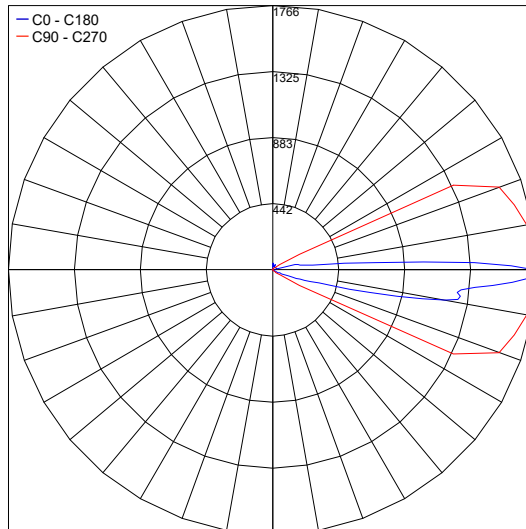

Job Name/Date:

Fixture Type Designation: