

# CUPOLA 2


Cupola is an IP67-rated, in-grade uplight suitable for ground or wall installation, perfect for marking paths, transforming corridors and lighting stairs. It comes in 3 color temperatures and 4 different directional beam options. Cupola 2 is the double direction beam version in a stainless steel finish.



## TECHNICAL DATA

<b>Wattage / Input</b>	4W
<b>Power Supply</b>	Remote 24VDC, not included. See page 2.
<b>Construction</b>	Body: Anodized Anticorodal Aluminum AISI 316L Stainless Steel Cable Length: 1.64'
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	To be determined
<b>Delivered Lumens</b>	To be determined
<b>Efficacy</b>	To be determined
<b>Optics</b>	Asymmetric
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	Ø3.14" x 1.68" h
<b>Cut-Out Size</b>	Ø2.1"
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP67
<b>Impact Resistance</b>	IK10
<b>Driveover Capacity</b>	Up to 6614 lbs

Fixture Dimensions

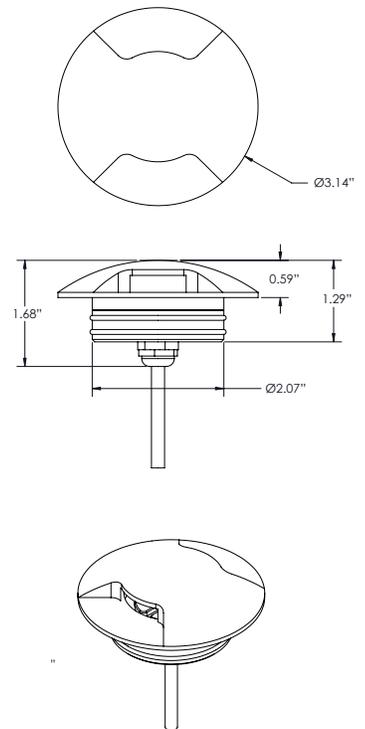

## ORDERING INFORMATION

Example: CU2-L-30-AS-05. Accessories / Power Supplies ordered separately.

CU2-L	-		-	AS	-	05
<b>Model No.</b>	<b>CCT</b>	<b>Optic</b>	<b>Finish</b>			
CU2-L - Double Beam	27 - 2700K 30 - 3000K 40 - 4000K	AS - Asymmetric	05 - Stainless Steel			

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-20

## SUGGESTED POWER SUPPLIES

Remote 24VDC Driver in NEMA 4X Enclosure - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-19

For other power supply options consult factory.

## ACCESSORIES - Installation

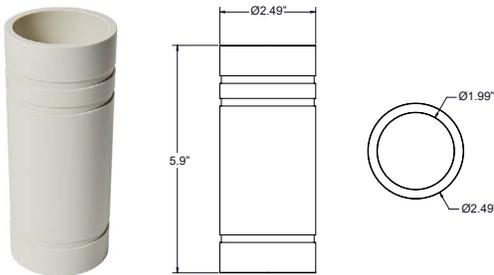


### PPMP03486

Core Drilled Application Sleeve  
 Sizes Ø2.5" x 5.9" h  
 For in-grade use

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

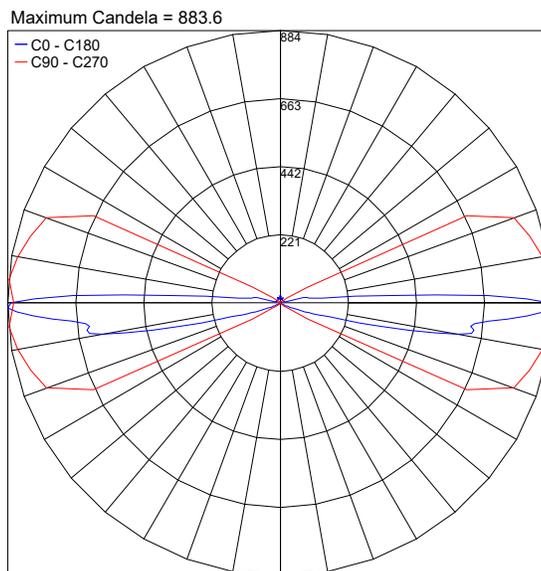

Job Name/Date:

Fixture Type Designation: