

# EASY LINE - Transparent LLRGB-RGBW4


EASY LINE is a vertical, bendable LED strip that is IP65-IP68 rated ideal for fountains or swimming pools for panel installation in reinforced concrete with tiles or pool liner. It is available in Transparent, Frost, Clear or Total Light with static white, tunable white or RGB, and guarantees protection against UV rays and the corrosive action of salt and sodium hypochlorite. EASY LINE Transparent has a transparent outercasing. **Not cuttable in the field.**



## TECHNICAL DATA

<b>Wattage</b>	15.5W / 3.28 ft (1 m) - RGB 18W / 3.28 ft (1 m) - RGBW (Consult Factory for Power)
<b>Power Supply</b>	Remote Fountain/Pool Approved 24VDC Power Supply, not included. See page 2.
<b>Construction</b>	Body: Transparent Resin Outercase: Transparent UV-treated PVC
<b>CCT</b>	RGB or RGBW (96 LED / 3.28')
<b>CRI</b>	80
<b>Delivered Lumens</b>	RGB: 480 lm / 3.3' (R) 80 lm, (G) 365 lm, (B) 50 lm RGBW: 850 lm / 3.3' (R) 80 lm, (G) 365 lm, (B) 50 lm, (W) 410 lm (3000K)
<b>Efficacy</b>	31.0 lm/W (RGB) 47.2 lm/W (RGBW)
<b>Optics</b>	120°
<b>Fixture Dimensions</b>	0.55" w x 0.26" h x Various Lengths
<b>Bend Radius</b>	2.36"
<b>LED Source</b>	SMD 5050
<b>LED Spacing</b>	96 LED per 3.28 ft (1 m), 0.33" between LEDs
<b>Lumen Maintenance</b>	L80,B10>50,000 hrs
<b>Color Consistency</b>	2-3-Step MacAdam
<b>Operating Temp.</b>	-22°F to 131°F
<b>IP Rating</b>	IP68

Fixture Dimensions



**NOT CUTTABLE IN THE FIELD**  
**MUST USE SUITABLE APPROVED FOUNTAIN & SWIMMING POOL POWER SUPPLY WHICH IS REMOTELY MOUNTED**

## ORDERING INFORMATION

Example: LLRGB4E-24.68.T.X.US Power Supplies / Accessories ordered separately.

	-	24	.	68	.	T	.	X	.	US
<b>Model No.</b>		<b>Power</b>		<b>IP Rating</b>				<b>Cable Exit</b>		
LLRGB4E - 96 LED / 3.28' (1 m)		24 - 24VDC		68 - IP68		T - Transparent		X - End Feed		US
<div style="border: 1px solid red; padding: 5px; display: inline-block;"> <p><b>NOTE:</b> Available in lengths up to 75 feet. Please specify length when ordering.</p> </div>										
LLRGB4WE-W (RGBW = 3000K)										
LLRGB4WE-N (RGBW = 4000K)										

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC - **TO BE USED WITH FOUNTAIN / SWIMMING POOLS**

Part Number	Description	Input/Output	# of Fixtures
<a href="#">FPV-100EL0024</a>	DMX/RDM(Field Addressable)/Dali, 4 Channels	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-5

## SUGGESTED POWER SUPPLIES


24VDC - **TO BE USE FOR INDOOR/OUTDOOR USE - NOT Fountain / Swimming Pool**

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00288-P24</a>	DMX/RDM(Field Addressable)/Dali, 4 Channels	120-277VAC to 24VDC, 100W, Class 2, DRY	1-5

For other power supply options consult factory.


## ACCESSORIES

Installation / Mounting for 0.55x0.26 inch

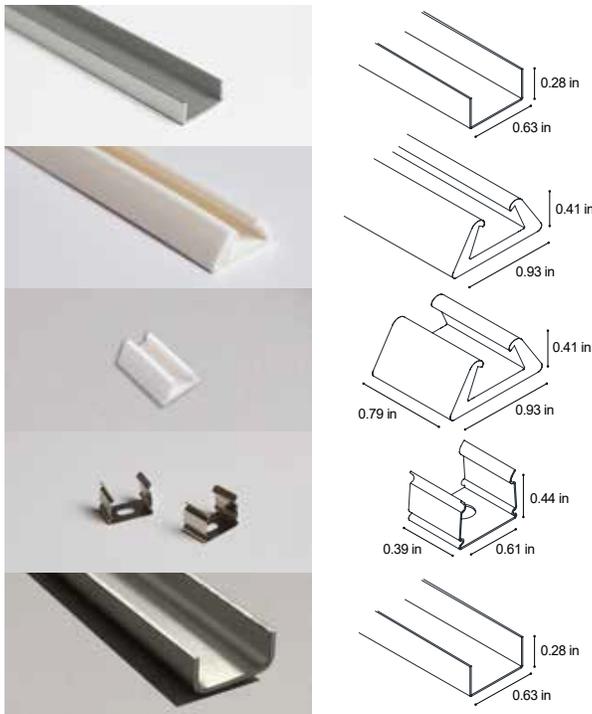

Code	Finishing	Description
<b>PRO-AL-14x6.5-AL</b>	Aluminum	Rigid guide L max 9.84 ft
<b>OUT-S-14x6.5.W</b>	White	Silicone profile
<b>CLIP-S-14x6.5.W</b>	White	Silicone clip
<b>CLIP-AC-14x6.5-AC</b>	AISI 304 harmonic steel	Steel clip
<b>PRO-AC-14x6.5-AC</b>	AISI 316 harmonic steel	Rigid guide L max 8.20 ft

## POWER CABLE EXIT / AREA WITH REDUCED LIGHT

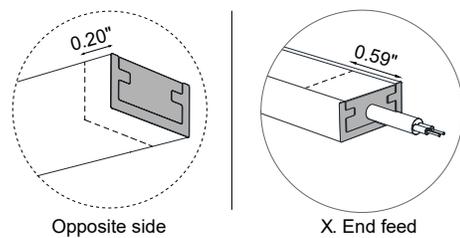

Job Name/Date:

Fixture Type Designation: