

MUSE TURN BOX SPOT 03


MUSE is a modular outdoor lamp system that offers multiple lighting solutions based on the needs of the user, by combining one of the 3 emission sources - CAPSULE, STILLA and SPOT - with various installation accessories. MUSE TURN BOX SPOT 03 is a surface mounted fixture on a black aluminum base with an adjustable head - 180° on the horizontal, 360° on the vertical. It is available in 2 color temperatures, 3 optics options, and with or without honeycomb filter.



TECHNICAL DATA

Wattage / Input	5.8W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Aluminum Lens: Transparent Tempered Glass
CCT	2700K, 3000K
CRI	>80
BUG Rating	B1-U0-G0 (10°, 2700K - no honeycomb, 26°) B0-U0-G0 (52°, 2700K - with/without honeycomb)
Delivered Lumens	234 lm (36°, 3000K, no honeycomb) 78 lm (36°, 3000K, with honeycomb)
Efficacy	40.4 lm/W (36°, 3000K, no honeycomb)
Optics	18°, 36°, 52°
Finishes	Black
Fixture Dimensions	Head: Ø2.0" x 4.1" Base: 3.2" w x 5.9" h x 1.2" depth
IP Rating	IP65
Impact Resistance	IK07

Fixture Dimensions

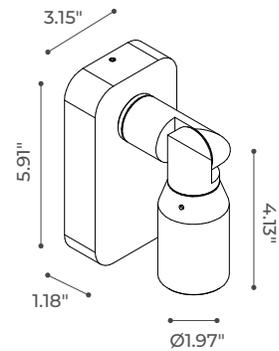

ORDERING INFORMATION

Example: D9020111611.US. Power supplies ordered separately.

D9020			11	US
Model No.	CCT	Optic / Optical Accessory	Finish	
D9020	31 - 2700K 11 - 3000K	107 - 10°, with honeycomb 108 - 10°, without honeycomb 15 - 26°, with honeycomb 16 - 26°, without honeycomb 17 - 52°, with honeycomb 18 - 52°, without honeycomb	11 - Black	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00567	Non-Dim	120-277VAC to 24VDC, 36W, Class 2, IP67	1-4
PPLT00543	0-10V Dimming (to 15%) (-40°C / -40°F cold start)	120-277VAC to 24VDC, 100W, Class 2	1-13

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-13

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-13

For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note: All Photometry is 2700K

WITH HONEYCOMB


Maximum Candela = 1347.2

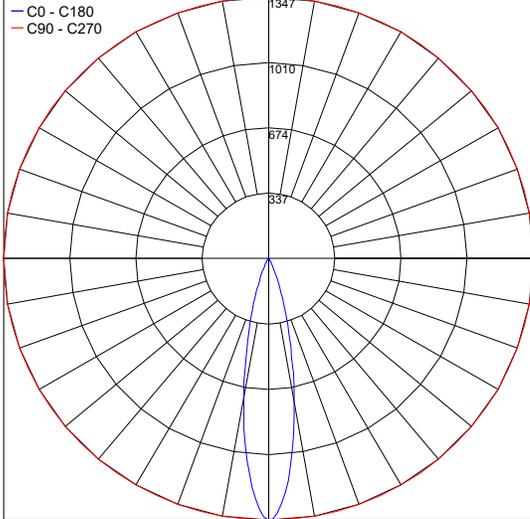

PHOTOMETRIC FILENAME : MUSE-TURN-BOX-SPOT-03-2700K-26°-WITH-HONEYCOMB.IES


WITHOUT HONEYCOMB

Maximum Candela = 1481.4

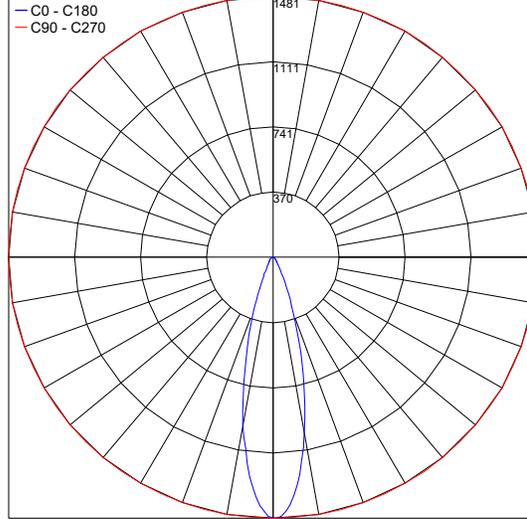


PHOTOMETRIC FILENAME : MUSE-TURN-BOX-SPOT-03-2700K-26°-NO-HONEYCOMB.IES

Maximum Candela = 293.1

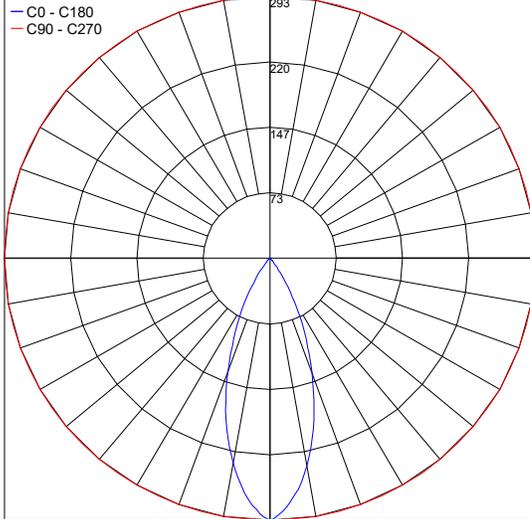

PHOTOMETRIC FILENAME : MUSE-TURN-BOX-SPOT-03-2700K-52°-WITH-HONEYCOMB.IES

Maximum Candela = 350.5

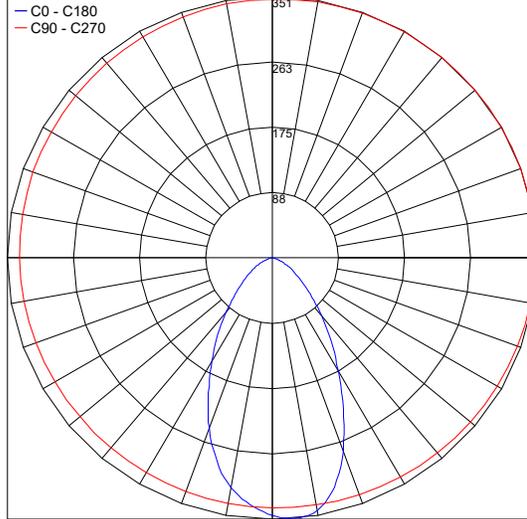

PHOTOMETRIC FILENAME : MUSE-TURN-BOX-SPOT-03-2700K-52°-NO-HONEYCOMB.IES

Job Name/Date:

Fixture Type Designation: