


BOA CEILING TRIMLESS


Boa Ceiling Trimless is a stylish, rectangular, recessed downlight that is suitable for indoor installation in a variety of contemporary settings where a powerful and clearly defined light beam is required. It is available in 2 color temperatures and 2 standard finishes.

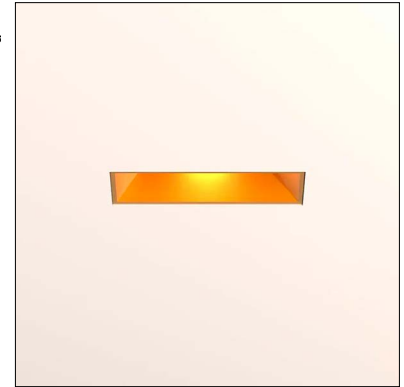

TECHNICAL DATA

Wattage	7W
Power Supply	Remote 700mA, not included. See page 2
Construction	—
CCT	2700K, 3000K (4000K on request)
CRI	>90
Delivered Lumens	520 lm (3000K)
Efficacy	86.7 lm/W (3000K)
Optics	—
Finishes	2 Standard, see below
Fixture Dimensions	5.63" x 1.69" x 3.15" h
Cut-out Dimensions	6.89" x 2.95"
Fixture Weight	0.35 lbs
LED Source	CITIZEN WW
Lumen Maintenance	50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
IP Rating	IP20

Fixture Dimensions

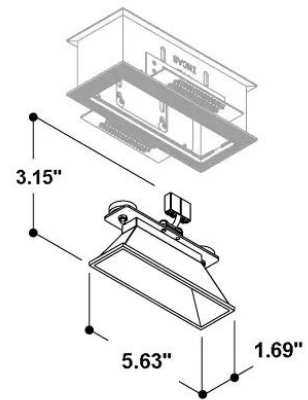

ORDERING INFORMATION

Example: T405146. Power Supplies / Accessories ordered separately.

--

Model No.	Description
T405167	2700K, Textured White
T405146	2700K, Anodized Gold
T405157	3000K, Textured White
T405136	3000K, Anodized Gold

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA




Part Number	Description	Input/Output	# of Fixtures
PPLT00498	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-2
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	3-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-5

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00515	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W, Class 2	2-2
PPLT00635	PEQOE	PEQ0	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120/277VAC to 700mA, 20W, Class 2	2-2

For other power supply options consult factory.

ACCESSORIES - Installation

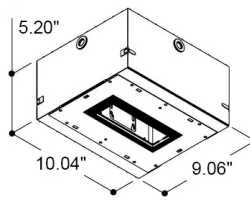

T701117 - REQUIRED

Frame for Plaster

6.89" l x 2.83" w x 2.76" h


Cut-out: 6.89" x 2.95" x 3.15" h

T701177 - Optional

Frame + Box for Plaster

10.04" l x 9.06" w x 5.20" h

Cut-out: 10.04" x 9.06" x 5.12" h



T701187 - Optional

Frame for Plastered Concrete Slabs

9.84" l x 6.89" w x 2.56" h

Cut-out: 2x 5.94" - Center 3.54"


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: Photometry is 2700K

Maximum Candela = 64.4

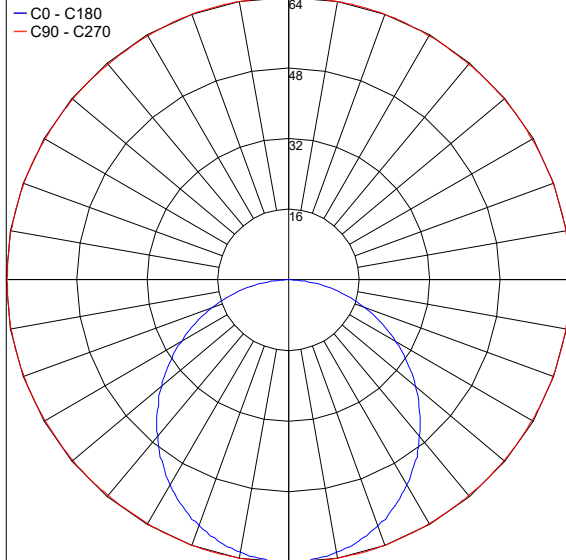

PHOTOMETRIC FILENAME : BOA CEILING TRIMLESS 6W 2700K.IES

Job Name/Date:

Fixture Type Designation: