

# BOA WALL SINGLE


Boa Wall Single is a rectangular, single beam, wall mounted light that is suitable for indoor installation in a variety of contemporary settings where a powerful and clearly defined light beam is required. It is available in 2 color temperatures and 4 standard finish combinations.



## TECHNICAL DATA

<b>Wattage</b>	7W
<b>Power Supply</b>	Remote 700mA, not included. See page 2
<b>Construction</b>	—
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	460 lm (3000K)
<b>Efficacy</b>	81 lm/W (3000K)
<b>Optics</b>	—
<b>Finishes</b>	4 Standard Combinations, see below
<b>Fixture Dimensions</b>	5.91" l x 3.15" w x 3.94" h
<b>Fixture Weight</b>	1.76 lbs
<b>LED Source</b>	CITIZEN WW
<b>Lumen Maintenance</b>	50,000 hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP20

Fixture Dimensions

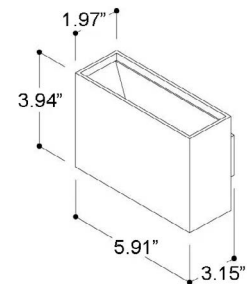

Direction of beam based on installation

## ORDERING INFORMATION

Example: T433992. Power Supplies ordered separately.

Model No.	Description
T405926	2700K, Textured Black + Gold Anodized
T405995	2700K, Textured Black + Textured White
T405992	2700K, Textured White + Gold Anodized
T405947	2700K, Textured White + Textured White
T405916	3000K, Textured Black + Gold Anodized
T405985	3000K, Textured Black + Textured White
T405992	3000K, Textured White + Gold Anodized
T405937	3000K, Textured White + Textured White

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00498</a>	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1-2
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-2
<a href="#">PPLT00261</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	3-4
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-5

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00515</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W, Class 2	2-2
<a href="#">PPLT00635</a>	PEQ0E	PEQ0	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120/277VAC to 700mA, 20W, Class 2	2-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: Photometry is 2700K

Maximum Candela = 173.3

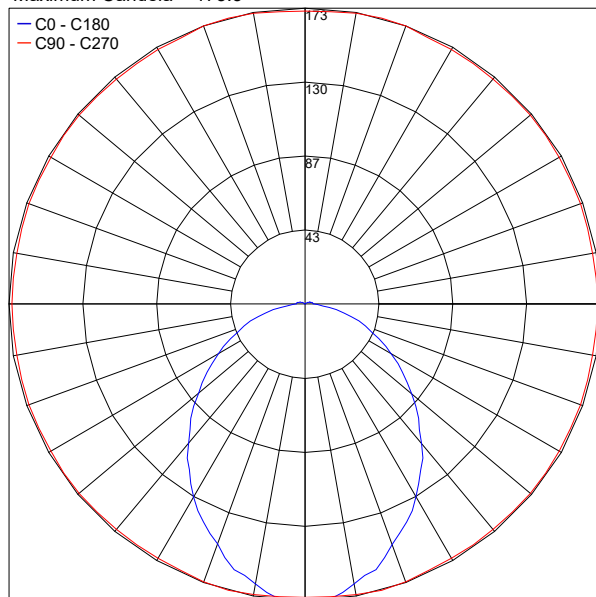

PHOTOMETRIC FILENAME : BOA WALL SINGLE BEAM 6W 2700K.IES

Job Name/Date:

Fixture Type Designation: