


DoReMi S is a collection of decorative stainless steel outdoor pendants that become luminous accents for beneath porticoes and verandas, along terraces and pergolas, or among garden trees, where the lights appear to float between the branches. Do S 2 is a sphere version with a hood on the top half of the sphere, offered in 4 color temperatures with diffuse optics and 5 standard finishes.



TECHNICAL DATA

Wattage	0.9W
Power Supply	Remote 24VDC, not included. See page 3.
Construction	Body / Bracket: Stainless Steel AISI 316L Lens: Acrylic (PMMA) Cable Length: 4.92' Standard
CCT	2200K, 2700K, 3000K, 4000K
CRI	80
BUG Rating	B0-U2-G0 (3000K)
Delivered Lumens	89 lm (3000K)
Efficacy	98.9 lm/W (3000K)
Optics	Diffuse
Finishes	5 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø1.8" x 4.9', 16.4' or 32.8' cable
Fixture Weight	0.37 lbs
LED Source	8 Mid-Power LED Matrix
Lumen Maintenance	72,000 hrs L80, B10 (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
Impact Resistance	IK06

Fixture Dimensions

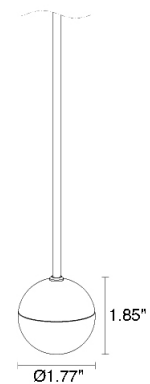

ORDERING INFORMATION

Example: DD2S00000050DI or DD2S00000050DI-2. Power Supplies / Accessories ordered separately.

DD2S00	000		0D		-	
Model #	Accessories	CCT	Optics	Finish		Cable Length
DD2S00	000 - None	0N - 2200K 0F - 2700K 05 - 3000K 09 - 4000K	0D - Diffuse	H - Anthracite T - Cor-ten 5 - Jasper Green E - White I - Stainless Steel C - Custom RAL (consult factory for "C")		4.92' standard 1 - 16.40' 2 - 32.81'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	10-80
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-80

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-76

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-76

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Installation - **REQUIRED**



WDA30__

Ceiling Rose


Include one of the below finishes:

- E - White
- H - Anthracite
- T - Cor-ten
- 5 - Jasper Green
- C - Custom RAL



WDA31

Cable Clamp

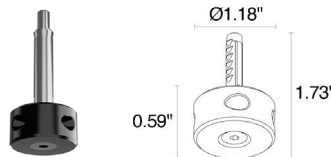


WDA32

Ceiling Cable Clamp

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 15.6

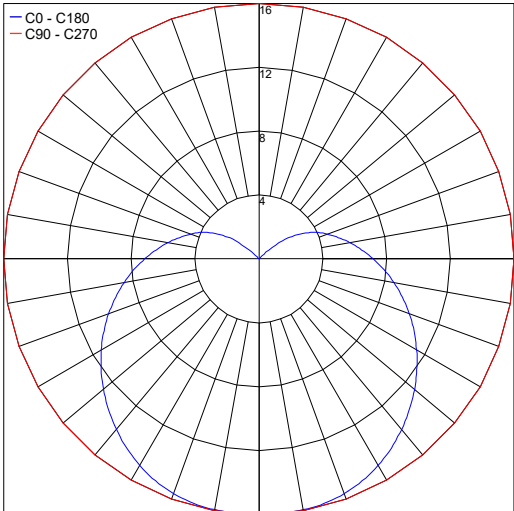

PHOTOMETRIC FILENAME : DO_S.2_3000K_0.9W_24VDC.IES

Job Name/Date:

Fixture Type Designation: