


Micro is a miniature, surface mounted luminaire that can be installed on ceilings or walls. It is 1.5 inches in diameter, and available in 3 color temperatures, 5 optics options that can be changed in the field and 4 standard finishes.

TECHNICAL DATA

Wattage	4W
Power Supply	Remote 220mA, not included. See page 2
Construction	Body: Aluminum Lens: Glass
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	447 lm (3000K, 15°) 588 lm (3000K, 36°) 562 lm (3000K, 10°x90°)
Efficacy	63.9 lm/W (3000K, 15°) 84.0 lm/W (3000K, 36°) 80.3 lm/W (3000K, 10°x90°)
Optics	15°, 24°, 36°, 15°x60°, 15°x90°
LED Source	BRIDGELUX GEN8 COB LED
Finishes	White, Black, Black Anodized, Silver Anodized, Custom RAL on request
Fixture Dimensions	Ø1.54" x 2.15" h
IP Rating	IP20



Fixture Dimensions

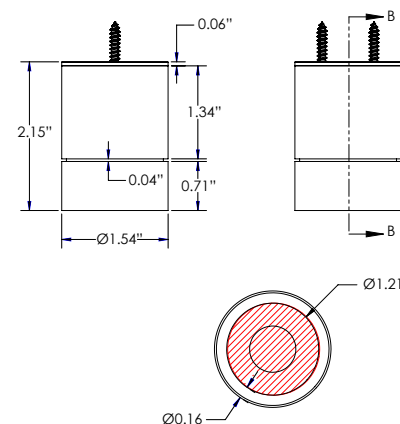

ORDERING INFORMATION

Example: MIC-L-30-96-25-H-R-0. Power Supplies ordered separately.

MIC-L	-		-		-		R	-	0
Model #	CCT	Finish	Optics	Lens	Dimming / Driver	Options			
MIC-L	27 - 2700K 30 - 3000K 40 - 4000K	11 - White 02 - Black 97 - Black Anodized TG - Titanium Grey C - Custom RAL	15 - 15° 24 - 24° 36 - 36° 60 - 15°x60° 90 - 15°x90°	H - Clear w/ Honeycomb C - Clear L - Linear	R - Remote Driver (Static White, Dim to Warm, RGBW)	0 - None			

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

Static White - 220mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 220mA, 50W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 50W, Class 2, DAMP	1-2


*For other power supply options consult factory.***PHOTOMETRIC DATA***Note: Photometry is 3000K*

Maximum Candela = 5580.2

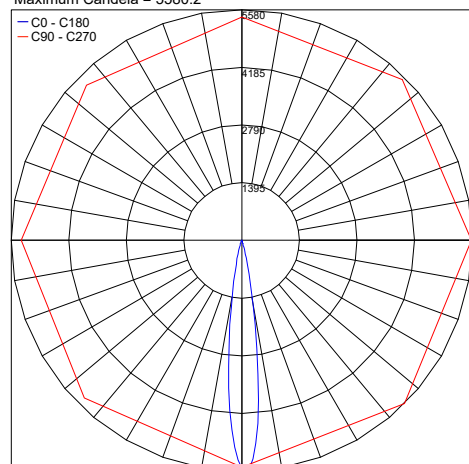


PHOTOMETRIC FILENAME : DP-MICRO-7W-C9-3000K-15°.IES

Maximum Candela = 4029

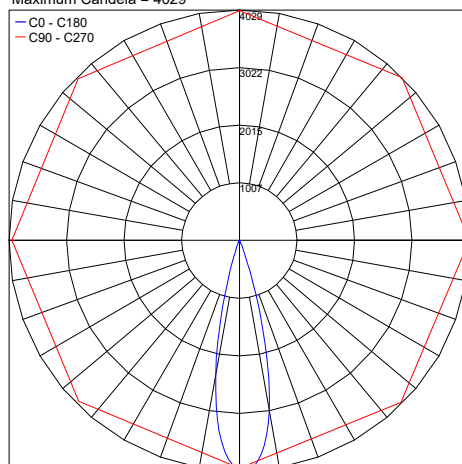


PHOTOMETRIC FILENAME : DP-MICRO-7W-C9-3000K-24°.IES

Maximum Candela = 2571

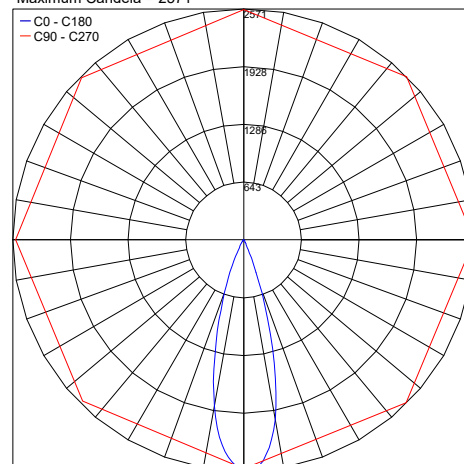


PHOTOMETRIC FILENAME : DP-MICRO-7W-C9-3000K-36°.IES

Maximum Candela = 1310

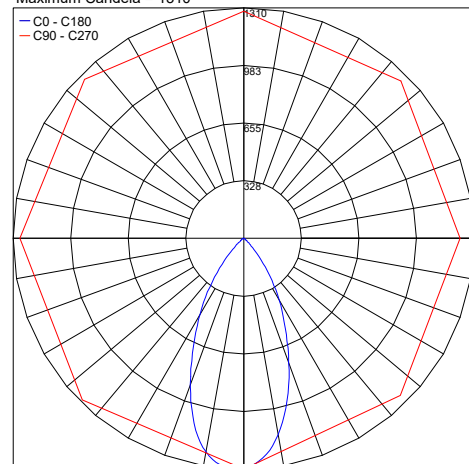

PHOTOMETRIC FILENAME : DP-MICRO-7W-C9-3000K-10°X60°.IES

Maximum Candela = 1345.8

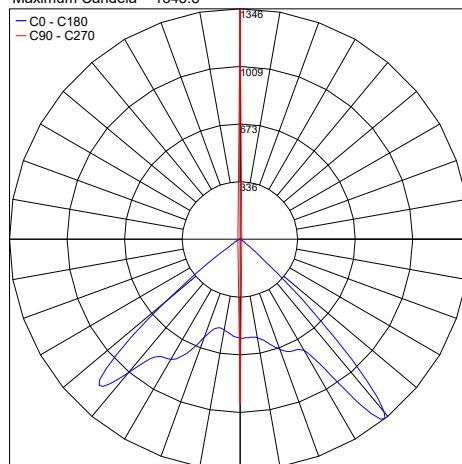

PHOTOMETRIC FILENAME : DP-MICRO-7W-C9-3000K-10°X90°.IES

Job Name/Date:

Fixture Type Designation: