


DoReMi S is a collection of decorative stainless steel outdoor pendants that become luminous accents for beneath porticoes and verandas, along terraces and pergolas, or among garden trees, where the lights appear to float between the branches. Re S 1 is the version with a suspended hemisphere head, offered in 4 color temperatures with diffuse optics and 5 standard finishes.



## TECHNICAL DATA

<b>Wattage</b>	0.9W
<b>Power Supply</b>	Remote 24VDC, not included. See page 3.
<b>Construction</b>	Body / Bracket: Stainless Steel AISI 316L Lens: Acrylic (PMMA) Cable Length: 4.92' Standard
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>CRI</b>	80
<b>BUG Rating</b>	B0-U3-G0 (3000K)
<b>Delivered Lumens</b>	75 lm (3000K)
<b>Efficacy</b>	83.3 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	5 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
<b>Fixture Dimensions</b>	Ø1.8" x 1.0" h x 4.9', 16.4' or 32.8' cable
<b>Fixture Weight</b>	0.33 lbs
<b>LED Source</b>	8 Mid-Power LED Matrix
<b>Lumen Maintenance</b>	72,000 hrs L80, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +122°F
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK06

Fixture Dimensions

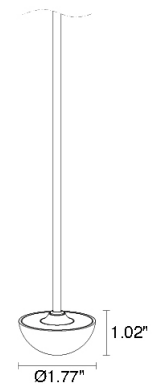

## ORDERING INFORMATION

Example: RR1S0000050DI or RR1S0000050DI-2. Power Supplies / Accessories ordered separately.

RR1S00	000		0D		-	
Model #	Accessories	CCT	Optics	Finish		Cable Length
RR1S00	000 - None	0N - 2200K 0F - 2700K 05 - 3000K 09 - 4000K	0D - Diffuse	H - Anthracite T - Cor-ten 5 - Jasper Green E - White I - Stainless Steel C - Custom RAL (consult factory for "C")		4.92' standard 1 - 16.40' 2 - 32.81'

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	10-80
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-80

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-76

## DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-76

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

Installation - **REQUIRED**



### WDA30\_\_

Ceiling Rose


Include one of the below finishes:

- E - White
- H - Anthracite
- T - Cor-ten
- 5 - Jasper Green
- C - Custom RAL



### WDA31

Cable Clamp

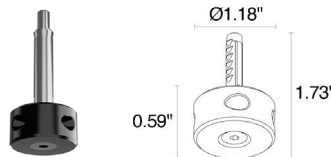


### WDA32

Ceiling Cable Clamp

## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 27.9

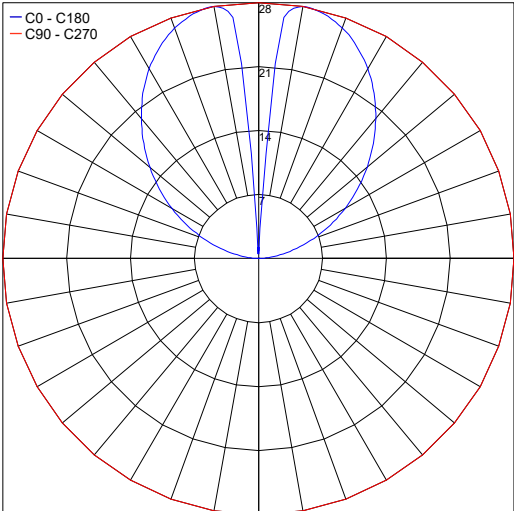

PHOTOMETRIC FILENAME : RE\_S.1\_3000K\_0.9W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: