
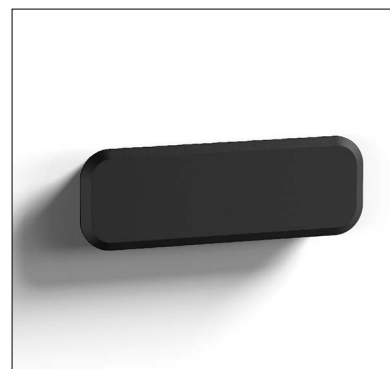


BRICK SMOOTH

Brick Smooth is a sleek and versatile, rectangular, outdoor, wall mounted luminaire with rounded edges that provides up and down light emission. It is available in 2 lengths (7.7" or 11.6"), 3 color temperatures, and 2 standard metallic finishes as well as a primer finish that can be painted any color, and 2 Cementolight® textured concrete finishes.

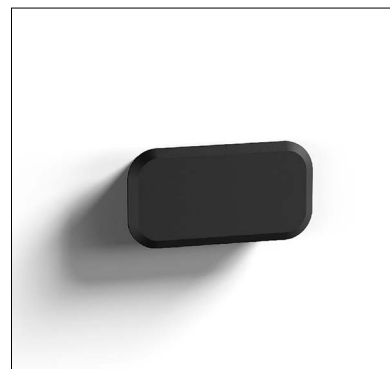

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	6W, 12W
Power Supply	Remote 350mA, not included. See page 2.
Construction	Inner Body: Die-Cast Aluminum Lens: Extra-Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U3-G0 (3000K, 6W version) B1-U4-G0 (3000K, 12W version)
CRI	90
Delivered Lumens	634 lm (6W, 3000K) 1686 lm (12W, 3000K)
Efficacy	105.7 lm/W (6W, 3000K) 140.5 lm/W (12W, 3000K)
Optics	Diffused
Finishes	Anthracite, Pure White (RAL 9010), Paintable Primer, Cementolight® Warm Grey and Sage Green
Lumen Maintenance	55,000 hrs (Ta 35°C)
Fixture Dimensions	7.68" l x 3.94" w x 1.61" d (small) 11.61" l x 3.94" w x 1.61" d (large)
IP Rating	IP65
Impact Resistance	IK08

ORDERING INFORMATION


Example: F33301.1.2.05.US. Accessories ordered separately.

			05	.US
Model No.	Finish	CCT	Optics	
F33301 - 6W, 7.7" length	1 - Anthracite	2 - 2700K	05 - Diffused	.US
F33302 - 14W, 11.6" length	2 - Pure White (RAL 9010)	3 - 3000K		
	U - Primer - Paintable	4 - 4000K		
	S - Cementolight® Warm Gray			
	T - Cementolight® Sage Green			


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

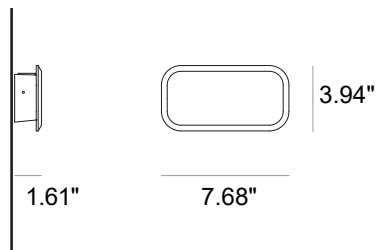

F33301 (6W)

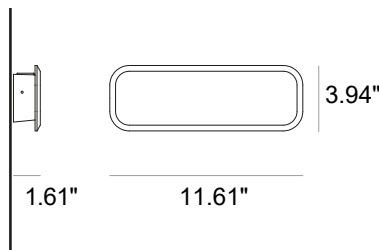

F33302 (12W)

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures	
			6W	12W
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-3	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2	1-1

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						6W	12W
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1	—
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2	1-1

For other power supply options consult factory.

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 122.3

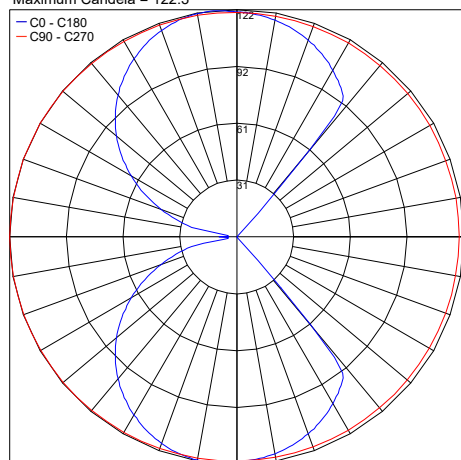

PHOTOMETRIC FILENAME : BRICK SMOOTH 5.6W 30K - 33301.X.3.05.IES

Maximum Candela = 323.0

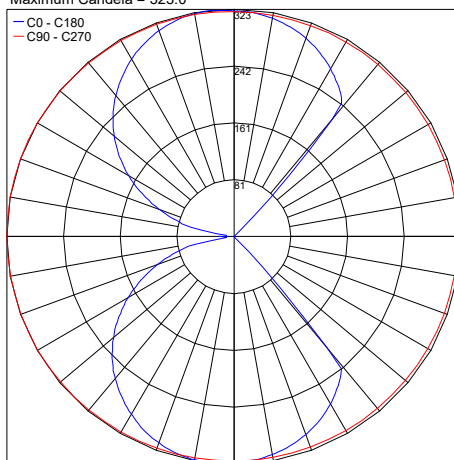

PHOTOMETRIC FILENAME : BRICK SMOOTH 14W 30K - 33302.X.3.05.IES

Job Name/Date:

Fixture Type Designation: