

BRICK SMOOTH





Brick Smooth, the perfect link of form and functionality.


The Brick Smooth collection is the go-to choice for those seeking a versatile and elegant solution for outdoor lighting. With its contemporary design and rounded shapes, Brick Smooth seamlessly adapts to any architectural setting, creating a unique and welcoming atmosphere. The collection offers high levels of customization to meet individual style and functionality preferences.



Paintable finish with primer on




Matte Primer only version with the addition of a gripping paint - not included in the supply - the product can be then painted the same color of the wall on which it is installed. Ideal for projects in which light alone must be the protagonist!

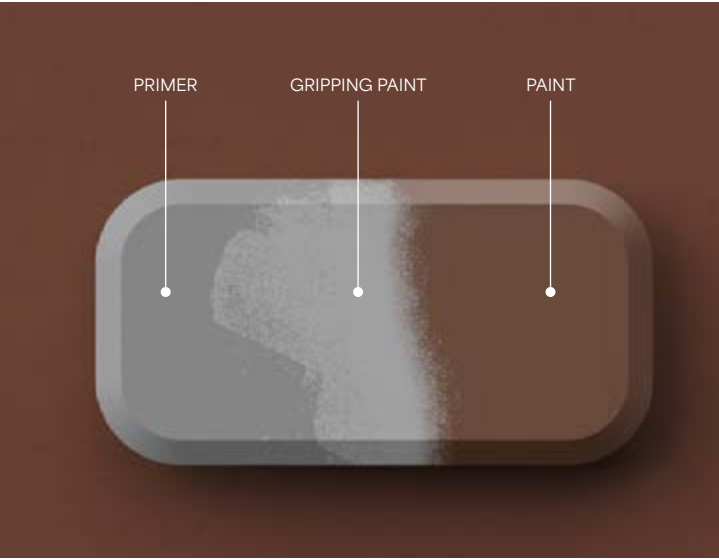

Metal Finishes



Metal finishes
Anthracite
Pure White RAL9010

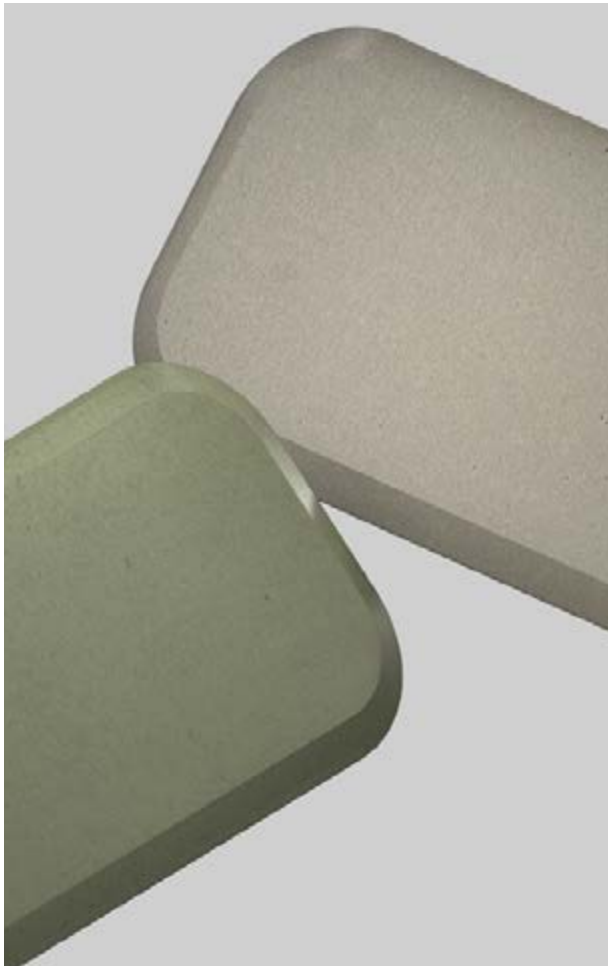

Cementolight®



The versatility of the Smooth collection extends to its availability in a unique variant: concrete, 30% made of recycled material. In addition to the traditional metallic options, this collection offers concrete in two color variations, gray and sage green, adding a distinctive and contemporary touch to any outdoor space. With its textured finish, concrete brings robustness and elegance to the Smooth collection, providing a unique solution for outdoor lighting.

Concrete finishes
Cementolight® warm grey
Cementolight® sage green

Applique

Wall



Performance data

Power	6W
Output lumen 3000K	634
Output lumen 4000K	679
L90 lifetime Ta35°C(HRS)	55.000 hrs



12W
1686
1805
55.000 hrs

Build data

Voltage	350mA 50-60Hz
Power supply	Remote, not included
External cable	Single input 3-poles (not furnished)
Protection rating	IP65

350mA 50-60Hz
Remote, not included
Single input 3-poles (not furnished)
IP65

Dimensions

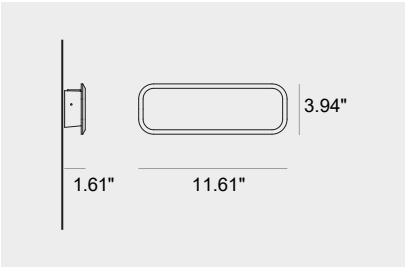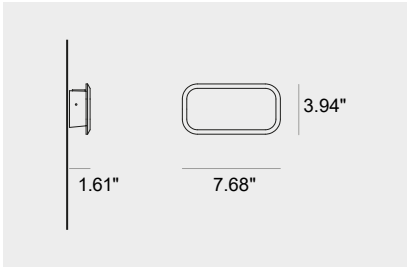

● Finish	_1	● Anthracite
	_2	● Pure White (RAL9010)
	_U	🔧 Primer paintable
	_S	● Cementolight® warm grey
	_T	● Cementolight® sage green
■ CCT	_2	2700°K - CRI 90
	_3	3000°K - CRI 90
	_4	4000°K - CRI 90
▲ Beam	_05	Diffused
Code composition	33301	● ■ ▲

_N	 Anthracite
_O	 Pure White (RAL9010)
_U	 Primer paintable
_S	 Cementolight® warm grey
_T	 Cementolight® sage green
_2	2700°K - CRI 90
_3	3000°K - CRI 90
_4	4000°K - CRI 90
_05	Diffused
33302	


Technical data

APPLIQUE

Ground distance 8.2 ft

MIDPOWER

6W



3000k - 634 lm - 113 lm/w


4000k - 679 lm - 121 lm/w

APPLIQUE

Ground distance 8.2 ft

MIDPOWER

14W



3000k - 1682 lm - 120 lm/w

4000k - 1805 lm - 129 lm/w



FRANCESCONI

designplan® 

Graphic design and Art direction
OSMO Design Studio

© Francesconi 2023 tutti i diritti riservati