

BRICK SMOOTH





Brick Smooth, the perfect link of form and functionality.


The Brick Smooth collection is the go-to choice for those seeking a versatile and elegant solution for outdoor lighting. With its contemporary design and rounded shapes, Brick Smooth seamlessly adapts to any architectural setting, creating a unique and welcoming atmosphere. The collection offers high levels of customization to meet individual style and functionality preferences.



Paintable finish with primer on



Matte Primer only version with the addition of a gripping paint - not included in the supply - the product can be then painted the same color of the wall on which it is installed. Ideal for projects in which light alone must be the protagonist!

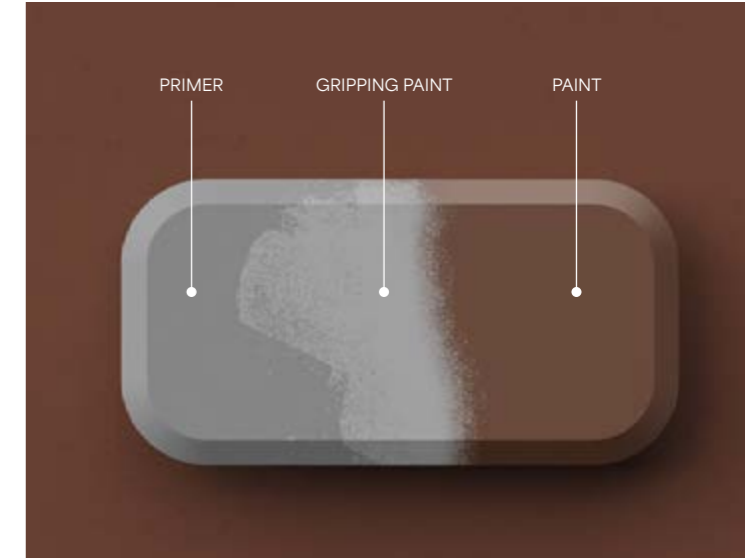


Cementolight®



The versatility of the Smooth collection extends to its availability in a unique variant: concrete, 30% made of recycled material. In addition to the traditional metallic options, this collection offers concrete in two color variations, gray and sage green, adding a distinctive and contemporary touch to any outdoor space. With its textured finish, concrete brings robustness and elegance to the Smooth collection, providing a unique solution for outdoor lighting.

Concrete finishes

- Cementolight® warm grey
- Cementolight® sage green

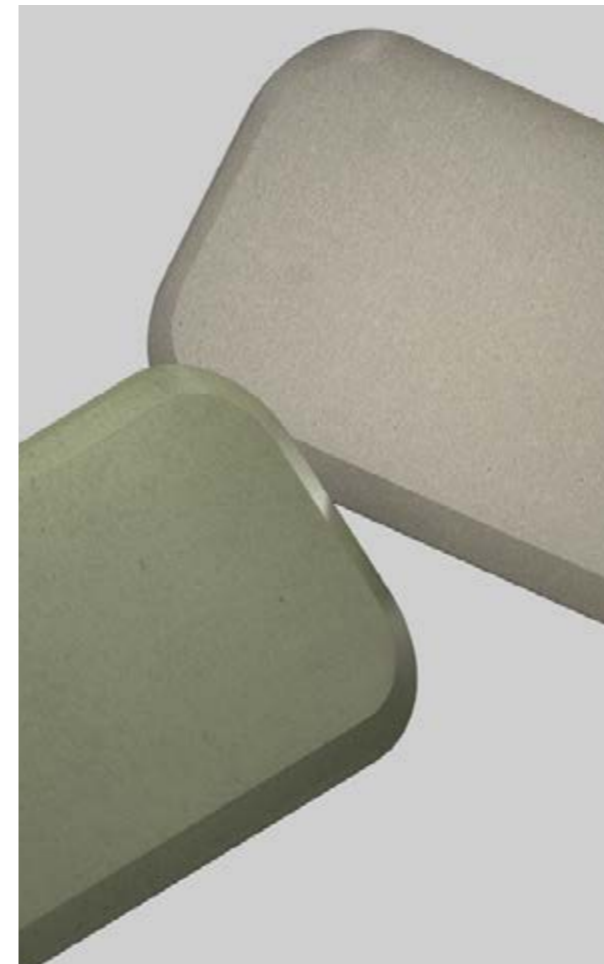

Metal Finishes



Metal finishes

- Anthracite
- Pure White RAL9010

Applique

Wall



Performance data

Power **5.6W**
 Output lumen 3000K **634**
 Output lumen 4000K **679**
 L90 lifetime **55.000 hrs**
 Ta35°C(HRS)



14.0W
 1686
 1805
 55.000 hrs

Build data

Voltage **350mA 50-60Hz**
 Power supply **Remote, not included**
 External cable **Single input 3-poles (not furnished)**
 Protection rating **IP65**

350mA 50-60Hz
 Remote, not included
 Single input 3-poles (not furnished)
 IP65

Dimensions

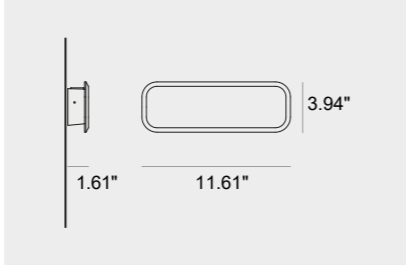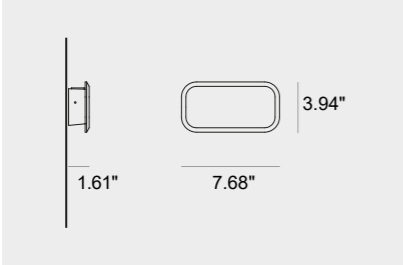

Finish

- _1 ● Anthracite
- _2 ● Pure White (RAL9010)
- _U ☞ Primer paintable
- _S ● Cementolight® warm grey
- _T ● Cementolight® sage green

- _N ● Anthracite
- _O ● Pure White (RAL9010)
- _U ☞ Primer paintable
- _S ● Cementolight® warm grey
- _T ● Cementolight® sage green

CCT

- _2 2700°K - CRI 90
- _3 3000°K - CRI 90
- _4 4000°K - CRI 90

- _2 2700°K - CRI 90
- _3 3000°K - CRI 90
- _4 4000°K - CRI 90

Beam

- _05 Diffused

- _05 Diffused

Code composition

33301

33302

Technical data

APPLIQUE

Ground distance 8.2 ft

MIDPOWER

6W




APPLIQUE


Ground distance 8.2 ft

MIDPOWER

14W



3000k - 634 lm - 113 lm/w
 4000k - 679 lm - 121 lm/w



3000k - 1682 lm - 120 lm/w
 4000k - 1805 lm - 129 lm/w



FRANCESCONI

designplan® 

Graphic design and Art direction
OSMO Design Studio

© Francesconi 2023 tutti i diritti riservati