

NEVA PRO 4 SURFACE

NEVA PRO 4.0, 4.1, 4.2

The Neva Pro 4 series are frameless linear profiles designed to enhance wall and facades with new generation optics with a variety of well-defined beams. Available in 3 different lengths with in-grade housing for recessed applications or adjustable brackets for surface mount.

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (120VAC)
Power Supply	Integral - On/Off, 0-10V or DALI-1
Construction	Body: Black Painted Anodized Aluminum Lens: Transparent or Acid-Etched Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	See Chart on page 2 for Lumens / Efficacy
LED Spacing	4.72" between
Optics	12°, 21°, 31°, 44°, 16"x48°
Finishes	Black
Fixture Dimensions / Wt.	See Chart on page 2
LED Source	See Chart on page 2
Lumen Maintenance	L90, B10 >50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66, IP67
Impact Rating	IK06



ORDERING INFORMATION

Example: NP4110020090MN or NP4110020090MN-2. Accessories ordered separately.

					N
Model No.	Control System	Optical	CCT	Optics	Finish
NP4010 - Neva Pro 4.0 (15W)	00 - On/Off	00 - none	N - 2200K	0T - 12°	N - Black
NP4110 - Neva Pro 4.1 (20W)	02 - 0-10V	01 - Honeycomb	F - 2700K	0S - 21°	
NP4210 - Neva Pro 4.2 (31W)	0D - DALI-2	04 - Micro Louver	5 - 3000K	0M - 31°	
			9 - 4000K	0L - 44°	
				0W - 16"x48°	

Job Name/Date:




Fixture Type Designation:

NEVA PRO 4 SURFACE

NEVA PRO 4.0, 4.1, 4.2

TECHNICAL DATA

	NEVA PRO 4.0	NEVA PRO 4.1	NEVA PRO 4.2
Wattage	15W	20W	31W
Delivered Lumens (3000K)	1003 lm (3000K, 31°)	1505 lm (3000K, 31°)	2510 lm (3000K, 31°)
Fixture Dim. (l,w,h)	26.65" x 1.46" x 2.91"	40.83" x 1.46" x 2.91"	69.21" x 1.46" x 2.91"
Fixture Weight	4.08 lbs	5.51 lbs	8.38 lbs
LED Source	3 high power LEDs	6 high power LEDs	9 high power LEDs

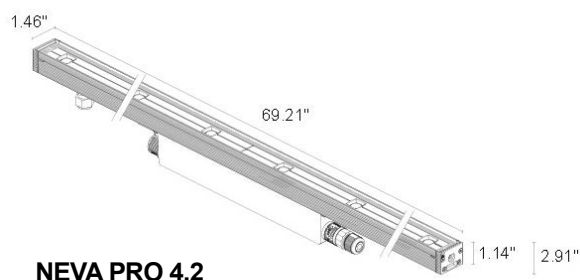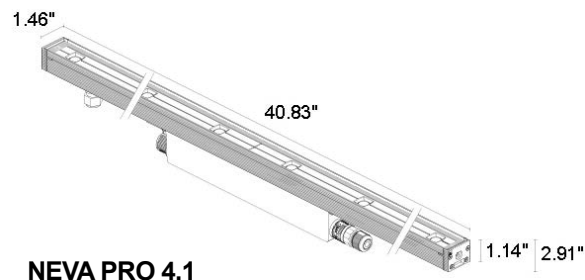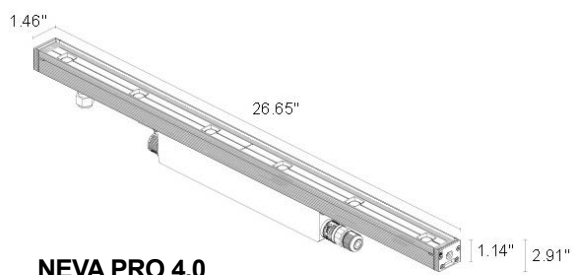

Job Name/Date:

Fixture Type Designation:

NEVA PRO 4 SURFACE

NEVA PRO 4.0, 4.1, 4.2

ACCESSORIES - Installation



WMA09N
Pair of Brackets
2.95" h




WMA10N
Pair of Brackets
5.51" h




WN6001
Fixture Anti Fall Kit
*Optional for Ceiling Installations
(and if desired Wall)*

Anti-Glare



Honeycomb Louver
Optical Accessory
Built in - Order with fixture code



Micro Louver
Optical Accessory
Built in - Order with fixture code

Wiring Materials



WFA04
3-pin male connector
for in/out connection
IP66-IP68
0.91" x 1.97"



WFA05
5-pin male connector
for in/out connection
IP68
0.91" x 1.97"

Job Name/Date:


Fixture Type Designation:

NEVA PRO 4 SURFACE


NEVA PRO 4.0, 4.1, 4.2

PHOTOMETRIC DATA


Note: All photometry is 3000K

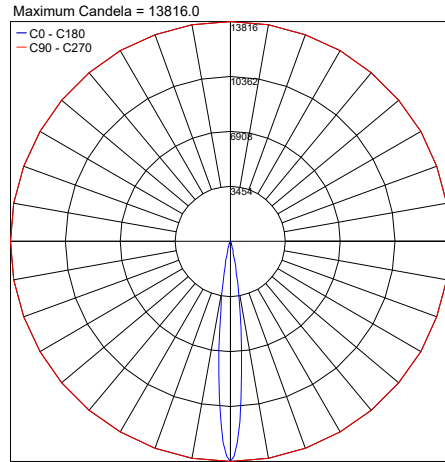


PHOTOMETRIC FILENAME : NEVA_PRO_4.0_T_12_3000K_15W.IES

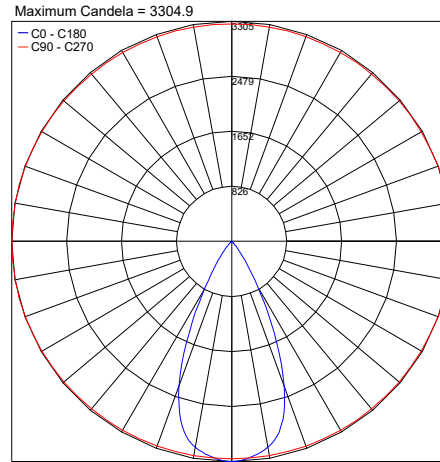


PHOTOMETRIC FILENAME : NEVA_PRO_4.0_W_16X48_3000K_15W.IES

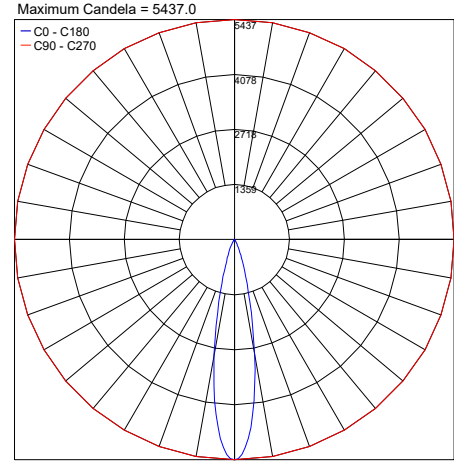


PHOTOMETRIC FILENAME : NEVA_PRO_4.0_S_21_3000K_15W.IES

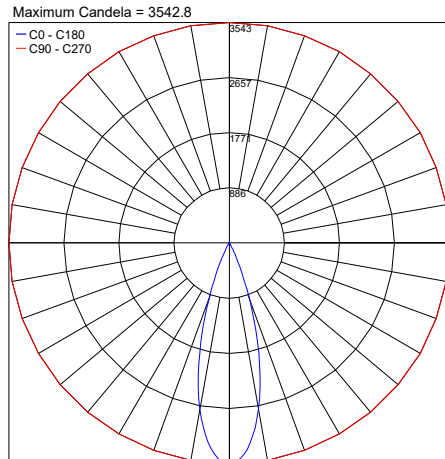


PHOTOMETRIC FILENAME : NEVA_PRO_4.0_M_31_3000K_15W.IES

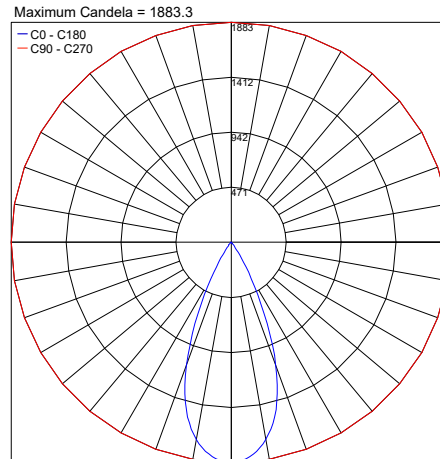


PHOTOMETRIC FILENAME : NEVA_PRO_4.0_L_44_3000K_15W.IES

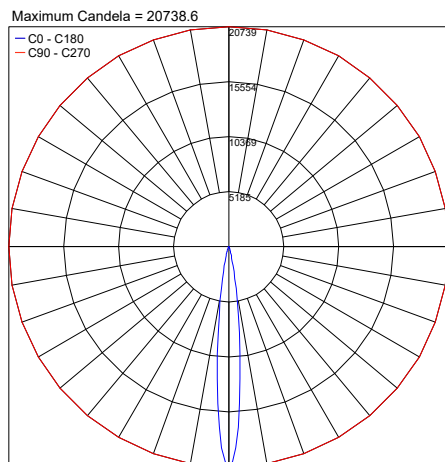

PHOTOMETRIC FILENAME : NEVA_PRO_4.1_T_12_3000K_20W.IES

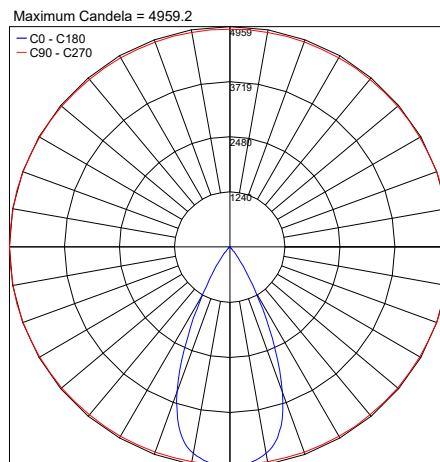

PHOTOMETRIC FILENAME : NEVA_PRO_4.1_W_16X48_3000K_20W.IES

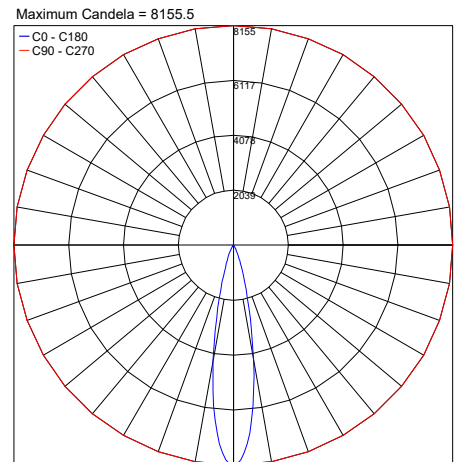

PHOTOMETRIC FILENAME : NEVA_PRO_4.1_S_21_3000K_20W.IES

Job Name/Date:

Fixture Type Designation:


NEVA PRO 4 SURFACE

NEVA PRO 4.0, 4.1, 4.2

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 5315.9

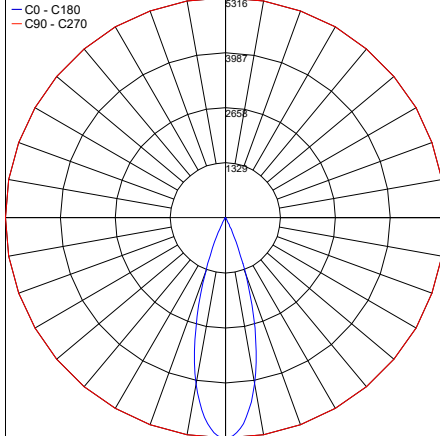


PHOTOMETRIC FILENAME : NEVA_PRO_4.1_M_31_3000K_20W.IES

Maximum Candela = 2826.9

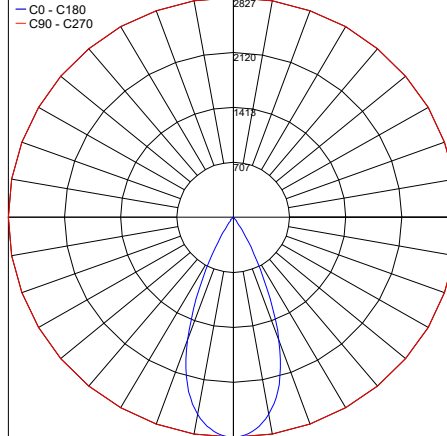


PHOTOMETRIC FILENAME : NEVA_PRO_4.1_L_44_3000K_20W.IES

Maximum Candela = 34569.1

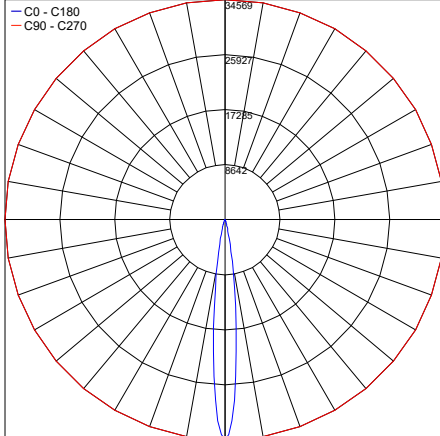


PHOTOMETRIC FILENAME : NEVA_PRO_4.2_T_12_3000K_31W.IES

Maximum Candela = 8271.4

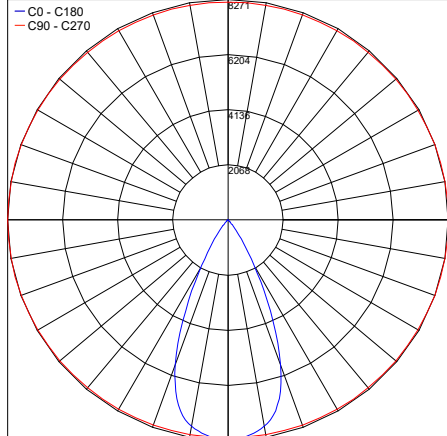


PHOTOMETRIC FILENAME : NEVA_PRO_4.2_W_16X48_3000K_31W.IES

Maximum Candela = 13603.8

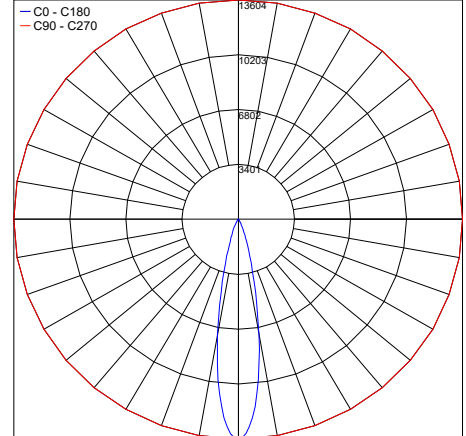


PHOTOMETRIC FILENAME : NEVA_PRO_4.2_S_21_3000K_31W.IES

Maximum Candela = 8865.8

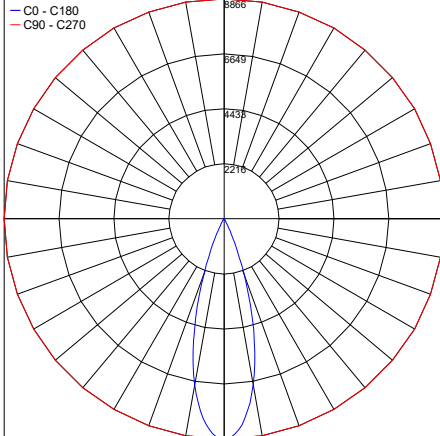

PHOTOMETRIC FILENAME : NEVA_PRO_4.2_M_31_3000K_31W.IES

Maximum Candela = 4714

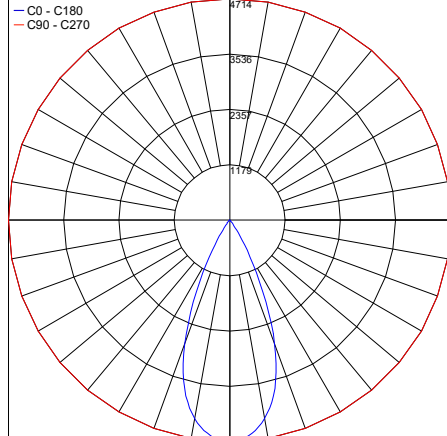

PHOTOMETRIC FILENAME : NEVA_PRO_4.2_L_44_3000K_31W.IES

Job Name/Date:

Fixture Type Designation: