

NEVA PRO 5 SURFACE

NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

The Neva Pro 5 series are frameless linear profiles designed to enhance wall and facades with new generation optics with a variety of well-defined beams. Available in tunable white light (2200K-5000K) and 4 different lengths with in-grade housing for recessed applications or adjustable brackets for surface mount.

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: Black Painted Anodized Aluminum Lens: Transparent or Acid-Etched Tempered Glass Cable Length: 4.92' standard
CCT	Tunable White: 2200K - 5000K
CRI	>80
Delivered Lumens	See Chart on page 2 for Lumens / Efficacy
LED Spacing	2.36" between
Optics	Optics: 23°, 34°, 47°, 29°x49°, Diffuse Linear: 38°x90°, Wall Washer
Finishes	Black
Fixture Dimensions / Wt.	See Chart on page 2
LED Source	See Chart on page 2
Lumen Maintenance	L90, B10 >50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66, IP67
Impact Rating	IK06



ORDERING INFORMATION

Example: NP51000001H0MN or NP51000001H0MN-2. Accessories / Power Supplies ordered separately.

		H		N	
Model No.	Optical	CCT	Optics	Finish	Cable Length
NP0500 - Neva Pro Mini 5 (14W)	0000 - none	H - 2200K-5000K	0S - 23°	N - Black	4.92' standard
NP5000 - Neva Pro 5.0 (10W)	0001 - Honeycomb		0M - 34°		1 - 16.40'
NP5100 - Neva Pro 5.1 (16W)	0004 - Micro Louver		0L - 47°		2 - 32.81'
NP5200 - Neva Pro 5.2 (26W)	NOTE: Honeycomb Louver NOT available with Diffuse or Wall Washer optics. Micro Louver ONLY available with 38°x90° and Wall Washer optics.		0W - 29°x49°		4 - 65.62'
			LW - 38°x90°		
			0D - Diffuse		
			LA - Wall Washer		
			NOTE: Wall Washer optic only available with Micro Louver		

Job Name/Date:

Fixture Type Designation:

NEVA PRO 5 SURFACE


NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

TECHNICAL DATA


	NEVA MINI PRO 5	NEVA PRO 5.0	NEVA PRO 5.1	NEVA PRO 5.2
Wattage	14W	28W	42W	71W
Delivered Lumens (3000K)	1117 lm (3500K, 34°)	2234 lm (3500K, 34°)	3351 lm (3500K, 34°)	5585 lm (3500K, 34°)
Fixture Dim. (l,w,h)	12.44" x 1.46" x 2.28"	24.25" x 1.46" x 2.28"	36.06" x 1.46" x 2.28"	59.72" x 1.46" x 2.28"
Fixture Weight	1.32 lbs	2.54 lbs	3.64 lbs	6.06 lbs
LED Source	20 power LEDs, 56 mid power LEDs	40 power LEDs, 112 mid-power LEDs	60 power LEDs, 168 mid power LEDs	100 power LEDs, 280 mid power LEDs




NEVA MINI PRO 5

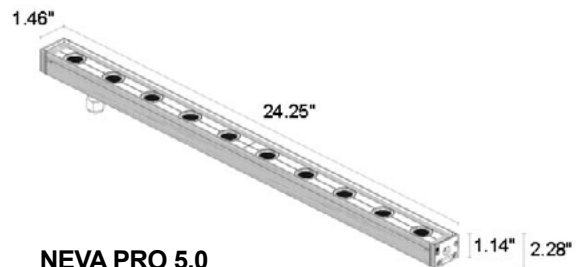

NEVA PRO 5.0

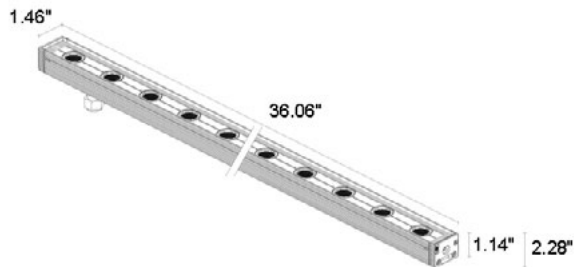

NEVA PRO 5.1

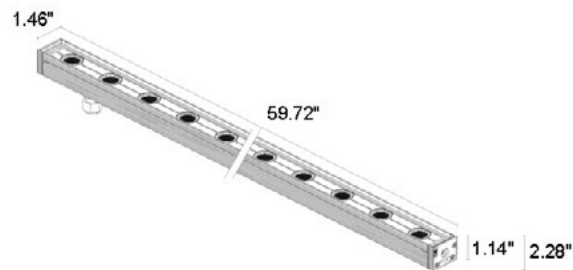

NEVA PRO 5.2

Job Name/Date:

Fixture Type Designation:

NEVA PRO 5 SURFACE

NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

SUGGESTED POWER SUPPLIES

24VDC - Tunable White

Part Number	Description	Input/Output	# of Fixtures / Power Supply			
			Neva Pro Mini 5	Neva Pro 5.0	Neva Pro 5.1	Neva Pro 5.2
			14W	28W	42W	71W
PPLT00701	Tunable White - 0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 50W, Class 2	1-2	1-1	—	—
PPLT00726	ELV / TRIAC & 0-10V to 0.1% Tunable White	120-277VAC to 24VDC, 96W, Class 2, Wet/Damp	1-5	1-2	1-1	1-1
PPLT00718	Tunable White DMX / RDM to 0.1% (2 Channels)	120-277VAC to 24VDC, 100W, Class 2	1-5	1-2	1-1	1-1

Job Name/Date:

Fixture Type Designation:

NEVA PRO 5 SURFACE

NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

ACCESSORIES - Installation



WMA09N
Pair of Brackets
2.95" h




WMA10N
Pair of Brackets
5.51" h




WN6001
Fixture Anti Fall Kit
*Optional for Ceiling Installations
(and if desired Wall)*

Anti-Glare



Honeycomb Louver
Optical Accessory
Built in - Order with fixture code



Micro Louver
Optical Accessory
Built in - Order with fixture code



Anti-Glare Shield
Stainless steel painted black
WB6500 - Neva Pro Mini 5 (12.91")
WB6520 - Neva Pro 5.0 (26.50")
WB6521 - Neva Pro 5.1 (40.67")
WB6522 - Neva Pro 5.2 (69.06")

Job Name/Date:

Fixture Type Designation:


NEVA PRO 5 SURFACE

NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 3523.3

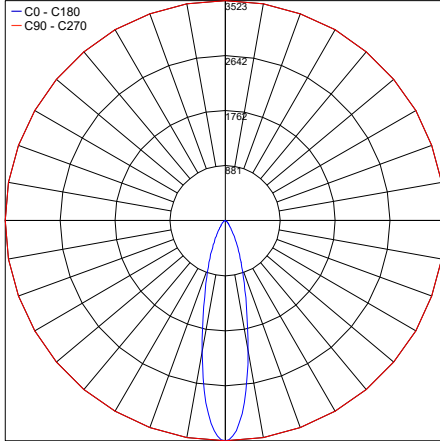


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_S_23_TW_14W_24VDC.IES

Maximum Candela = 1600.3

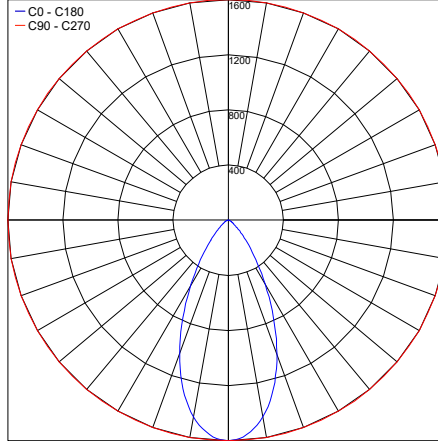


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_W_28X49_TW_14W_24VDC.IES

Maximum Candela = 2327.2

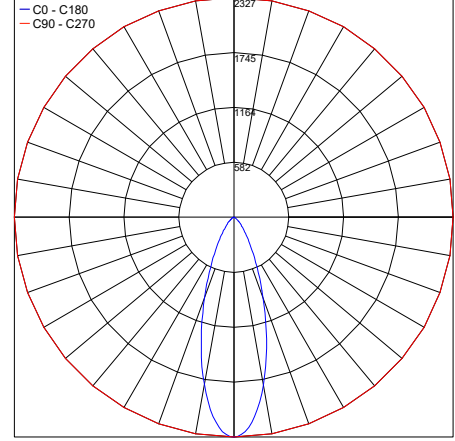


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_M_34_TW_14W_24VDC.IES

Maximum Candela = 780.4

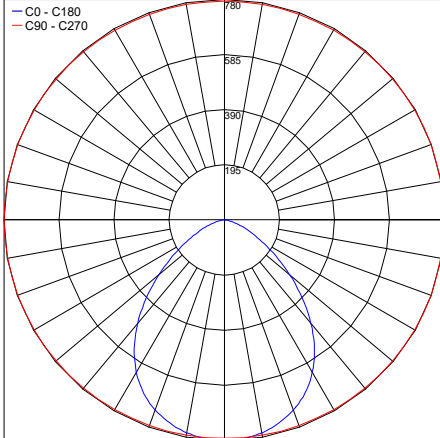


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_38X90_TW_14W_24VDC.IES

Maximum Candela = 1081.6

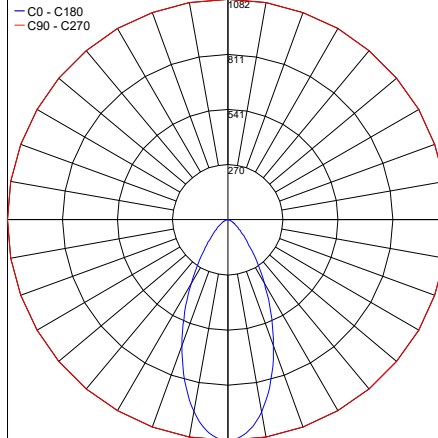


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_L_47_TW_14W_24VDC.IES

Maximum Candela = 183.7

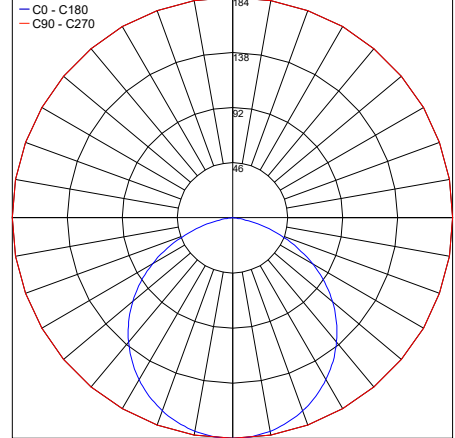

PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_DIFFUSE_TW_14W_24VDC.IES

Maximum Candela = 590.8

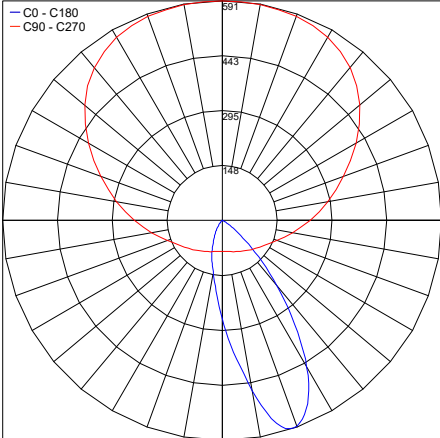

PHOTOMETRIC FILENAME : NEVA_MINI_PRO_5_WALL_WASHER_TW_14W_24VDC.IES

Job Name/Date:


Fixture Type Designation:

NEVA PRO 5 SURFACE


NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

PHOTOMETRIC DATA


Note: All photometry is 3000K

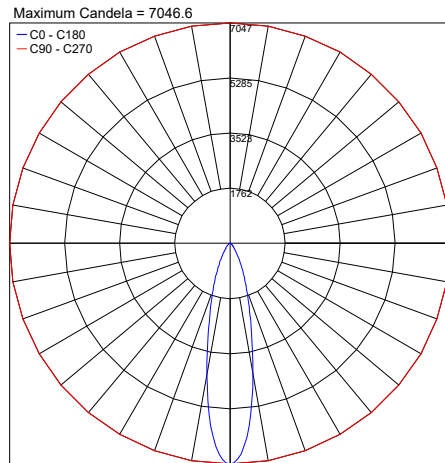


PHOTOMETRIC FILENAME : NEVA_PRO_5.0_S_23_TW_28W_24VDC.IES

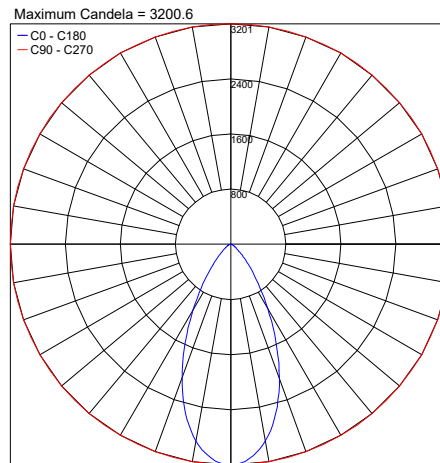


PHOTOMETRIC FILENAME : NEVA_PRO_5.0_W_29X48_TW_28W_24VDC.IES

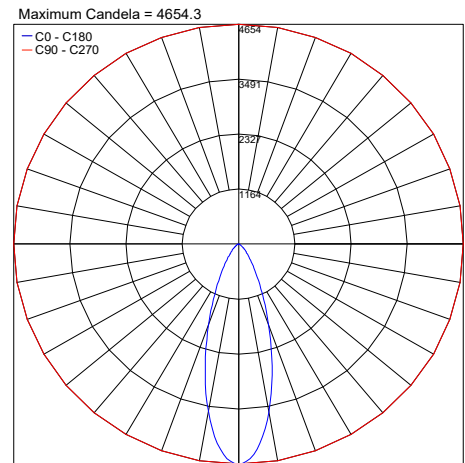


PHOTOMETRIC FILENAME : NEVA_PRO_5.0_M_34_TW_28W_24VDC.IES

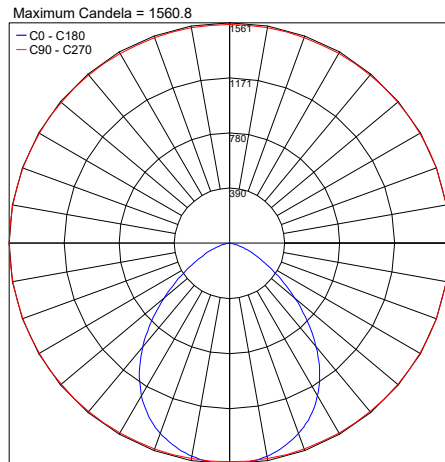


PHOTOMETRIC FILENAME : NEVA_PRO_5.0_38X90_TW_28W_24VDC.IES

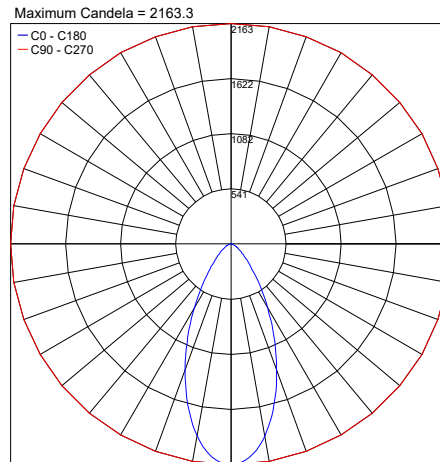

PHOTOMETRIC FILENAME : NEVA_PRO_5.0_L_47_TW_28W_24VDC.IES

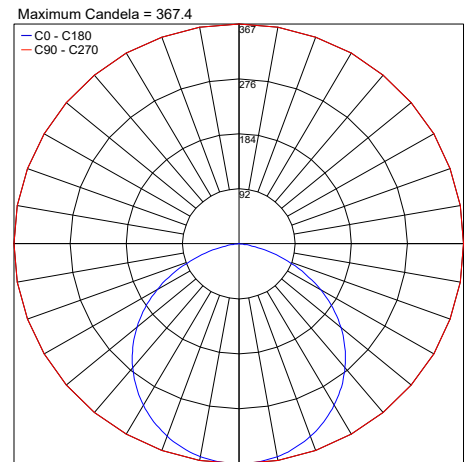

PHOTOMETRIC FILENAME : NEVA_PRO_5.0_DIFFUSE_TW_28W_24VDC.IES

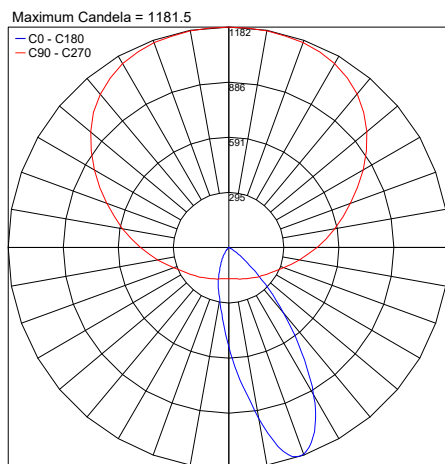

PHOTOMETRIC FILENAME : NEVA_PRO_5.0_WALL_WASHER_TW_28W_24VDC.IES

Job Name/Date:

Fixture Type Designation:


NEVA PRO 5 SURFACE

NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 10569.9

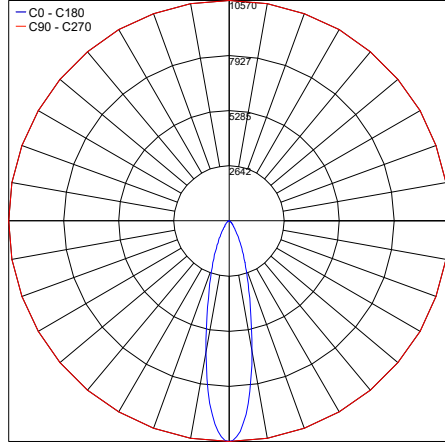


PHOTOMETRIC FILENAME : NEVA_PRO_5.1_S_23_TW_42W_24VDC.IES

Maximum Candela = 4800.9

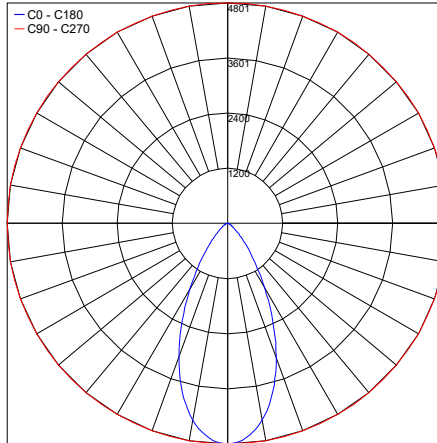


PHOTOMETRIC FILENAME : NEVA_PRO_5.1_W_29X49_TW_42W_24VDC.IES

Maximum Candela = 685

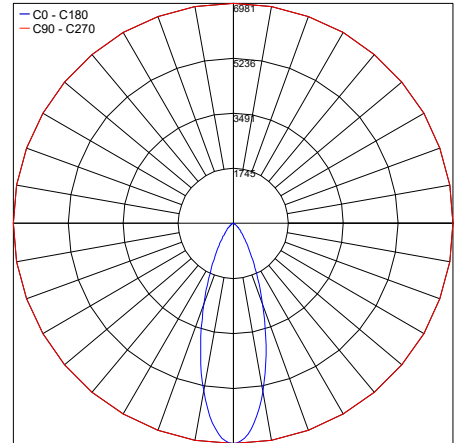


PHOTOMETRIC FILENAME : NEVA_PRO_5.1_M_34_TW_42W_24VDC.IES

Maximum Candela = 2341.3

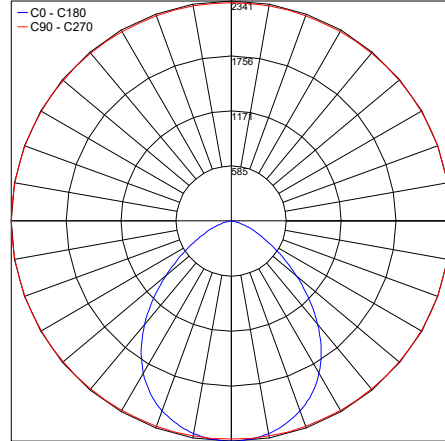


PHOTOMETRIC FILENAME : NEVA_PRO_5.1_38X90_TW_42W_24VDC.IES

Maximum Candela = 3244.92

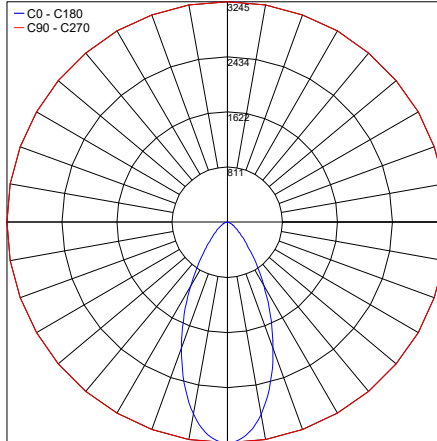


PHOTOMETRIC FILENAME : NEVA_PRO_5.1_L_47_TW_42W_24VDC.IES

Maximum Candela = 551.0

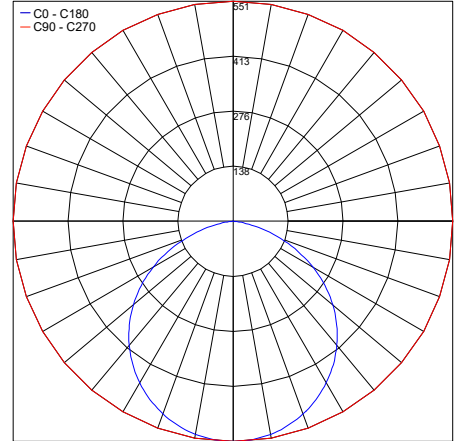

PHOTOMETRIC FILENAME : NEVA_PRO_5.1_DIFFUSE_TW_42W_24VDC.IES

Maximum Candela = 1772.3

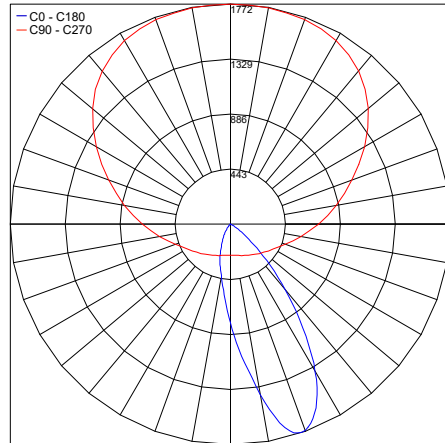

PHOTOMETRIC FILENAME : NEVA_PRO_5.1_WALL_WASHER_TW_42W_24VDC.IES

Job Name/Date:

Fixture Type Designation:


NEVA PRO 5 SURFACE

NEVA PRO 5.0, 5.1, 5.2 and NEVA MINI PRO 5

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 17616.5

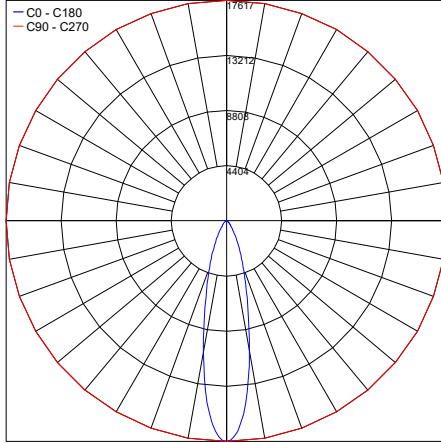


PHOTOMETRIC FILENAME : NEVA_PRO_5.2_S_23_TW_71W_24VDC.IES

Maximum Candela = 8001.6

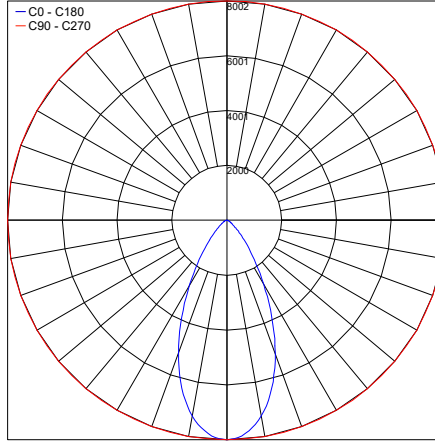


PHOTOMETRIC FILENAME : NEVA_PRO_5.2_W_29X49_TW_71W_24VDC.IES

Maximum Candela = 11635.8

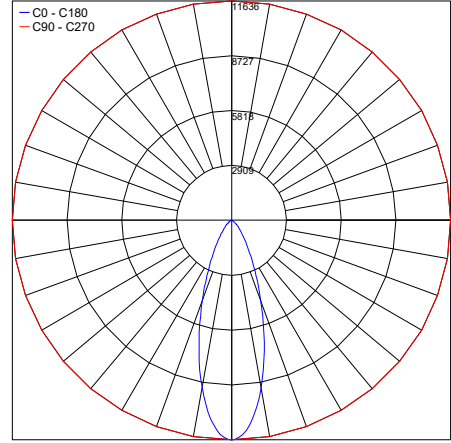


PHOTOMETRIC FILENAME : NEVA_PRO_5.2_M_34_TW_71W_24VDC.IES

Maximum Candela = 3902.1

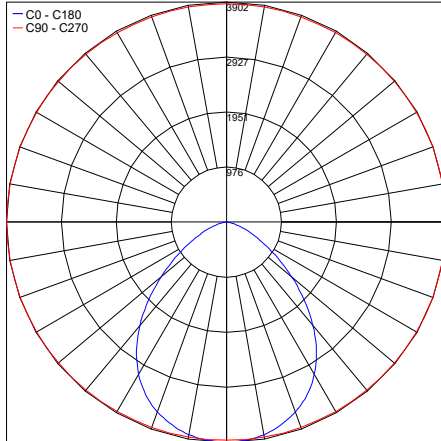


PHOTOMETRIC FILENAME : NEVA_PRO_5.2_38X90_TW_71W_24VDC.IES

Maximum Candela = 5408.2

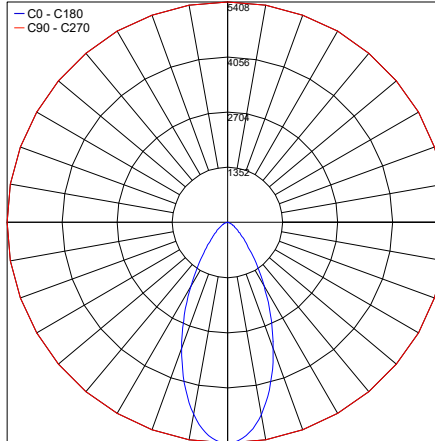


PHOTOMETRIC FILENAME : NEVA_PRO_5.2_L_47_TW_71W_24VDC.IES

Maximum Candela = 918.4

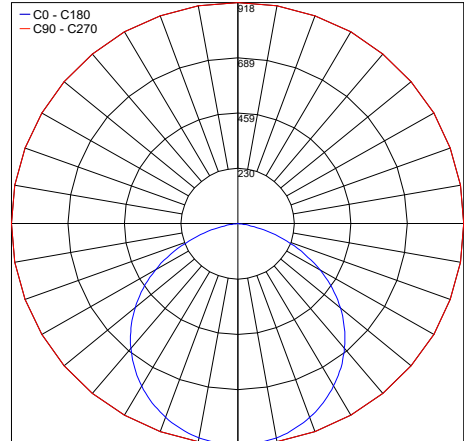

PHOTOMETRIC FILENAME : NEVA_PRO_5.2_DIFFUSE_TW_71W_24VDC.IES

Maximum Candela = 2953.8

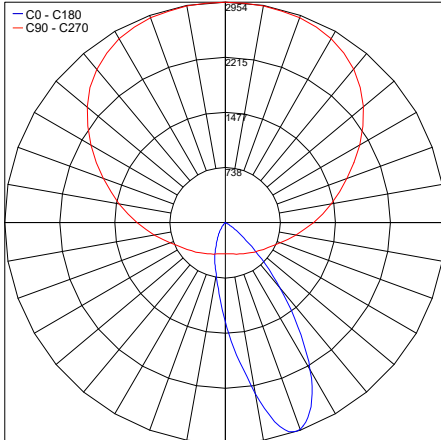

PHOTOMETRIC FILENAME : NEVA_PRO_5.2_WALL_WASHER_TW_71W_24VDC.IES

Job Name/Date:

Fixture Type Designation: