

NEVA PRO 6 SURFACE

NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

The Neva Pro 6 series are frameless linear profiles designed to enhance wall and facades with new generation optics with a variety of well-defined beams. Available in tunable white light (2200K-5000K) and 4 different lengths with in-grade housing for recessed applications or adjustable brackets for surface mount.

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: Black Painted Anodized Aluminum Lens: Transparent or Acid-Etched Tempered Glass Cable Length: 4.92' standard
CCT	Tunable White: 2200K - 5000K
CRI	>80
Delivered Lumens	See Chart on page 2 for Lumens / Efficacy
LED Spacing	4.72" between
Optics	23°, 34°, 47°, 29°x49°
Finishes	Black
Fixture Dimensions / Wt.	See Chart on page 2
LED Source	See Chart on page 2
Lumen Maintenance	L90, B10 >50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66, IP67
Impact Rating	IK06



ORDERING INFORMATION

Example: NP61000001H0MN or NP61000001H0MN-2. Accessories / Power Supplies ordered separately.

		H		N	
Model No.	Optical	CCT	Optics	Finish	Cable Length
NP0600 - Neva Pro Mini 6 (9W)	0000 - none	H - 2200K-5000K	0S - 23°	N - Black	4.92' standard
NP6000 - Neva Pro 6.0 (18W)	0001 - Honeycomb		0M - 34°		1 - 16.40'
NP6100 - Neva Pro 6.1 (26W)			0L - 47°		2 - 32.81'
NP6200 - Neva Pro 6.2 (44W)					4 - 65.62'

Job Name/Date:

Fixture Type Designation:

NEVA PRO 6 SURFACE


NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

TECHNICAL DATA


	NEVA MINI PRO 6	NEVA PRO 6.0	NEVA PRO 6.1	NEVA PRO 6.2
Wattage	9W	18W	26W	44W
Delivered Lumens (3500K)	670 lm (3500K, 34°)	1340 lm (3500K, 34°)	2011 lm (3500K, 34°)	3351 lm (3500K, 34°)
Fixture Dim. (l,w,h)	12.44" x 1.46" x 2.28"	26.65" x 1.46" x 2.28"	40.83" x 1.46" x 2.28"	69.21" x 1.46" x 2.28"
Fixture Weight	1.32 lbs	2.76 lbs	4.19 lbs	6.94 lbs
LED Source	12 power LEDs	24 power LEDs	48 power LEDs	60 power LEDs




NEVA MINI PRO 6

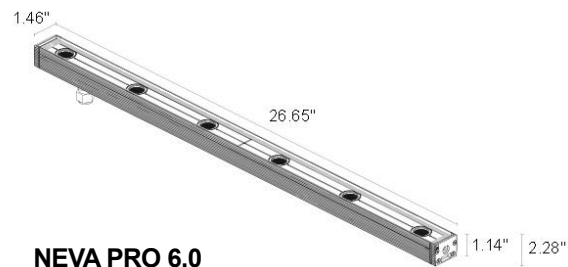

NEVA PRO 6.0

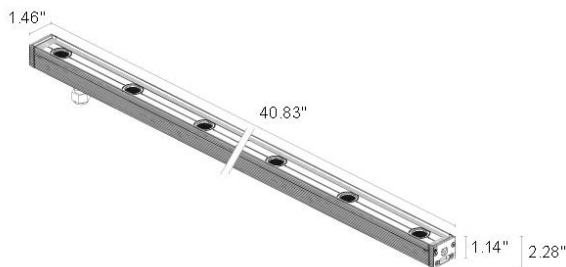

NEVA PRO 6.1

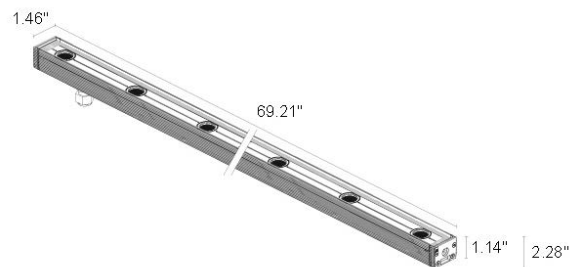

NEVA PRO 6.2

Job Name/Date:

Fixture Type Designation:

NEVA PRO 6 SURFACE

NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

SUGGESTED POWER SUPPLIES

24VDC - Tunable White

Part Number	Description	Input/Output	# of Fixtures / Power Supply			
			Neva Pro Mini 6	Neva Pro 6.0	Neva Pro 6.1	Neva Pro 6.2
			9W	18W	26W	44W
PPLT00701	Tunable White - 0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 50W, Class 2	1-4	1-2	1-1	—
PPLT00726	ELV / TRIAC & 0-10V to 0.1% Tunable White	120-277VAC to 24VDC, 96W, Class 2, Wet/Damp	1-8	1-4	1-2	1-1
PPLT00718	Tunable White DMX / RDM to 0.1% (2 Channels)	120-277VAC to 24VDC, 100W, Class 2	1-8	1-4	1-3	1-1

Job Name/Date:

Fixture Type Designation:

NEVA PRO 6 SURFACE

NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

ACCESSORIES - Installation



WMA09N
Pair of Brackets
2.95" h




WMA10N
Pair of Brackets
5.51" h



WN6001
Fixture Anti Fall Kit
*Optional for Ceiling Installations
(and if desired Wall)*

Anti-Glare



Honeycomb Louver
Optical Accessory
Built in - Order with fixture code



Anti-Glare Shield
Stainless steel painted black
WB6500 - Neva Pro Mini 6 (12.91")
WB6520 - Neva Pro 6.0 (26.50")
WB6521 - Neva Pro 6.1 (40.67")
WB6522 - Neva Pro 6.2 (69.06")

Job Name/Date:

Fixture Type Designation:


NEVA PRO 6 SURFACE

NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 2111.4

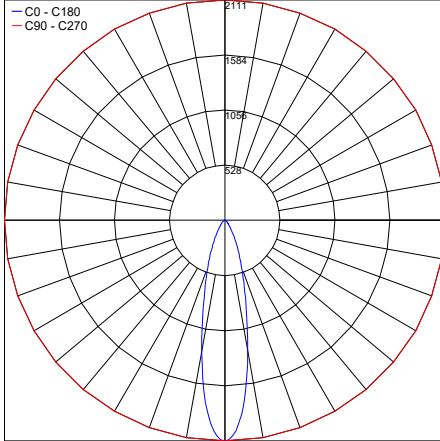


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_6_S_23_TW_14W_24VDC.IES

Maximum Candela = 960.2

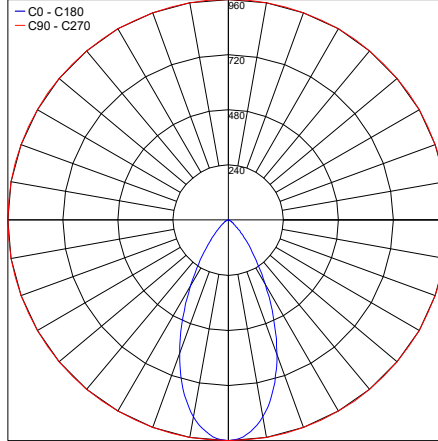


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_6_W_29X49_TW_14W_24VDC.IES

Maximum Candela = 1395.9

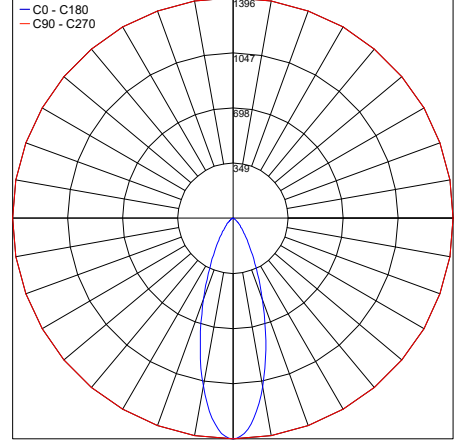


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_6_M_34_TW_14W_24VDC.IES

Maximum Candela = 648.0

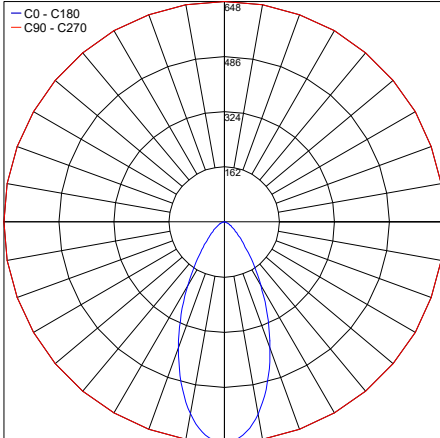


PHOTOMETRIC FILENAME : NEVA_MINI_PRO_6_L_47_TW_14W_24VDC.IES

Maximum Candela = 4226

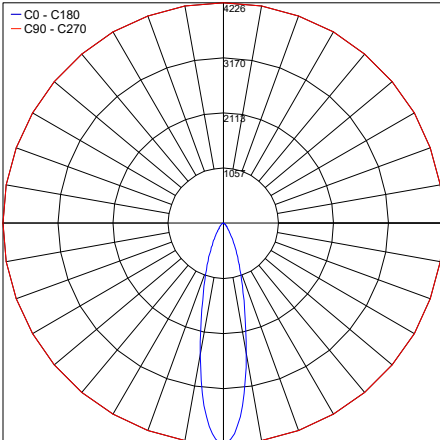


PHOTOMETRIC FILENAME : NEVA_PRO_6.0_S_23_TW_28W_24VDC.IES

Maximum Candela = 1920.4

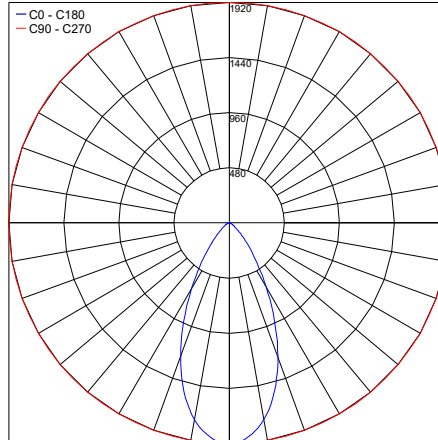

PHOTOMETRIC FILENAME : NEVA_PRO_6.0_W_29X49_TW_28W_24VDC.IES

Maximum Candela = 2791.8

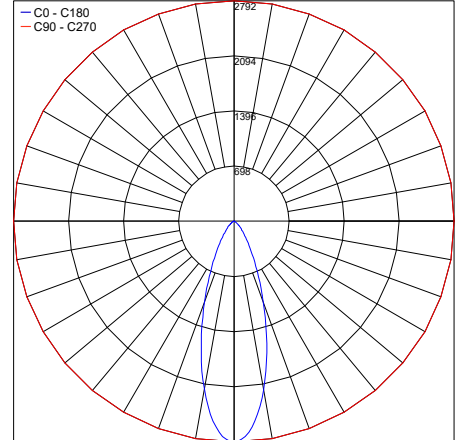

PHOTOMETRIC FILENAME : NEVA_PRO_6.0_M_34_TW_28W_24VDC.IES

Job Name/Date:

Fixture Type Designation:


NEVA PRO 6 SURFACE

NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 1297.2

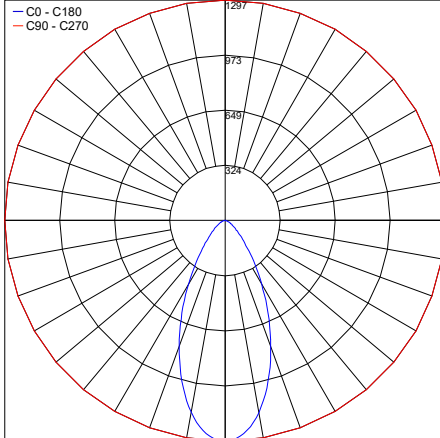


PHOTOMETRIC FILENAME : NEVA_PRO_6.0_L_47_TW_28W_24VDC.IES

Maximum Candela = 6340.6

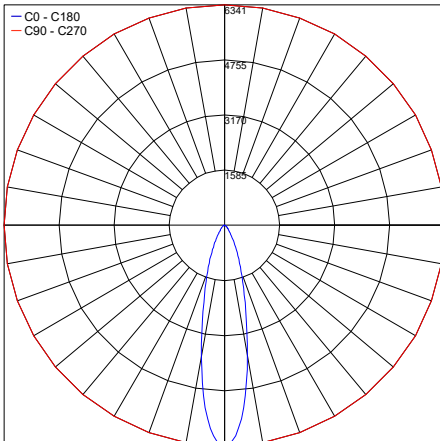


PHOTOMETRIC FILENAME : NEVA_PRO_6.1_S_23_TW_42W_24VDC.IES

Maximum Candela = 2880.6

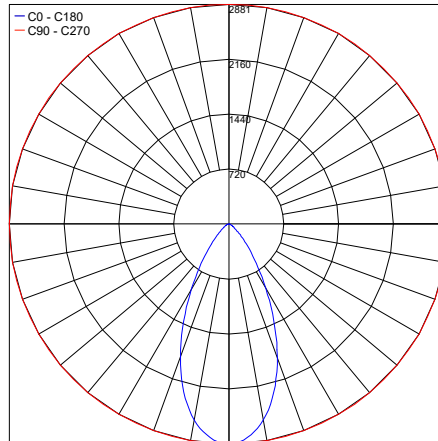


PHOTOMETRIC FILENAME : NEVA_PRO_6.1_W_29X49_TW_42W_24VDC.IES

Maximum Candela = 4187.6

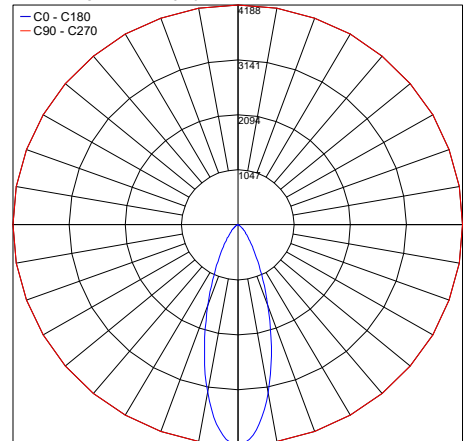

PHOTOMETRIC FILENAME : NEVA_PRO_6.1_M_34_TW_42W_24VDC.IES

Maximum Candela = 1946.5

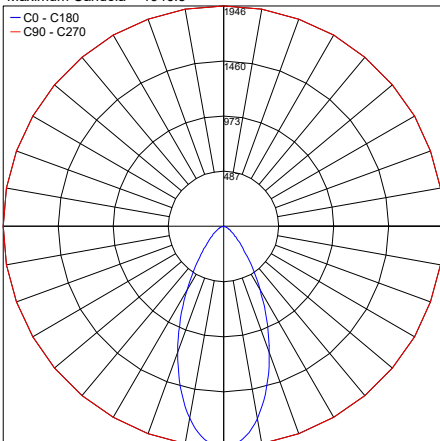

PHOTOMETRIC FILENAME : NEVA_PRO_6.1_L_47_TW_42W_24VDC.IES

Job Name/Date:

Fixture Type Designation:


NEVA PRO 6 SURFACE

NEVA PRO 6.0, 6.1, 6.2 and NEVA MINI PRO 6

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 10569.9

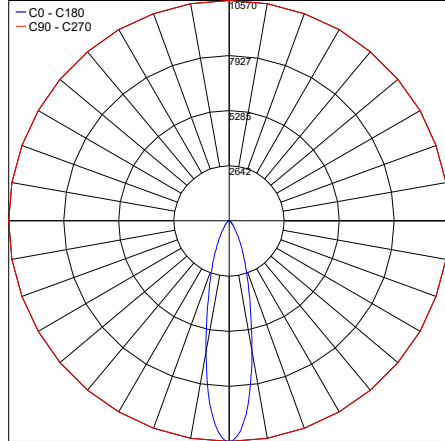


PHOTOMETRIC FILENAME : NEVA_PRO_6.2_S_23_TW_71W_24VDC.IES

Maximum Candela = 4800.9

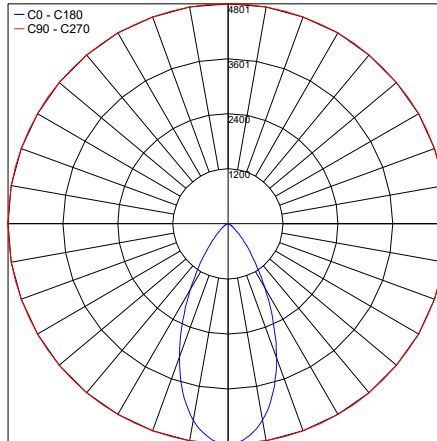


PHOTOMETRIC FILENAME : NEVA_PRO_6.2_W_29X49_TW_71W_24VDC.IES

Maximum Candela = 6981.5

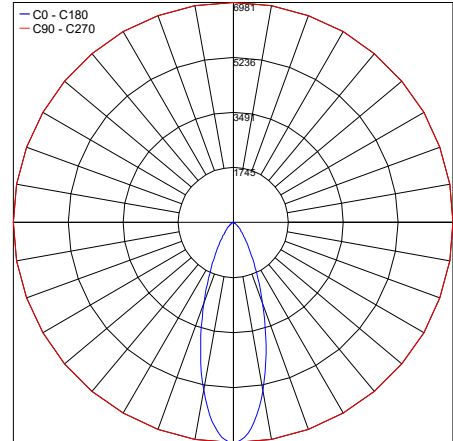

PHOTOMETRIC FILENAME : NEVA_PRO_6.2_M_34_TW_71W_24VDC.IES

Maximum Candela = 3244.9

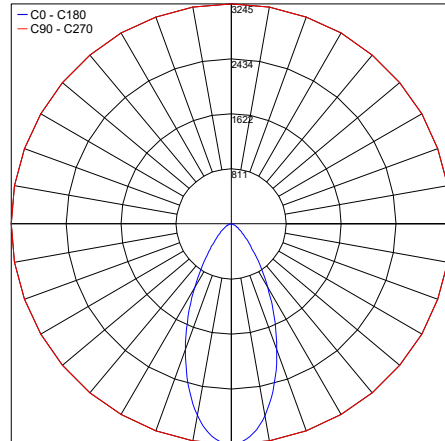

PHOTOMETRIC FILENAME : NEVA_PRO_6.2_L_47_TW_71W_24VDC.IES

Job Name/Date:

Fixture Type Designation: