

Itaca

CONTEMPORANEITY AND MINIMALISM

The purity of the lines that define a simple geometry makes ITACA a wall-mounted fixture sophisticated in its linearity and lightness.

Available in four different sizes (45, 90, 135, 180) with power ratings range from 1.9 W to 8.7 W in the largest version, all models feature a 24VDC remote power supply.

The body is made of primary-alloy aluminum, treated with anodization and coated with polyester powder.

The textured, sandblasted glass ensures optimal light uniformity and is robotically bonded using silicone adhesive.

IP66 protection is ensured by polyurethane resin that fully isolates all sensitive electronic components.

designplan®










Itaca 45

wall



Available finishes:

- *white*
- *sand*
- *graphite*
- *aluminum*
- *corten*
- *olive green*

Light Source	mid power led
Supply	24VDC
Dimmer	only 24V
CRI	(PWM) ≥80
IP rating	IP66
Electrical Class	II, III
Application	wall
Diffuser	texturized sandblasted glass

Power	1.5W LED - 1.9W total
LED Color temp.	2700K / 3000K




			white	sand	graphite	aluminum	corten	green
2700K 1.5W LED 1.9W Total	24V	lm	903032002	903032003	903032004	903032005	903032008	9030320016

			white	sand	graphite	aluminum	corten	green
3000K 1.5W LED 1.9W Total	24V	lm	903012002	903012003	903012004	903012005	903012008	9030120016

Itaca 90

wall



Available finishes:

- *white*
- *sand*
- *graphite*
- *aluminum*
- *corten*
- *olive green*

Light Source	mid power led
Supply	24VDC
Dimmer	only 24V (PWM)
CRI	≥80
IP rating	IP66
Dimmer	phase cut
Electrical Class	II, III
Application	wall
Diffuser	texturized sandblasted glass

Power	24V 3.4W LED - 4.1W Total
LED Color temp.	2700K / 3000K




			white	sand	graphite	aluminum	corten	green
2700K 3.4W LED 4.1W Total	24V	lm	903032012	903032013	903032014	903032015	903032018	9030320116

			white	sand	graphite	aluminum	corten	green
3000K 3.4W LED 4.1W Total	24V	lm	903012012	903012013	903012014	903012015	903012018	9030120116

Itaca 135

wall



Available finishes:

- *white*
- *sand*
- *graphite*
- *aluminum*
- *corten*
- *olive green*

Light Source	mid power led
Supply	24VDC
Dimmer	only 24V (PWM)
CRI	≥80
IP rating	IP66
Dimmer	phase cut
Electrical Class	II, III
Application	wall
Diffuser	texturized sandblasted glass

Power	4.9W LED - 6W Total
LED Color temp.	2700K / 3000K




			white	sand	graphite	aluminum	corten	green
2700K 4.9W LED 6W Total	24V	lm	903032022	903032023	903032024	903032025	903032028	9030320216

			white	sand	graphite	aluminum	corten	green
3000K 4.9W LED 6W Total	24V	lm	903012022	903012023	903012024	903012025	903012028	9030120216

Itaca 180

wall

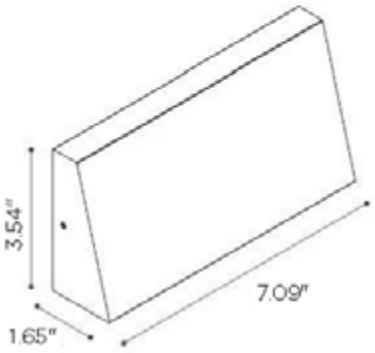

Available finishes:

- *white*
- *sand*
- *graphite*
- *aluminium*
- *corten*
- *olive green*

Light Source	mid power led
Supply	24VDC
Dimmer	only 24V (PWM)
CRI	≥80
IP rating	IP66
Dimmer	phase cut 220-240V
Electrical Class	II, III
Application	wall
Diffuser	texturized sandblasted glass

Power	24V 6.6W LED - 8W Total
Led Color temp.	2700K / 3000K




			white	sand	graphite	aluminum	corten	green
2700K 6.6W LED 8W Total	24V	lm	903032032	903032033	903032034	903032035	903032038	9030320316

			white	sand	graphite	aluminum	corten	green
3000K 6.6W LED 8W Total	24V	lm	903012032	903012033	903012034	903012035	903012038	9030120316




ACCESSORIES




Recessed box
2.8" x 2.8" x 2.1"
For Itaca 90 and 135

code **9018**



Recessed box
2.9" x 4.2" x 2.1"
For Itaca 135 and 180

code **9019**



Recessed box
2.9" X 5.2" X 2.1"
For Itaca 180

code **9089**