



Itaca

CONTEMPORANEITY AND MINIMALISM


The purity of the lines that define a simple geometry makes ITACA a wall-mounted fixture sophisticated in its linearity and lightness.

Available in four different sizes (45, 90, 135, 180) with power ratings range from 1.9 W to 8.7 W in the largest version, all models feature an integrated power supply in 24VDC version.

The body is made of primary-alloy aluminum, treated with anodization and coated with polyester powder.

The textured, sandblasted glass ensures optimal light uniformity and is robotically bonded using silicone adhesive.

IP66 protection is ensured by polyurethane resin that fully isolates all sensitive electronic components.

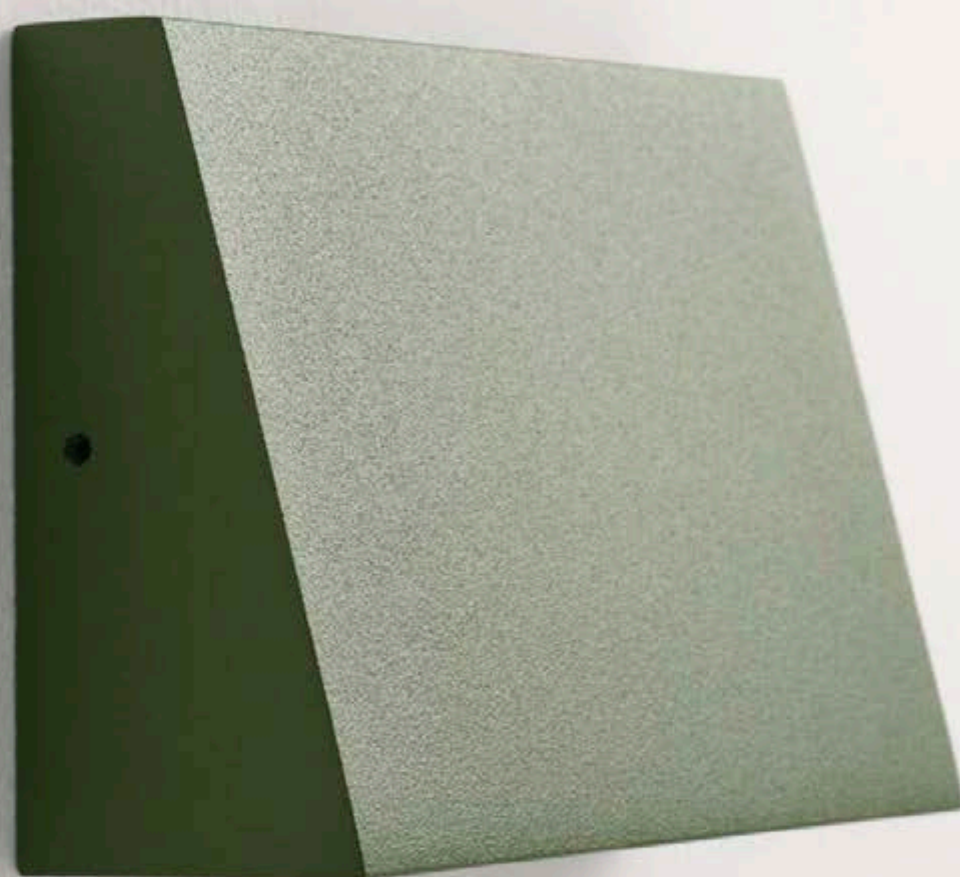








Itaca 45

wall



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
24VDC
only 24V
(PWM) ≥80
IP66
II, III
wall
texturized sandblasted glass


Power 1.5W LED - 1.9W total
LED Color temp. 2700K / 3000K



			white	sand	graphite	aluminum	corten	green
2700K 1.5W LED 1.9W Total	24V	lm	903032002	903032003	903032004	903032005	903032008	9030320016
			white	sand	graphite	aluminum	corten	green
3000K 1.5W LED 1.9W Total	24V	lm	903012002	903012003	903012004	903012005	903012008	9030120016

Itaca 90

wall



Available finishes:

- white
- sand
- graphite
- aluminum
- corten
- olive green

Light Source
Supply
Dimmer
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

mid power led
24VDC
only 24V (PWM)
≥80
IP66
phase cut
II, III
wall
texturized sandblasted glass


Power 24V 3.4W LED - 4.1W Total
LED Color temp. 2700K / 3000K



			white	sand	graphite	aluminum	corten	green
2700K	24V	lm	903032012	903032013	903032014	903032015	903032018	9030320116
3.4W LED								
4.1W Total								
			white	sand	graphite	aluminum	corten	green
3000K	24V	lm	903012012	903012013	903012014	903012015	903012018	9030120116
3.4W LED								
4.1W Total								

Itaca 135

wall



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

mid power led
24VDC
only 24V (PWM)
≥80
IP66
phase cut
II, III
wall
texturized sandblasted glass

Power 4.9W LED - 6W Total


LED Color temp. 2700K / 3000K



			white	sand	graphite	aluminum	corten	green
2700K 4.9W LED 6W Total	24V	lm	903032022	903032023	903032024	903032025	903032028	9030320216
			white	sand	graphite	aluminum	corten	green
3000K 4.9W LED 6W Total	24V	lm	903012022	903012023	903012024	903012025	903012028	9030120216

Itaca 180

wall

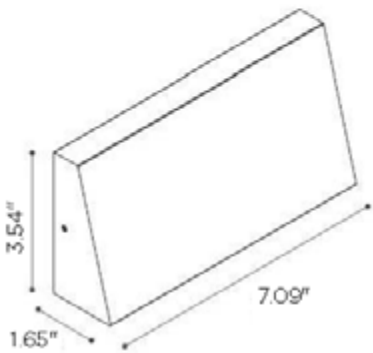

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
Dimmer
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

mid power led
24VDC
only 24V (PWM)
≥80
IP66
phase cut 220-240V
II, III
wall
texturized sandblasted glass


Power 24V 6.6W LED - 8W Total
Led Color temp. 2700K / 3000K



			white	sand	graphite	aluminum	corten	green
2700K	24V	lm	903032032	903032033	903032034	903032035	903032038	9030320316
6.6W LED								
8W Total								
			white	sand	graphite	aluminum	corten	green
3000K	24V	lm	903012032	903012033	903012034	903012035	903012038	9030120316
6.6W LED								
8W Total								




ACCESSORIES




*Recessed box
2.8" x 2.8" x 2.1"
For Itaca 90 and 135*

code 9018



*Recessed box
2.9" x 4.2" x 2.1"
For Itaca 135 and 180*

code 9019



*Recessed box
2.9" X 5.2" X 2.1"
For Itaca 180*

code 9089

ACCESSORIES:

code 9018 / 9019 / 9089