

IKAR CEILING with ROD


IKAR is a unique luminaire characterized by a ring light with a fully adjustable head that can be freely rotated up to 360° as well as a $\pm 90^\circ$ for an optimum adaptation of light at different angles. It is offered in 2 sizes, 4 color temperatures and various mounting options - track, ceiling or recessed. IKAR Ceiling with Rod is the surface mounted on a rod version available in 9 lengths. Only in 5.0 inch size.

TECHNICAL DATA

Wattage	6W (Low Power) 8W (High Efficiency)
Power Supply	Integral 120-277VAC
Construction	Body: Aluminum
CCT	2700K, 3000K, 4000K, 5000K
CRI	>80, >90
Delivered Lumens 3000K	379 lm (6W, >80), 334 lm (6W, >90) 530 lm (8W, >80), 467 lm (8W, >90)
Efficacy	63.2 lm (6W, >80), 55.7 lm (6W, >90) 66.3 lm (8W, >80), 58.4 lm (8W, >90)
Optics	60°
Finishes	White, Black
Fixture Dimensions	Ø5.0" x 3.9", 7.9", 11.8", 15.8", 19.7", 23.6", 27.6", 31.5", 35.4" Rod Length
Fixture Weight	1.8 lbs (Ø5.0")
Lumen Maintenance	L80, B20 at 100,000 hrs (Ta=25 °C)
Color Consistency	3-Step MacAdam
IP Rating	IP20
Impact Rating	IK02



Fixture Dimensions

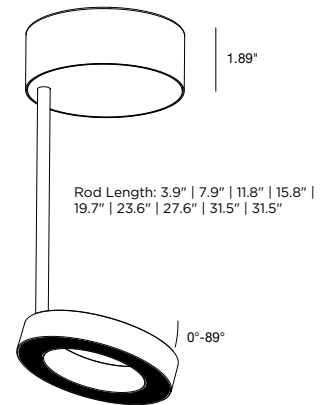

ORDERING INFORMATION

Example: IKCR603000L3020.

IK	CR60					
Model #	Description	Rod Length	Power Output	CCT	Dimming	Finish
IK	CR60 - IKAR Ceiling w/ Rod	1000 - 3.9" 2000 - 7.9" 3000 - 11.8" 4000 - 15.8" 5000 - 19.7" 6000 - 23.6" 7000 - 27.6" 8000 - 31.5" 9000 - 35.4"	L - Low Power E - High Efficiency	2 - 27K, CRI>80 3 - 30K, CRI>80 4 - 40K, CRI>80 5 - 50K, CRI>80 6 - 27K, CRI>90 7 - 30K, CRI>90 8 - 40K, CRI>90 9 - 50K, CRI>90	0 - Non-Dim 1 - DALI	10 - White 20 - Black


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 342.4

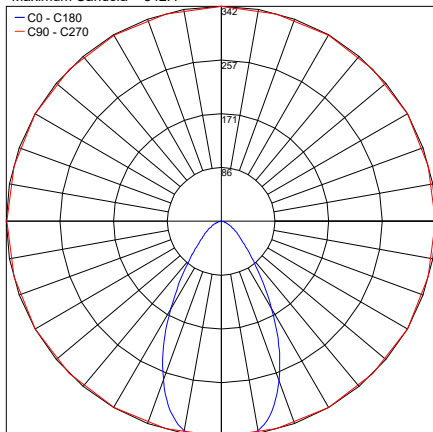


PHOTOMETRIC FILENAME : IKAR CEILING W ROD100-800 127 LP CR180 30K FO WHITE.IES

Maximum Candela = 301.6

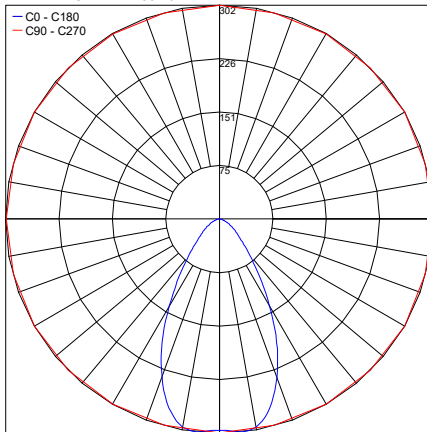


PHOTOMETRIC FILENAME : IKAR CEILING W ROD100-800 127 LP CR190 30K FO WHITE.IES

Maximum Candela = 480.0

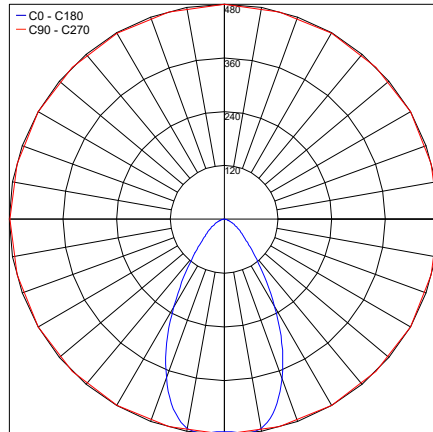

PHOTOMETRIC FILENAME : IKAR CEILING W ROD100-800 127 HE CR180 30K FO WHITE.IES

Maximum Candela = 422.1

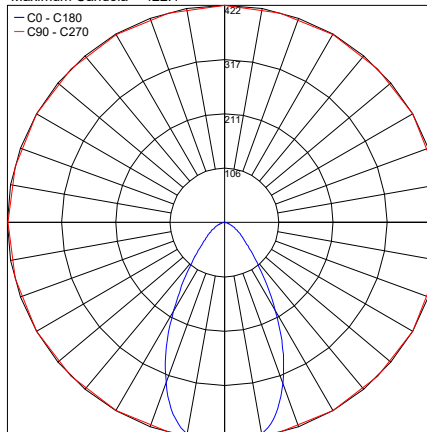

PHOTOMETRIC FILENAME : IKAR CEILING W ROD100-800 127 HE CR190 30K FO WHITE.IES

Job Name/Date:

Fixture Type Designation: