

# IKAR TRACK with ROD

IKAR is a unique luminaire characterized by a ring light with a fully adjustable head that can be freely rotated up to 360° as well as a ±90° for an optimum adaptation of light at different angles. It is offered in 2 sizes, 4 color temperatures and various mounting options - track, ceiling or recessed. IKAR Track with Rod is the version that easily mounts on a 48V track with a rod available in 9 lengths. Track by others.



## TECHNICAL DATA

|                               |                                                                                            |
|-------------------------------|--------------------------------------------------------------------------------------------|
| <b>Wattage</b>                | Low Power: 4W (Ø2.6"), 6W (Ø5.0")<br>High Efficiency: 5W (Ø2.6"), 8W (Ø5.0")               |
| <b>Power Supply</b>           | Remote, not included. See page 2.<br>48V DC to DC Driver included in Track                 |
| <b>Construction</b>           | Body: Aluminum                                                                             |
| <b>CCT</b>                    | 2700K, 3000K, 4000K, 5000K                                                                 |
| <b>CRI</b>                    | >80, >90                                                                                   |
| <b>Delivered Lumens 3000K</b> | 201 lm (4W, >80), 379 lm (6W, >80)<br>281 lm (5W, >80), 530 lm (8W, >80)                   |
| <b>Efficacy</b>               | 50.3 lm (4W, >80), 63.2 lm (6W, >80)<br>56.2 lm (5W, >80), 66.3 lm (8W, >80)               |
| <b>Optics</b>                 | 60°                                                                                        |
| <b>Finishes</b>               | White, Black                                                                               |
| <b>Fixture Dimensions</b>     | Ø2.6" or Ø5.0" x 3.9", 7.9", 11.8", 15.8",<br>19.7", 23.6", 27.6", 31.5", 35.4" Rod Length |
| <b>Fixture Weight</b>         | 1.3 lbs (Ø2.6")<br>1.8 lbs (Ø5.0")                                                         |
| <b>Lumen Maintenance</b>      | L80, B20 at 100,000 hrs (Ta=25 °C)                                                         |
| <b>Color Consistency</b>      | 3-Step MacAdam                                                                             |
| <b>IP Rating</b>              | IP20                                                                                       |
| <b>Impact Rating</b>          | IK02                                                                                       |



## Fixture Dimensions

Rod Length: 3.9" | 7.9" | 11.8" | 15.8" |  
19.7" | 23.6" | 27.6" | 31.5" | 35.4"



## ORDERING INFORMATION

Example: IKLTR603000E3120. Accessories / Power Supplies ordered separately.

| IK      |                                 |              |                     |                 | 1        |            |
|---------|---------------------------------|--------------|---------------------|-----------------|----------|------------|
| Model # | Description                     | Rod Length   | Power Output        | CCT             | Dimming  | Finish     |
| IK      | STR60 - IKAR Track w/ Rod Ø2.5" | 1000 - 3.9"  | L - Low Power       | 2 - 27K, CRI>80 | 1 - DALI | 10 - White |
|         | LTR60 - IKAR Track w/ Rod Ø5.0" | 2000 - 7.9"  | E - High Efficiency | 3 - 30K, CRI>80 |          | 20 - Black |
|         |                                 | 3000 - 11.8" |                     | 4 - 40K, CRI>80 |          |            |
|         |                                 | 4000 - 15.8" |                     | 5 - 50K, CRI>80 |          |            |
|         |                                 | 5000 - 19.7" |                     | 6 - 27K, CRI>90 |          |            |
|         |                                 | 6000 - 23.6" |                     | 7 - 30K, CRI>90 |          |            |
|         |                                 | 7000 - 27.6" |                     | 8 - 40K, CRI>90 |          |            |
|         |                                 | 8000 - 31.5" |                     | 9 - 50K, CRI>90 |          |            |
|         |                                 | 9000 - 35.4" |                     |                 |          |            |

Job Name/Date:


Fixture Type Designation:

## SUGGESTED POWER SUPPLIES for 48V TRACK (by others)

Consult Factory if needed

## PHOTOMETRIC DATA

Note: All photometry is 3000K

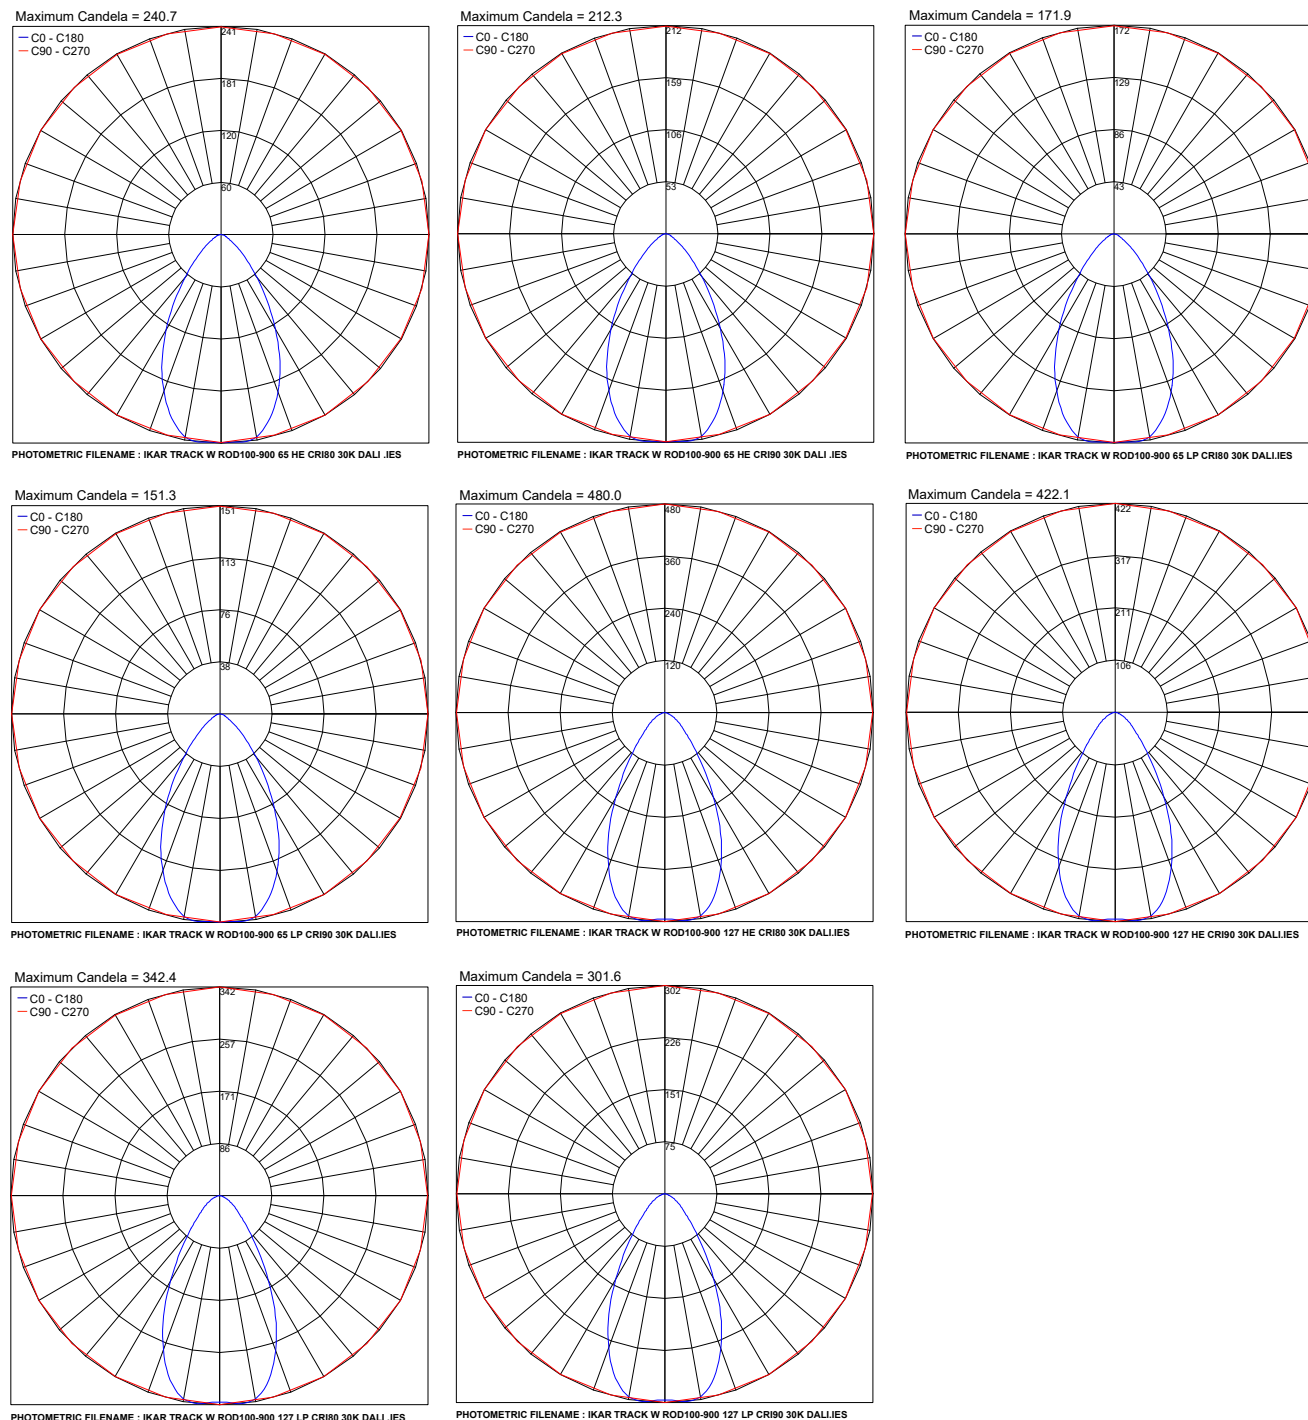

Job Name/Date:

Fixture Type Designation: