
GEM PRO 4 RGBW

datasheet

Gem Pro is a round, IP67-rated, recessed fixture with frame, suitable for installation in floors or walls, made to ensure durability and maximum resistance against atmospheric agents. Gem Pro 4 RGBW is the Ø5.4" aperture version offering RGBW or RGBA light with various optics options.



Fixture Dimensions

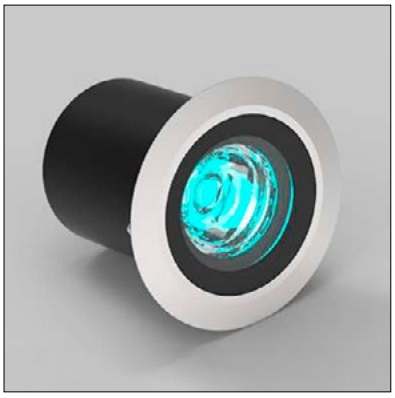

TECHNICAL DATA

Wattage / Input	15W (RGBW, RGBA)
Power Supply	Remote 1200mA, not included. Consult Factory
Construction	Body: Anticorodal Aluminum, Stainless Steel on request. Front Ring Nut: AISI 316L Stainless Steel Lens: PMMA (Acrylic) Diffuser: Extra Clear Glass Cable Length: 1.64'
CCT	RGBW (3000K or 4000K), RGBA (Amber)
Delivered Lumens	940 lm (RGBW)
Efficacy	62.7 lm/W (RGBW)
Optics	5 Standard, See Below
Finishes	3 Standard, See Below
Fixture Dimensions	Ø5.71" x 5.91" h
Aperture	Ø5.39"
Cutout Dimensions	Ø3.70"
Color Consistency	<3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driveover Capacity	Up to 3307 lbs

ORDERING INFORMATION

Example: LM07.200011.US.16.CC.F1.R3. Accessories / Power Supplies ordered separately.

LM07.200011.US	.		.	CC	.		.	

Model No.	Finish	Controls	Optic	CCT
LM07.200011.US	**14** - 304 Stainless Steel **59** - Bronze Stainless St. **16** - 316 Stainless Steel	**CC** - Remote Constant Current (Consult Factory)	**M2** - 25° Medium **M4** - 35° Medium **F1** - 40° Flood **F3** - 50° Flood **W1** - Wall Washer 1	R3 - RGBW (3000K) R4 - RGBW (4000K) R9 - RGBA (Amber)

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2026 Designplan Lighting, Inc.

Published: November 12, 2026

P: 908-996-7710
F: 908-996-7042

SUGGESTED POWER SUPPLIES

1200mA - Consult Factory

ACCESSORIES - Installation



LM20.104131

Outer Casing IP20

Sizes Ø4.92" x 6.30" h

Hole Ø3.98"

Job Name/Date:

Fixture Type Designation:

sales@designplan.com

www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2026 Designplan Lighting, Inc.

Published: November 12, 2026

P: 908-996-7710

F: 908-996-7042