MARIS 3.2

datasheet

Maris is a family of outdoor surface mounted luminaires made of AISI 316L stainless steel finished with a proprietary AC19® treatment designed to withstand the most extreme environments, even where salt air, humidity and corrosive agents put materials to the test. Maris 3.2 is the 3.9” x 4.7” up/down version offered in 4 color temperatures, 6 optic options and 4 standard marine-grade finishes.



Fixture Dimensions



TECHNICAL DATA

Wattage / Input	13W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: AISI 316L Stainless Steel with AC19® treatment Lens: Black-serigraphed, Tempered, Extra-clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>90
BUG Rating	B0-U3-G0 (Diffuse), B1-U3-G0 (Asym, Asym+17°), B1-U4-G0 (All other optics)
Delivered Lumens	1116 lm (27°, 3000K)
Efficacy	85.8 lm/W (27°, 3000K)
Optics	17°+17°, 17°+52°, 26°+26°, 37°+37°, 52°+52°, Asymmetrical, Asymmetrical + 17°, Diffuse
Finishes	4 Standard, see below *(4 Stage Marine Grade Finish)*
Fixture Dimensions	3.94” w x 3.90” l x 4.72” h
Fixture Weight	3.28 lbs
LED Source	2 COB LEDs
Lumen Maintenance	L80, B10 >60,000hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
IK Rating	IK05

ORDERING INFORMATION

Example: MR320010015LLT. Power Supplies / Accessories ordered separately.

MR3200	**1**				

Model #	CRI	Honeycomb Louver	CCT	Optics		Finish
MR3200	**1** - CRI>90	**000** - None **001** - Honeycomb Louver ****NOTE:** Honeycomb Louver not available on (DD) Diffuse or (AA / AS) Asymmetric optics.	**N** - 2200K **F** - 2700K **5** - 3000K **9** - 4000K	**SS** - 17°+17° **SK** - 17°+52° **MM** - 26°+26° **LL** - 37°+37° **KK** - 52°+52°	**AA** - Asym** **AS** - Asym+17°** **DD** - Diffuse**	**E** - White **H** - Anthracite **T** - Cor-ten **I** - Stainless Steel

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825
© Copyright 2026 Designplan Lighting, Inc.
Published: November 20, 2026
P: 908-996-7710
F: 908-996-7042

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-6
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-6

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC , 96W, Class 2	1-5

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5

For other power supply options consult factory.

ACCESSORIES

Anti-glare



Honeycomb Louver*

*Optical accessory added in ordering matrix

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2026 Designplan Lighting, Inc.

Published: November 20, 2026

P: 908-996-7710
F: 908-996-7042

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 4172.8

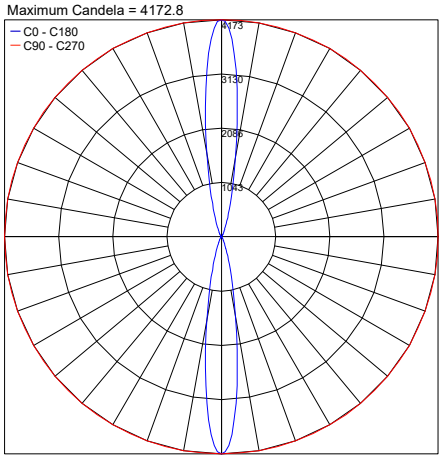

PHOTOMETRIC FILENAME : MARIS_3.2_SS_17_3000K_13W_24VDC.IES

Maximum Candela = 4172.7

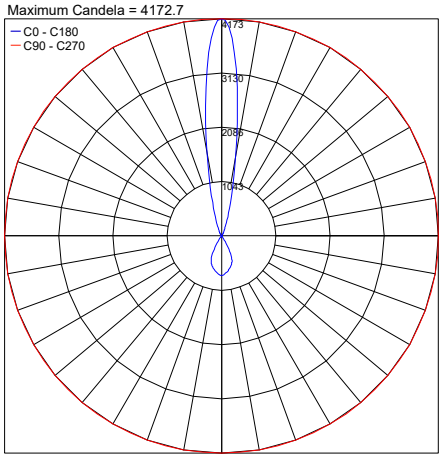

PHOTOMETRIC FILENAME : MARIS_3.2_SK_17+52_3000K_13W_24VDC.IES

Maximum Candela = 2317.0

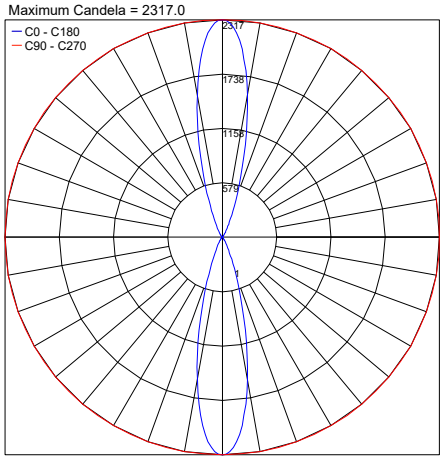

PHOTOMETRIC FILENAME : MARIS_3.2_MM_26_3000K_13W_24VDC.IES

Maximum Candela = 1196.0

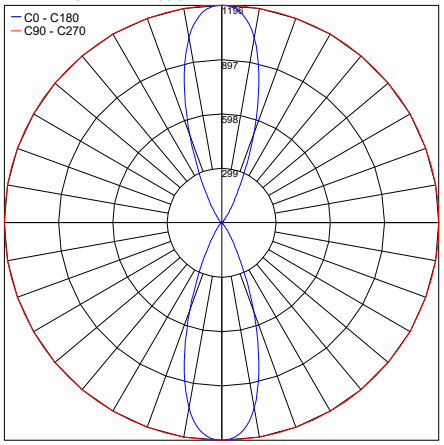

PHOTOMETRIC FILENAME : MARIS_3.2_LL_37_3000K_13W_24VDC.IES

Maximum Candela = 758.8

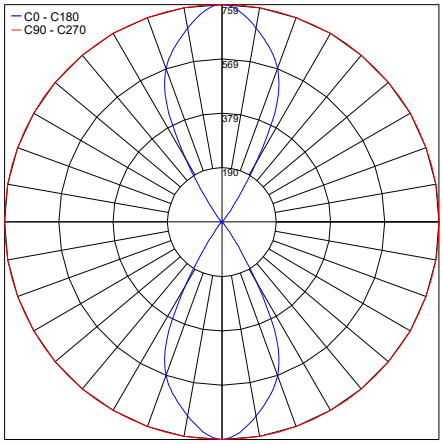

PHOTOMETRIC FILENAME : MARIS_3.2_KK_52_3000K_13W_24VDC.IES

Maximum Candela = 812.5

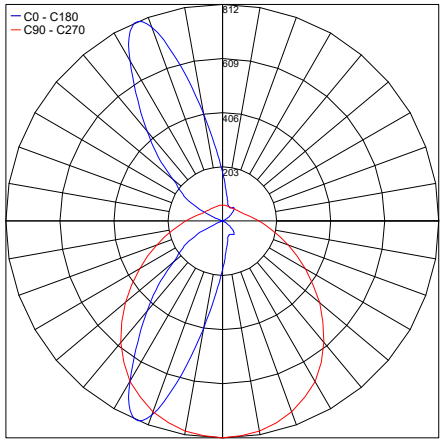

PHOTOMETRIC FILENAME : MARIS_3.2_AA_3000K_13W_24VDC.IES

Maximum Candela = 4172.8

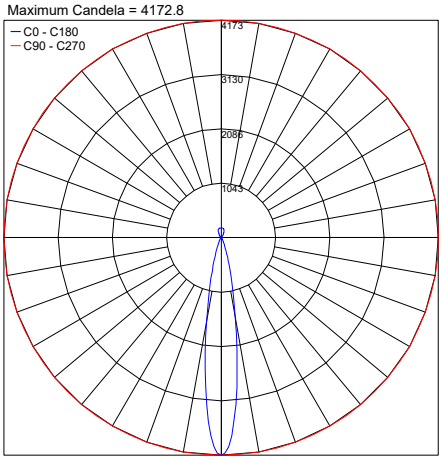

PHOTOMETRIC FILENAME : MARIS_3.2_AS_ASYMM+17_3000K_13W_24VDC.IES

Maximum Candela = 281.8

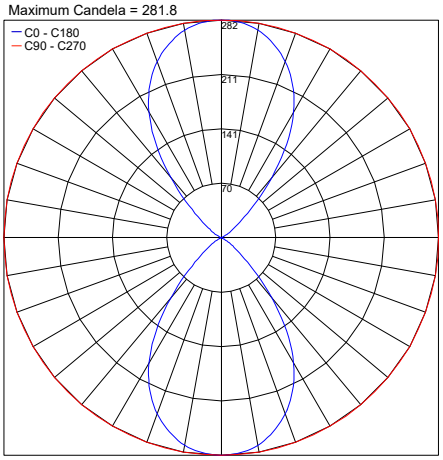

PHOTOMETRIC FILENAME : MARIS_3.2_DD_3000K_13W_24VDC.IES

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2026 Designplan Lighting, Inc.

Published: November 20, 2026

P: 908-996-7710
F: 908-996-7042