

FLASH MAXI COB


Flash are a family of round floodlights for outdoor installation on a façade or wall. It is available in a medium, maxi or mega version with various optics and 3 standard finishes.



TECHNICAL DATA

Wattage / Input	36W (120-277VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28'
CCT	3000K, 4000K
BUG Rating	B0-U5-G0
Delivered Lumens	2277 lm (3000K)
Efficacy	63.3 lm/W (3000K)
Optics	35°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø7.79" x 10.91"
Fixture Weight	7.7 lbs
LED Source	1 CREE CXB 2530 COB LED
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions:

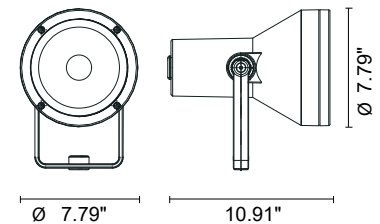

ORDERING INFORMATION

Example: 101104P-30K-35-MB. Accessories ordered separately.

101104P	-		-	35	-	
Model No.	CCT	Optic	Finish			
101104P	30K - 3000K 40K - 4000K	35 - 35°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare



AC-027P-xx

Anti-Glare Visor - *For Flash Maxi version*

Include one of the below finishes:


TG - Textured Gray

AG - Anthracite Gray

MB - Matte Black (on request)

PHOTOMETRIC DATA

Maximum Candela = 7700.13

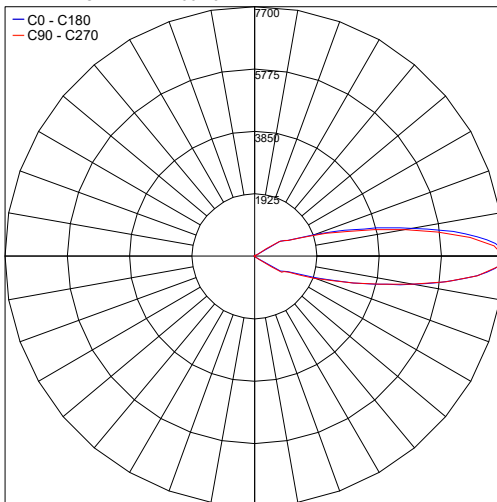

PHOTOMETRIC FILENAME : 101104P FLASH MAXI COB 35DEG.IES

Job Name/Date:

Fixture Type Designation: