


TECH MEDIUM 02 SQUARE PRO


Tech Medium 02 Square Pro is a wall mounted luminaire for outdoor installation with an up and down light distribution and adjustable +/- 15°. It is available in 3000K with 3 optic options and 3 standard finishes.

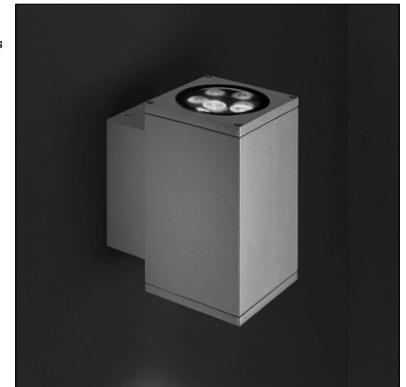

TECHNICAL DATA

Wattage / Input	2 x 14W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass
CCT	3000K
Delivered Lumens	1300 lm per beam (10°)
Efficacy	92.9 lm/W per beam
Optics	3 Standard, See Below
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	5.51" w x 5.51" l x 9.37" h
LED Source	5 CREE "XP-L" High Power LED up and 5 CREE "XP-L" High Power LED down
Fixture Weight	6.6 lbs
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions

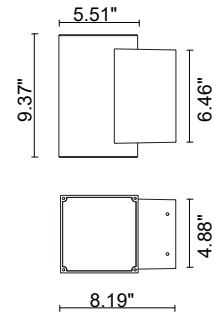

ORDERING INFORMATION

Example: 401018P-30K-10-MB


401018P	-	30K	-		-	
Model No.	CCT	Optics	Finish			
401018P	30K - 3000K	10 - 10° 30 - 30° 45 - 45°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Maximum Candela = 53240.2

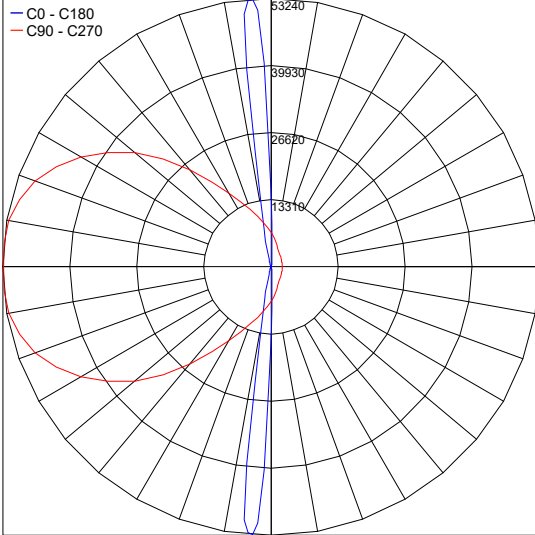

PHOTOMETRIC FILENAME : 401018 TECH MED 02 SQ PRO 2X14 10°.IES

Maximum Candela = 5726.6

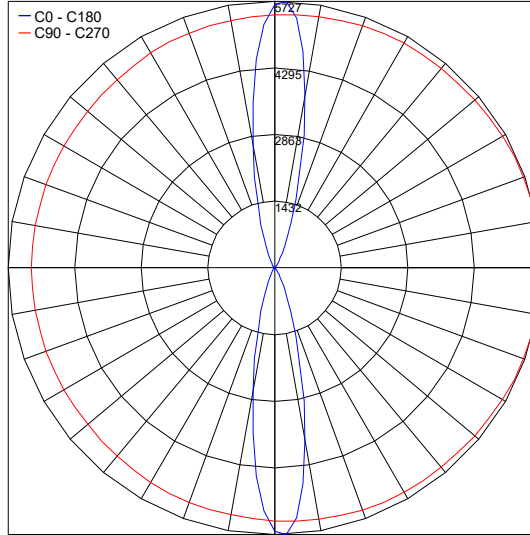

PHOTOMETRIC FILENAME : 401018 TECH MED 02 SQ PRO 2X14 30°.IES

Job Name/Date:

Fixture Type Designation: