


Fixed is a stainless steel, IP66-rated, wall mounted LED luminaire with clean lines and a compact design that is suitable for outdoor installation. It is available in mono or bi light emission, with one, two or three LEDs, and 3 standard Hard Coat Treatment finishes.



M Series - Mono Light Emission



B Series - Bi Light Emission



M Series Optics

B Series Optics

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	5W, 10W, 15W (FIXED M01, M02, M03) 2 X 5W, 10W, 15W (FIXED B01, B02, B03)
Power Supply	Remote (Consult Factory)
Dimming	On / Off Only
Construction	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	550 lm per beam (3000K)
Efficacy	110 lm/W per beam (3000K)
Optics	21°, 45°, 65°, Asymmetric, Road
BUG Rating	—
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	2.8" h x 2.4" w x 4.7", 6.3" or 7.9" l (M Series) 4.7" h x 2.4" w x 4.7", 6.3" x 7.9" l (B Series)
IP Rating	IP66
Impact Resistance	IK08

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION


Example: SPT4024034G.US. Power Supplies / Accessories sold separately.

				.US
Model No.	CCT	Optics	Finishes	
SPT40210 (M01)	2 - 2700K	2 - 21°	N - Inox Natural	.US
SPT40220 (M02)	3 - 3000K	4 - 45°	G - Inox Graphite	
SPT40230 (M03)	4 - 4000K	6 - 65°	B - Inox Bronze	
SPT40240 (B01)		7 - Asymmetrical		
SPT40250 (B02)		8 - Road Optics		
SPT40260 (B03)				



Job Name/Date:

Fixture Type Designation:



FIXTURE DIMENSIONS





FIXED M01





FIXED M02





FIXED M03




FIXED B01



FIXED B02



FIXED B03



FINISHES



Inox Natural



Inox Natural



Inox Natural



Inox Natural



Inox Natural



Inox Natural



Inox Graphite



Inox Graphite



Inox Graphite



Inox Graphite



Inox Graphite



Inox Graphite



Inox Bronze



Inox Bronze



Inox Bronze



Inox Bronze



Inox Bronze



Inox Bronze

FIXED B01

FIXED B02

FIXED B03

FIXED M01

FIXED M02


FIXED M03

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometric data is 3000K

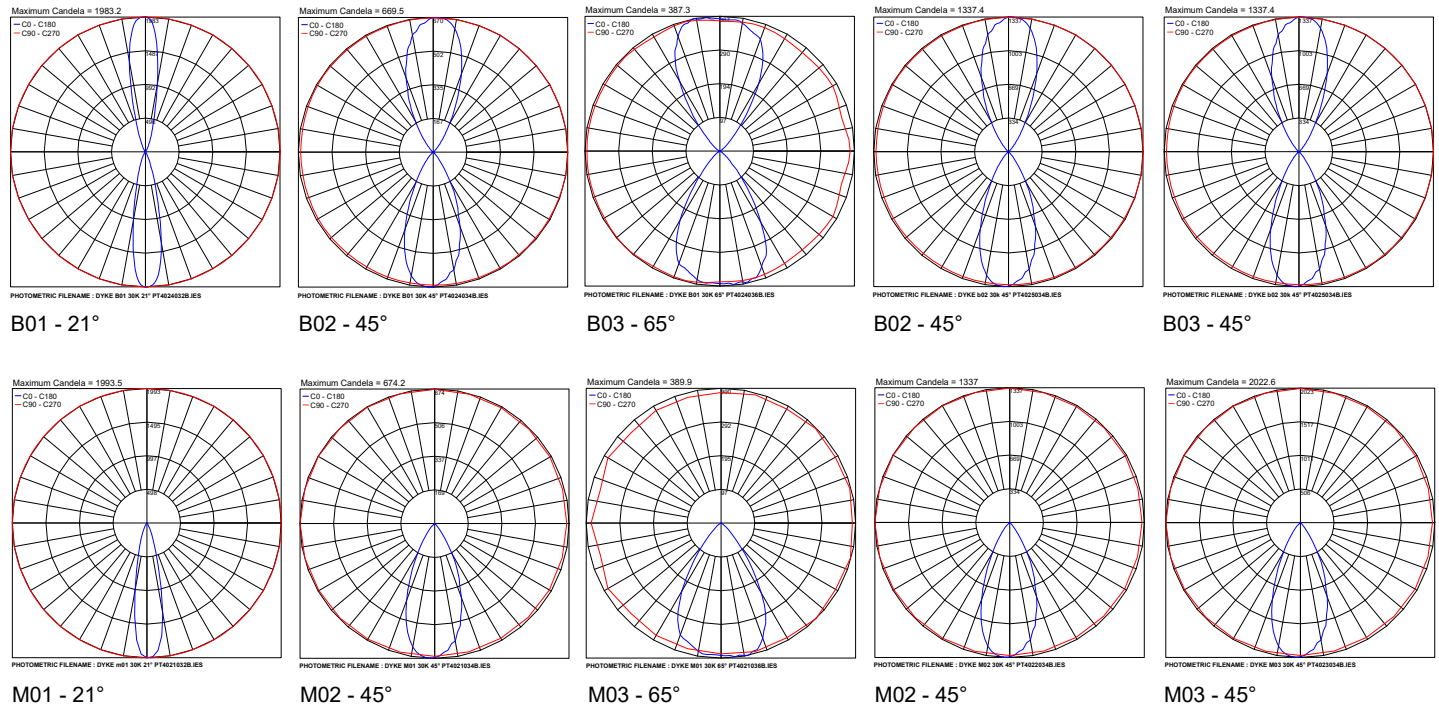

Job Name/Date:

Fixture Type Designation: