
CIELO MAXI HP


datasheet

Cielo Maxi is a 10.0” round, IP67-rated, recessed downlight available in 4 versions and suitable for outdoor installation. Cielo Maxi HP is a 34W version with 4 CREE XHP50.2 LED. Available in 3 color temperatures, 3 optic options with a stainless steel finish. Suitable for use in open structures.



Fixture Dimensions





HOLE FOR RECESS

TECHNICAL DATA

Wattage	34W
Power Supply	Integral 120VAC
Construction	Body: Die-cast Copper-free Aluminum Trim: Stainless steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28’
CCT	2700K, 3000K, 4000K
Delivered Lumens	3268 lm (28°, 3000K) 3296 lm (10°, 3000K) 3325 lm (4°, 3000K)
Efficacy	96.1 lm/W (28°, 3000K) 96.9 lm/W (10°, 3000K) 97.8 lm/W (4°, 3000K)
Optics	4°, 10°, 28°
Finishes	Stainless Steel
Fixture Dimensions	Ø10.0” x 10.5” h
Cutout Dimensions	Ø9.61”
Fixture Weight	12.6 lbs
LED Source	4 CREE XHP50.2 LED
IP Rating	IP67
IK Rating	IK10

ORDERING INFORMATION

Example: 701312P.27.4.SS. Accessories ordered separately.

701312P			.	**SS**
Model No.	**CCT**	**Optic**		**Finish**
701312P	**27** - 2700K **30** - 3000K **40** - 4000K	**4** - 4° **10** - 10° **28** - 28°		**SS** - Stainless Steel

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com
79 Trenton Avenue, Frenchtown NJ 08825
P: 908-996-7710
F: 908-996-7042
© Copyright 2024 Designplan Lighting, Inc.
Published: November 18, 2026

CIELO MAXI HP

datasheet


ACCESSORIES




AC119
Honeycomb Louver for Cielo Maxi

PHOTOMETRIC DATA


Note: All photometry is 3000K

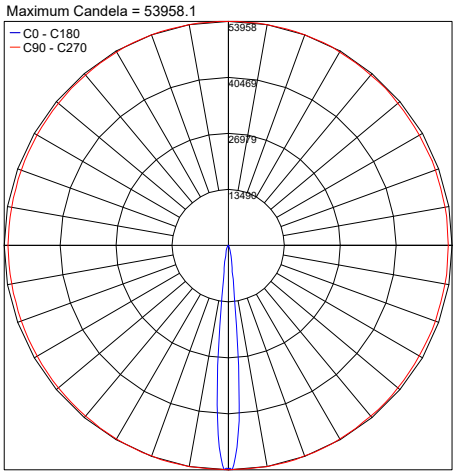

PHOTOMETRIC FILENAME : CIELO MAXI HP_701312_4°.IES

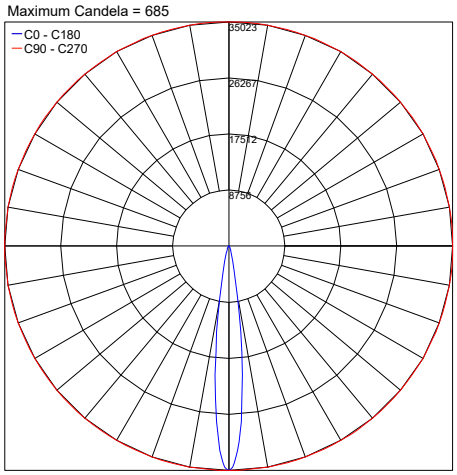

PHOTOMETRIC FILENAME : CIELO MAXI HP_701312_10°.IES

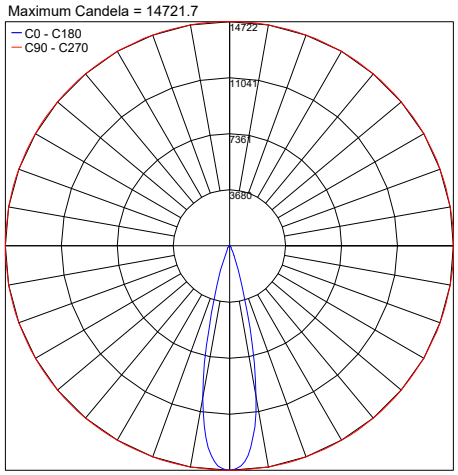

PHOTOMETRIC FILENAME : CIELO MAXI HP_701312_28°.IES

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2024 Designplan Lighting, Inc.

Published: November 18, 2026

P: 908-996-7710
F: 908-996-7042