

CIELO MINI DIFFUSED


Cielo Mini is a round, IP67-rated, recessed downlight available in 6 versions and suitable for outdoor installation. Cielo Mini Diffused is a 6W version with 16 x mid-power SAMSUNG 2835 LED. Available in 3 color temperatures, diffused optics and a stainless steel finish.



TECHNICAL DATA

Wattage	6W
Power Supply	Integral 120VAC
Construction	Body: Die-cast Copper-free Aluminum Trim: Stainless Steel AISI 316L Lens: Tempered, Safety Glass Cable Length: 3.28'
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U2-G0 (3000K)
Delivered Lumens	110 lm (3000K)
Efficacy	18.3 lm/W (3000K)
Optics	Diffused
Finishes	Stainless Steel
Fixture Dimensions	Ø6.06" x 8.03" h
Cutout Dimensions	Ø5.71"
Fixture Weight	5.29 lbs
LED Source	16 x mid-power SAMSUNG 2835 LED
IP Rating	IP67
IK Rating	IK10

Fixture Dimensions

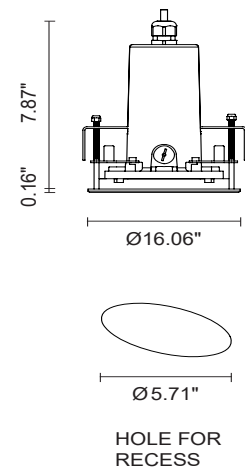

ORDERING INFORMATION

Example: 701304P.27.D.SS. Power Supplies ordered separately.

701304P		D	SS
Model No.	CCT	Optic	Finish
701304P	27 - 2700K 30 - 3000K 40 - 4000K	D - Diffuse	SS - Stainless Steel


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 5.3

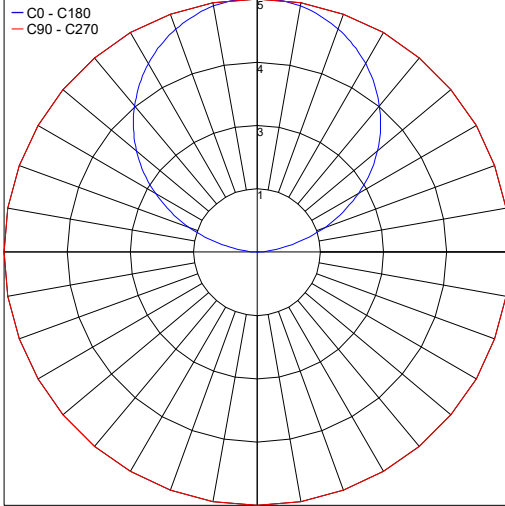

PHOTOMETRIC FILENAME : CIELO MINI DIFFUSE_701304.IES

Job Name/Date:

Fixture Type Designation: