


GENIUS BASIC SLOPE NAKED


The Genius Basic Slope Naked is a totally recessed indoor downlight (Ø0.79") providing surface integration in any context and material - wood, cement, mirror, marble - with an asymmetrical light emission hole with a 40° angled axis. It is available in 3000K as standard with a black finish.

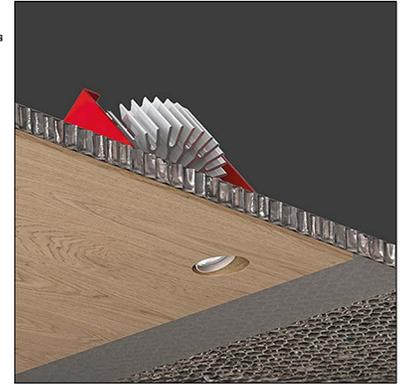

TECHNICAL DATA

Wattage / Input	4W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum, Steel Aluminum Heat Sink
CCT	3000 (2700K, 4000K on request)
CRI	>90
Delivered Lumens	185 lm (3000K)
Efficacy	46.3 lm/W
Optics	24°
Finishes	Black
Fixture Dimensions	3.15" l x 2.76" w x 2.76" h
Aperture	Ø0.79"
Fixture Weight	1.43 lbs
LED Source	1 COB LED Removable Cartridge
IP Rating	IP20

Fixture Dimensions:

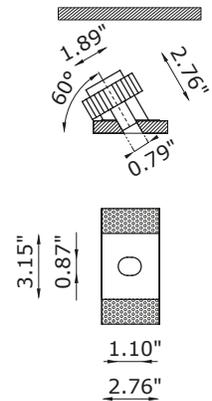

ORDERING INFORMATION

Example: BU1080.BL.4R24M.30.WD.US. Power Supplies ordered separately.

BU1080	BL	4R24M		WD.US
Model No.	Finish	Optic	CCT	
BU1080	BL - Black	4R24M - 24°	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	WD.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V Only)	120VAC to 500mA, 12W, Class 2	1-3
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA 20W, Class 2	1-5
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-8


Suggested Lutron Compatible Drivers

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 10W	2-2
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	3-4
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 27W	6-6


For other power supply options consult factory.

ACCESSORIES

Maintenance



C6916
LED Slug Removal Tool

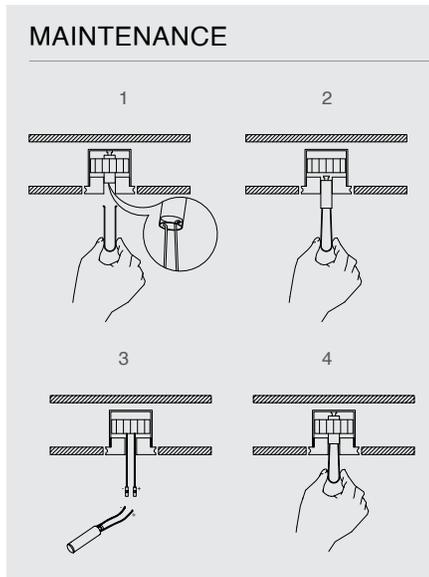

REPLACEMENT BULBS

Example: *MBGB2-L150-30.UL.US*

Model No.

MBGB2-L150-27.UL.US - Replacement Lamps - 2700K, 24°

MBGB2-L150-30.UL.US - Replacement Lamps - 3000K, 24°


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: Photometric data is 3000K

Maximum Candela = 840.3

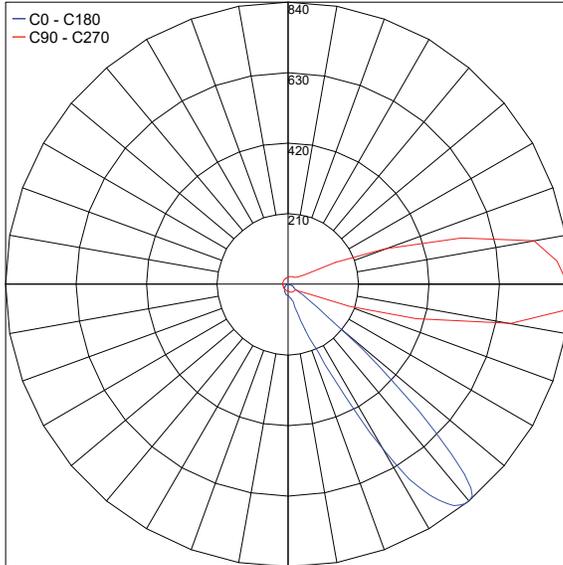

PHOTOMETRIC FILENAME : GENIUS BASIC SLOPE BU1865.00 500MA 3K.IES

Job Name/Date:

Fixture Type Designation: