


BIG IP20 is an indoor recessed wall luminaire and the larger brother of the original Normall. It features a minimalist design characterized by pure and simple lines. The curved back is optimized to create a great indirect lighting solution for a range of interiors.



Wall Cut-Out: 10.5" x 15.5"  
Fixture Dimensions

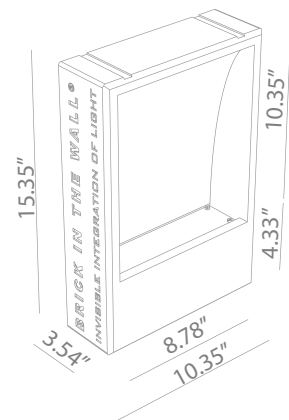

## TECHNICAL DATA

<b>Wattage / Input</b>	9.1W, 9.5W, 11.8W, 13.8W
<b>Power Supply</b>	Integral 120VAC and Remote 500mA (13.8W, 2000 lm version only)
<b>Construction</b>	Body: CALCYT® Plaster Lens: Tempered Glass
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, WarmDim
<b>CRI</b>	>80 (1500LM and 2000LM versions) >90 (1200LM and WarmDim versions)
<b>Optics</b>	Fixed
<b>Delivered Lumens</b>	1100 - 1600 lm
<b>Finishes</b>	Paintable Plaster
<b>Cut-Out Dimensions</b>	10.55" x 15.55"
<b>Fixture Dimensions</b>	10.35" w x 3.54" l x 15.35" h
<b>Color Consistency</b>	2-Step MacAdam, 4-Step MacAdam (WarmDim)
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

*Example: 104 73 100. Accessories ordered separately.*

--

Model No.	Description
104 72 000 - 2700K (9.1W, 1200 lm, CRI 90)	Integral Phase Dim
104 72 100 - 3000K (9.1W, 1200 lm, CRI 90)	Integral Phase Dim
104 72 500 - 2200K (9.1W, 1200 lm, CRI 90)	Integral Phase Dim
104 62 000 - 2700K (9.1W, 1200 lm, CRI 90)	Integral 0-10V Dim
104 62 100 - 3000K (9.1W, 1200 lm, CRI 90)	Integral 0-10V Dim
104 62 500 - 2200K (9.1W, 1200 lm, CRI 90)	Integral 0-10V Dim
104 73 000 - 2700K (9.5W, 1500 lm, CRI 80)	Integral Phase Dim
104 73 100 - 3000K (9.5W, 1500 lm, CRI 80)	Integral Phase Dim
104 73 200 - 4000K (9.5W, 1500 lm, CRI 80)	Integral Phase Dim
104 63 000 - 2700K (9.5W, 1500 lm, CRI 80)	Integral 0-10V Dim
104 63 100 - 3000K (9.5W, 1500 lm, CRI 80)	Integral 0-10V Dim
104 63 200 - 4000K (9.5W, 1500 lm, CRI 80)	Integral 0-10V Dim

Job Name/Date:

--

Model No.	Description
104 73 600 - WarmDim (11.8W, 900 lm, CRI 90)	Integral Phase Dim
104 63 600 - WarmDim (11.8W, 900 lm, CRI 90)	Integral 0-10V Dim
104 27 000 - 2700K (13.8W, 2000 lm, CRI 80)	Remote 500mA
104 27 100 - 3000K (13.8W, 2000 lm, CRI 80)	Remote 500mA
104 27 200 - 4000K (13.8W, 2000 lm, CRI 80)	Remote 500mA
104 64 000 - 2700K (13.8W, 2000 lm, CRI 80)	Integral 0-10V Dim
104 64 100 - 3000K (13.8W, 2000 lm, CRI 80)	Integral 0-10V Dim
104 64 200 - 4000K (13.8W, 2000 lm, CRI 80)	Integral 0-10V Dim

**For remote 500mA driver options - see page 2.**

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA - 13.8W, 2000 LM version


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2	1-1
<a href="#">PPLT00527</a>	Phase Dim (120V only)	120VAC to 500mA, 20W, Class 2	1-1
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2	1-1
<a href="#">PPLT00262</a>	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible - 13.8W, 2000 LM version

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1

For other power supply options consult factory.

## REQUIRED ACCESSORIES - Installation

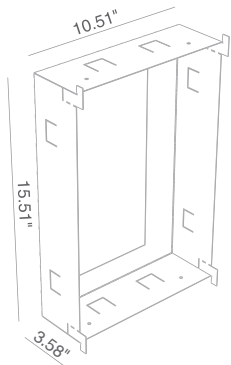

**704 01 000**  
Outer Casing


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 428.4

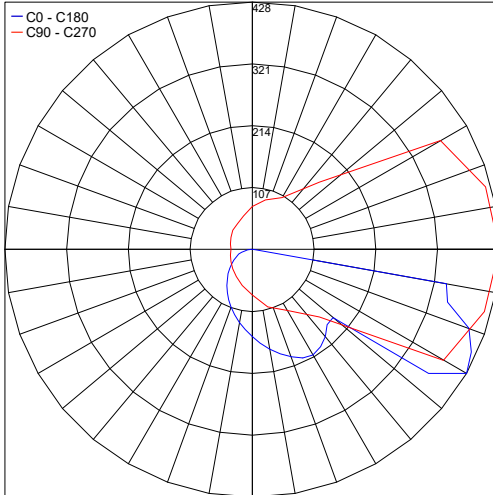


PHOTOMETRIC FILENAME : BIG LED (1200LM, CR190).IES

Maximum Candela = 633.9

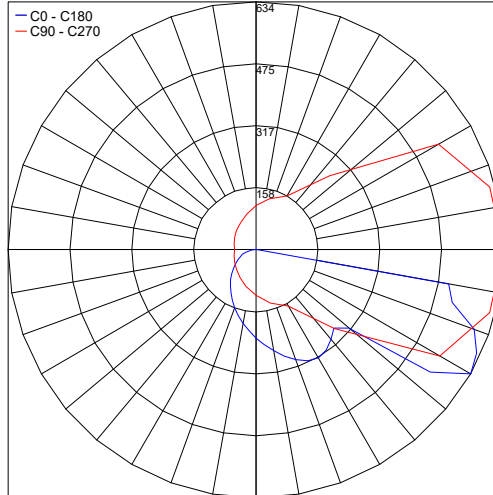

PHOTOMETRIC FILENAME : BIG LED (1500LM, CR190).IES

Maximum Candela = 223.9

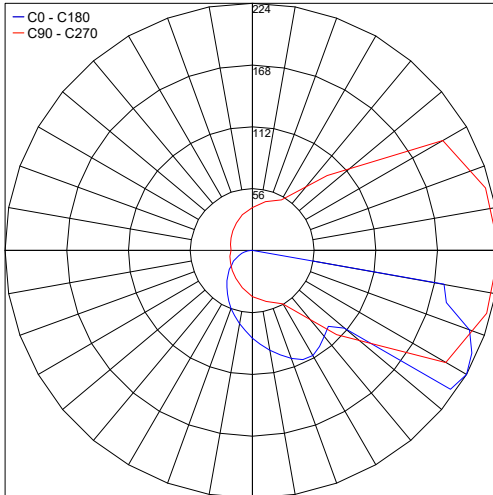

PHOTOMETRIC FILENAME : BIG WARM DIM (900LM, CR190).IES

Job Name/Date:

Fixture Type Designation: