

DIVAR ROOF


Divar Roof is an IP65 rated, surface mounted, LED luminaire that is suitable for installation on ceilings. It is available in 4 optics options and 5 standard finishes. Also available in a wall mounted version - Divar Wall.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 15.4W, 7.2W (diffuse version) |
| Power Supply | Integral 120VAC |
| Construction | Body/Base: Aluminum Lens: Transparent or Sandblasted Glass |
| CCT | 2700K, 3000K |
| CRI | >80 |
| BUG RATING | B2-U1-G0 (19°, 32°, 3000K) B1-U1-G0 (65°, 3000K) B0-U1-G0 (Diffuse, 3000K) |
| Delivered Lumens | 1177 lm (32°, 3000K) 527 lm (Diffuse, 3000K) |
| Efficacy | 76.4 lm/W (32°, 3000K) 73.2 lm/W (Diffuse, 3000K) |
| Optics | 19°, 32°, 65°, Diffuse |
| LED Source | Power LED or Mid Power LED (diffuse version) |
| Finishes | 5 Standard, See Below |
| Fixture Dimensions | 7.76" l x 2.76" w x 4.33" h |
| IP Rating | IP65 |
| Impact Resistance | IK06 |

Fixture Dimensions

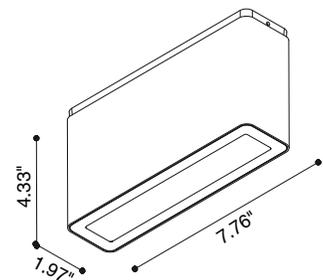

ORDERING INFORMATION

Example: D901011073.US

| D9010 | | | | US |
|-----------|--------------------------|---|---|----|
| Model No. | CCT | Optics | Finish | |
| D9010 | 31 - 2700K 11 - 3000K | 04 - 19° 06 - 32° 07 - 65° 05 - Diffuse (7.2W) | 2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten | US |

Job Name/Date:

Fixture Type Designation:

FINISHES



white



sand



graphite



aluminum




corten

PHOTOMETRIC DATA

Note: all photometry is 3000K

19°


Maximum Candela = 6313.6

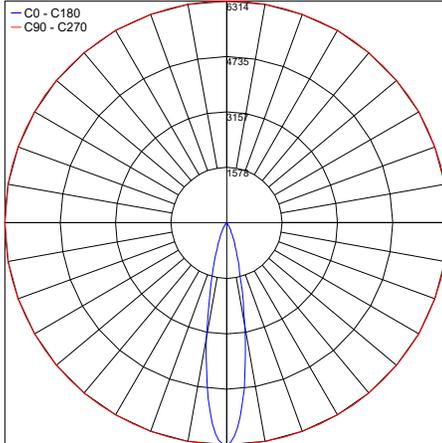

PHOTOMETRIC FILENAME : DIVAR ROOF 19°_3000K.IES

32°


Maximum Candela = 4140.9

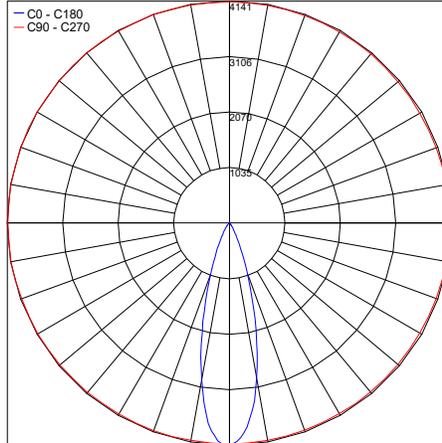

PHOTOMETRIC FILENAME : DIVAR ROOF 32°_3000K.IES

65°


Maximum Candela = 1607.3

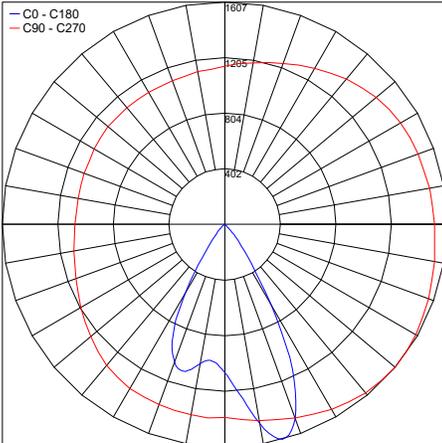

PHOTOMETRIC FILENAME : DIVAR ROOF 65°_3000K.IES

Diffuse

Maximum Candela = 234.0

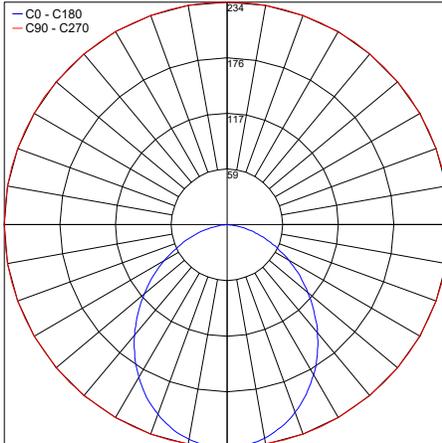

PHOTOMETRIC FILENAME : DIVAR ROOF DIFFUSE_3000K.IES

Job Name/Date:

Fixture Type Designation: