


Dry is a totally disappearing recessed flangeless luminaire made of AirCoral® suitable for installation on walls. It is available in 3000K standard with a 40° optic and can be set up with a 45° or 90° light beam inclination.



TECHNICAL DATA

Wattage / Input	9W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral® Lens: Frosted Glass
CCT	3000K 2700K, 4000K on request
CRI	>90
Delivered Lumens	557 lm (3000K)
Efficacy	61.8 lm/W
Optics	40°
Finishes	AirCoral®
LED Source	Professional COB LED
Fixture Dimensions	7.48" l x 2.76" w x 9.65" h
Cut-out Dimension	7.68" x 7.28"
Aperature	3.15" x 3.15"
Fixture Weight	3.31 lbs
IP Rating	IP40

Fixture Dimensions

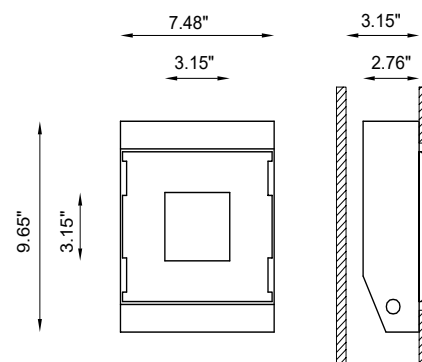

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

ORDERING INFORMATION

Example: BU6113.Z.40.AC.US. Power Supplies ordered separately.

BU6113.Z		AC	US
Model No.	CCT	Finish	
BU6113.Z	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00211	Non-Dim	120VAC to 350mA, 10W, Class 2	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-3

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 685

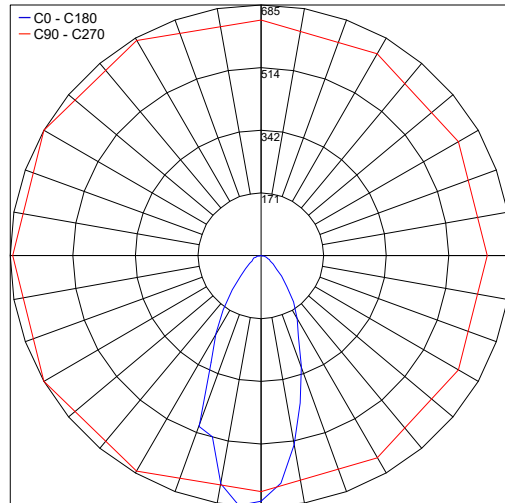

Job Name/Date:

Fixture Type Designation: