

# EYES 1.6


The Eyes 1.6 is a miniscule indoor recessed downlight available in blue or white light with 5 standard finishes and 2 optical options.



## TECHNICAL DATA

<b>Wattage / Input</b>	1W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anodized Aluminum Alloy EN AW 6026 Trim: Brass Cable Length: 4.9' standard
<b>CCT</b>	2700K, 3000K, 4000K, 5000K, Blue
<b>CRI</b>	CRI >80
<b>Delivered Lumens</b>	54 lm (3000K, 40°)
<b>Efficacy</b>	54 lm/W
<b>Optics</b>	40°, Diffuse
<b>Finishes</b>	5 Standard, Custom RAL (see below)
<b>Cut-Out Dimensions</b>	Ø0.71"
<b>Fixture Dimensions</b>	Ø0.98" x 1.18" h
<b>Fixture Weight</b>	0.18 lbs
<b>LED Source</b>	1 Power LED
<b>Lumen Maintenance</b>	L90, B10>50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	32°F to +113°F
<b>IP Rating</b>	IP40

Ceiling Cut-Out: Ø 0.71"  
Fixture Dimensions

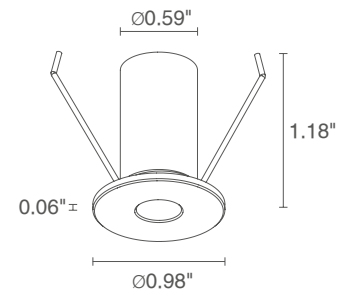

## ORDERING INFORMATION

Example: EY16115FD. Power Supplies ordered separately.

EY1611			
Model No.	CCT	Optics	Finish
EY1611	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue	F - 40° D - Diffuse	B - White C - Chrome D - Gold S - Satin N - Black CR - Custom RAL (Consult factory for "CR")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00128</a>	Non-Dim	120VAC to 24VDC, 6W, Class 2	1-4
<a href="#">PPLT00275</a>	Non-Dim	120-277VAC to 24VDC, 12W, Class 2	1-9
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-9
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2	1-20
<a href="#">PPLT00709</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-76
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	10-80

For other power supply options consult factory.


## PHOTOMETRIC DATA

Note all Photometry is 3000K

### D - Diffuse

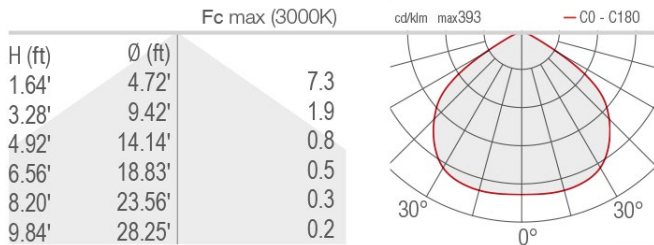

### F - 40°

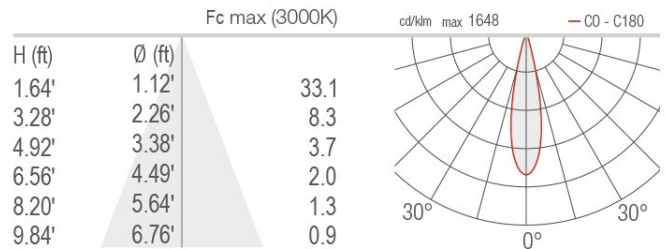

Job Name/Date:

Fixture Type Designation: