

Fatz is the newest and largest of the “Slim” LED pendant series. It is available in static and tunable white with 4 different finish options. It can be integrated seamlessly into office, residential and commercial environments. Continuous runs available.



**MADE IN THE U.S.A.**

Fixture Dimensions  
1.125" w x 6.0" h x 48.0" l  
**See full drawing on page 2**

## TECHNICAL DATA

<b>Wattage / Input</b>	82W (120-277V)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body: Extruded Aluminum
<b>CCT</b>	2700K, 3000K, 3500K, 4000K Tunable White: 2700K-5000K
<b>CRI</b>	CRI>90
<b>Delivered Lumens</b>	6290 lm (3000K) Up: 3616 lm / Down: 2674 lm
<b>Efficacy</b>	77 lm/W
<b>Optics</b>	50% Linear Indirect / 50% Diffused Direct (Static White)
<b>Finishes</b>	4 Standard, See Below
<b>Fixture Dimensions</b>	1.125" w x 6.0" h x 48" l
<b>LED Source</b>	Mid Power LEDs
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

*Example: F10-L-4-TW-P-10-C-RC. Accessories ordered separately - see page 2.*


F10-L	-	4	-		-	P	-		-	C	-	
-------	---	---	---	--	---	---	---	--	---	---	---	--

Model #	Length	CCT	Body	Finish	Driver	Canopy Options
F10-L	4 - 4 foot	27 -2700K 30 -3000K 35 -3500K 40 -4000K TW - Tunable White	P - Pendant	02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	C - 120-277V 0-10V Diming Integral Driver	RC - Recessed Canopy, Same Finish as Fixture SC - Surface Canopy, Same Finish as Fixture RW - Recessed Canopy, White Finish SW - Surface Canopy, White Finish

Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS

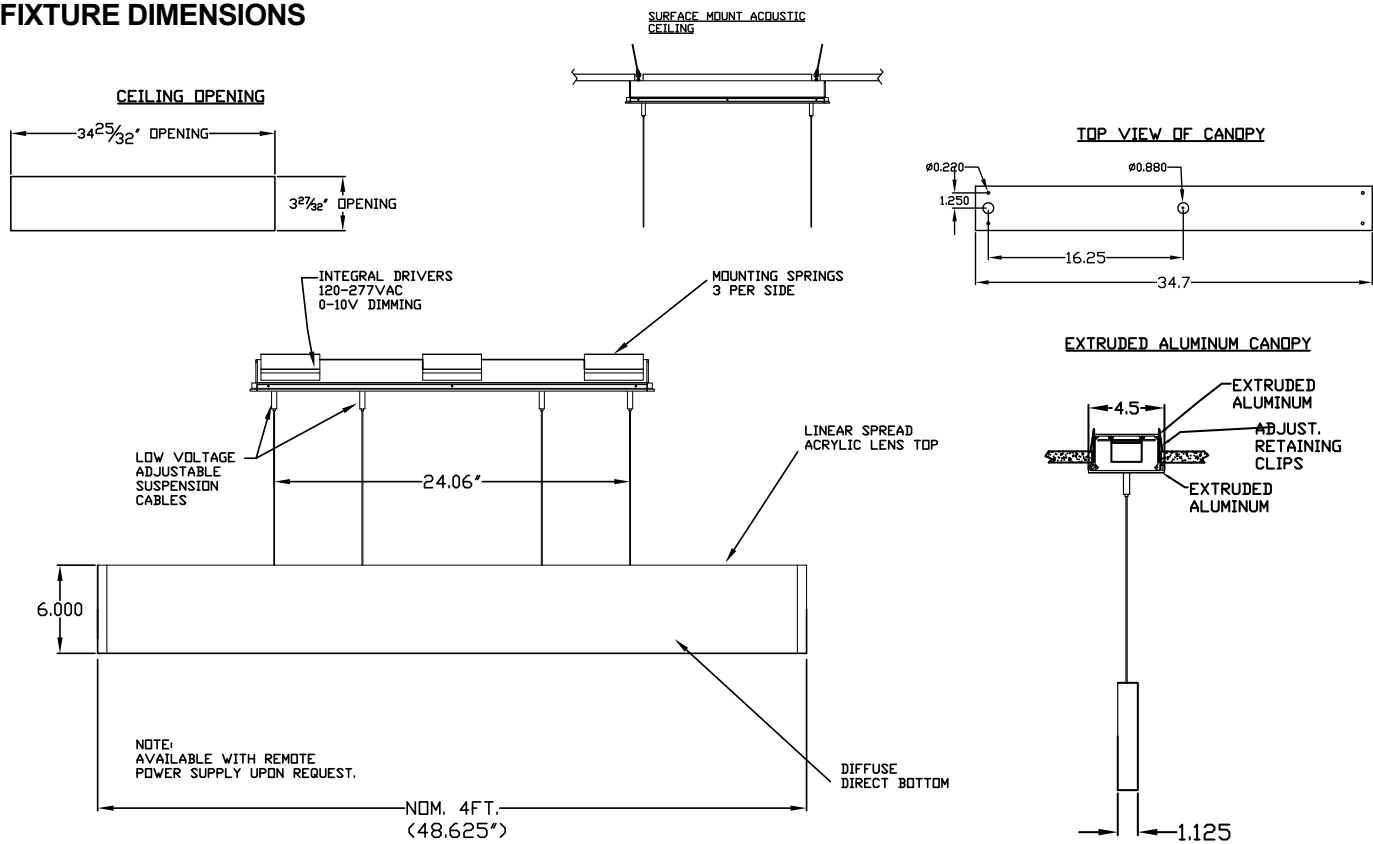

## ACCESSORIES (CONNECTORS)

PART NUMBER	DESCRIPTION	FINISH
F10-C18020201	180° Connector	BLACK SUEDE
F10-C18020401	180° Connector	BRONZE
F10-C18021001	180° Connector	MATTE SILVER
F10-C18021101	180° Connector	WHITE SUEDE


Job Name/Date:

Fixture Type Designation:

**PHOTOMETRIC DATA**

Note all Photometry 3000K

Maximum Candela = 1651

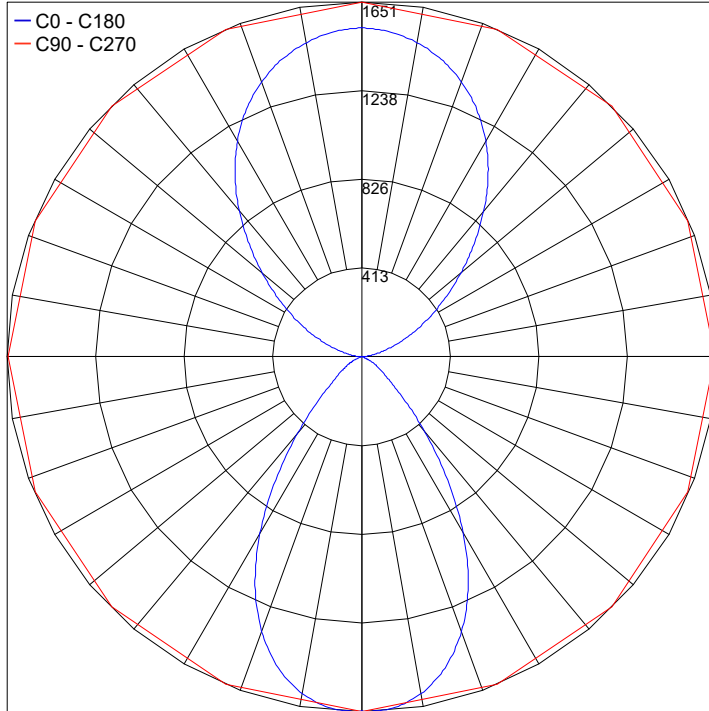

PHOTOMETRIC FILENAME : FATZ 30K RECESSED CANOPY - LLIA001665-001.IES

Job Name/Date:

Fixture Type Designation: