

FLASH MEDIUM COB


Flash are a family of round floodlights for outdoor installation on a façade or wall. It is available in a medium, maxi or mega version with various optics and 3 standard finishes.



TECHNICAL DATA

Wattage / Input	18W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28'
CCT	3000K, 4000K
BUG Rating	B0-U3-G3
Delivered Lumens	972 lm (3000K)
Efficacy	54 lm/W (3000K)
Optics	35°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø5.51" x 9.53"
Fixture Weight	5.7 lbs
LED Source	1 CREE CXA 1512 COB LED
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions:

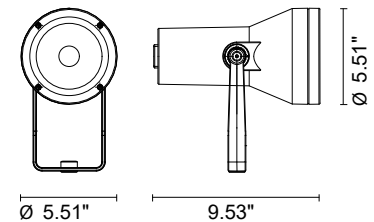

ORDERING INFORMATION

Example: 101102P-30K-35-MB

101102P	-		-	35	-	
Model No.	CCT	Optics	Finish			
101102P	30K - 3000K 40K - 4000K	35 - 35°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare



AC-026P-xx

Anti-Glare Visor - For Flash Medium version

Include one of the below finishes:


TG - Textured Gray

AG - Anthracite Gray

MB - Matte Black (on request)

PHOTOMETRIC DATA

Maximum Candela = 7700.13

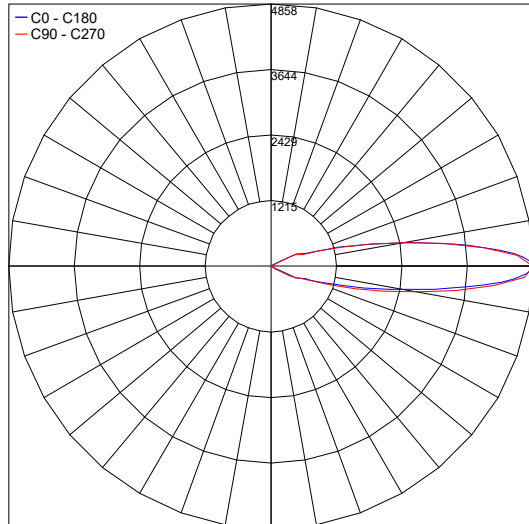

Job Name/Date:

Fixture Type Designation: