


GENIUS IP65


1000 lm IN JUST 0.94 in
EASY MAINTENANCE

Private Villa, Austria | ASZ Architetti | ph. SUPERFUTUREDESIGN*



Outdoor Recessed

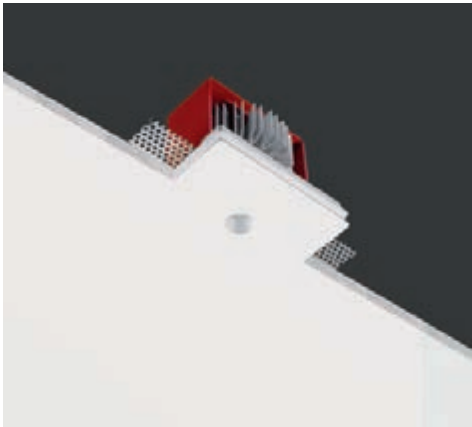

Genius IP65



OPTIONAL
Honeycomb: anti-glare screen
for proper light directionally.



OTHER AVAILABLE CODES

BU1951.CW 4 24 M WD	<i>lens</i>	24°
	<i>light color</i>	
	27	2700K
	30	3000K
BU1951.27.CW	40	4000K (on request)
	<i>lens</i>	40°
	<i>light color</i>	2700K
BU1951.40.CW	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)

example of code
composition

BU1952.CW 4 R 40 M 30 WD

TECHNICAL FEATURES

Code	BU1951.CW
Type	Downlight 90°
	
Material	CW: Coral WaterOut® waterproof
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP65
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.31 × 4.33 in
Lamp type	LED 700 mA
	AC/DC Vf: 11.5 VDC
Lamp wattage	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 0.94 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request).
	Other available beams: 24°.

OPTIONAL

Brick box	cod. BR1951LT	cod. BR1952LT
Honeycomb screen	-	-



GENIUS
see page 94

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

designplan® 

