

The
Magic
Of
Light.

i-lantern

design by Landa R&D




designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

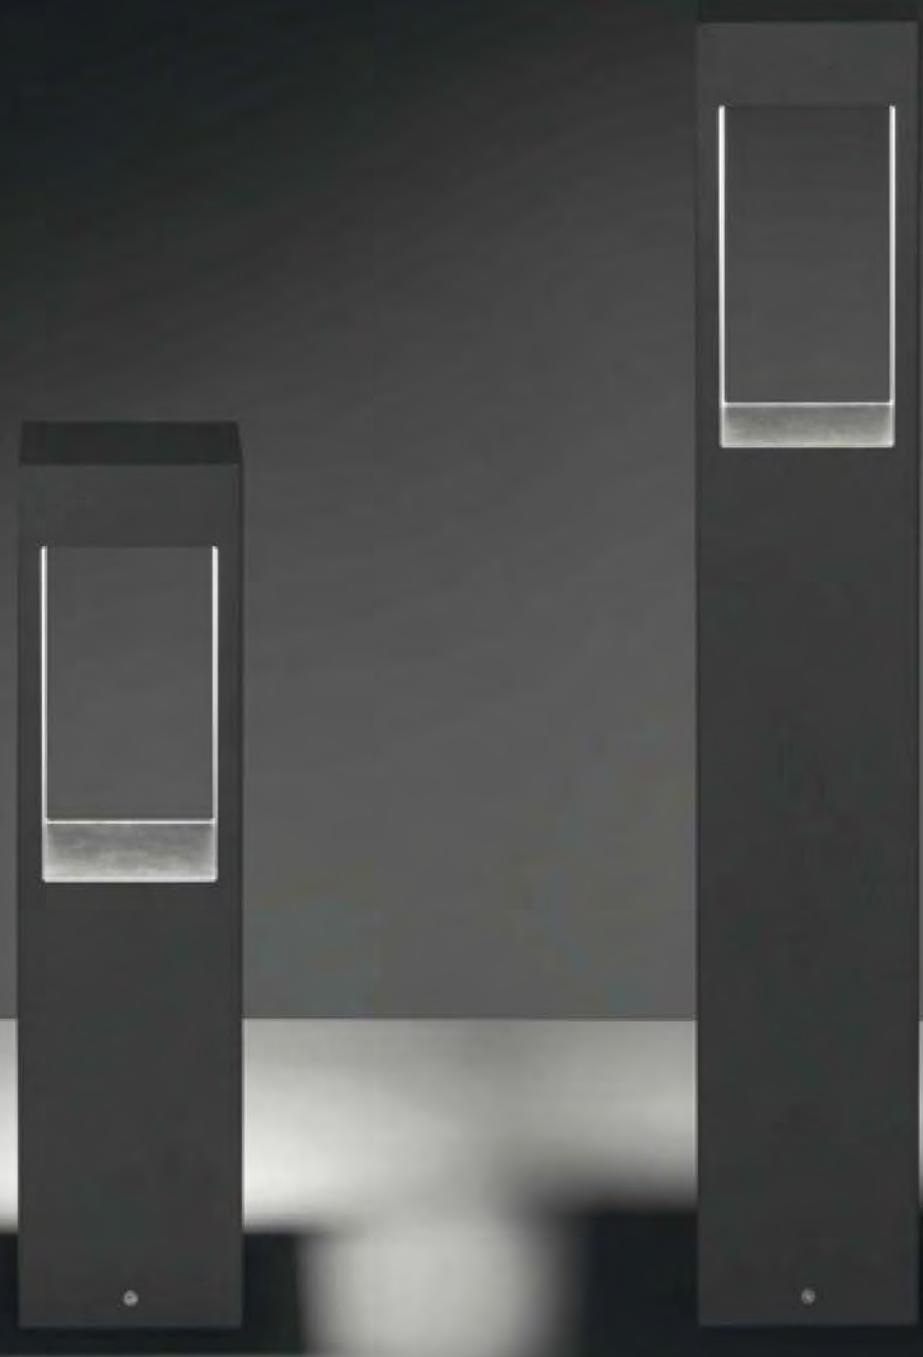

i-lantern

A luminaire with a powerful 10W heart and diffused light beam. The diffuser in opal polycarbonate offers an optimal, performing and never invasive light.

I-Lantern can also be installed using a stake; the product is perfect for driveways in private and public contexts.

The body of I-Lantern is made in EN-AW6060 extruded aluminum in combination with the elements obtained through EN47100 die-casting process.

Customizable in four colors and is available in three different heights.

I-LANTERN | WALL LAMP

I-LANTERN | POLE

I-LANTERN | GARDEN LAMP





i-lantern



10W

DIFFUSE


TECHNICAL SPECIFICATIONS



DIFFUSE	
Source lamp	LED 10W
Total wattage	12.5W
Voltage	120-277VAC, 50-60 Hz
Control	0-10V Dimming
Light color	3000K
Luminous flux *Source flux	600 lm (1360 lm*)
Luminous efficacy	48 lm/W
McADAM steps	3
Beam	diffuse
CRI	> 90
Life time	L70 > 50,000 h Ta 40°C
IP rating	IP65
IK rating	IK08



5.91"



MATERIALS

Body	Die-cast aluminum EN47100 and extruded aluminum EN-AW6060
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

ORDER CODE

LN 7 0	D	H	B	B	Z	Finishing
						L Graphite
						V Oxide
						U White
						G Black
						035 13.78"
						060 23.62"
						090 35.43"
Example		LN 7 0 035 D H B B Z L				

AVAILABLE ACCESSORIES

Code	Description
LN00ALN	Root mounting kit
LN00ALN.01P	Anchor bolt

