

The Magic Of Light.

i-lantern

design by Landa R&D

designplan[®] 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



i-lantern

I-Lantern is characterized by a strong personality, a direction of light with a diffuse light beam and a 10W powerful heart, perfect for wall applications. An aesthetic fusion lives in parallel with a minimal design in order to be declined in many possible outdoor installations. Composed of a structural framework in extruded aluminum, I-Lantern is a luminaire with the possibility to be managed and dimmed via Bluetooth on request. I-Lantern lights the outdoors of private spaces and beyond.

I-LANTERN | BOLLARD
I-LANTERN | POLE
I-LANTERN | GARDEN LAMP





i-lantern


DIFFUSE

10W




TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 10W
Total wattage	12.5W
Voltage	120-277VAC, 50-60 Hz
Control	0-10V Dimming
Light color	3000K
Luminous flux	700 lm (1360 lm*)
*Source flux	
Luminous efficacy	56 lm/W
McADAM steps	3
Beam	diffuse
CRI	> 90
Life time	L70 > 50,000 h Ta 40°C
IP rating	IP65
IK rating	IK08

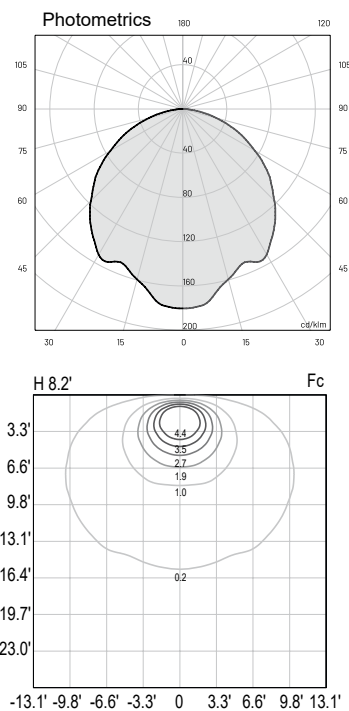

MATERIALS

Body	Die-cast aluminum EN47100 and extruded aluminum EN-AW6060
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

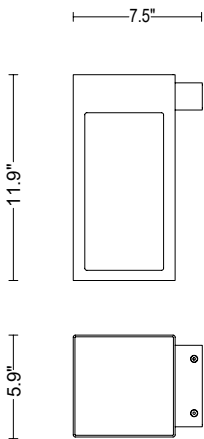

ORDER CODE

LN 7 0 PAR D H B B Z _		
	Finishing	
L	Graphite	
V	Oxide	
U	White	
G	Black	
	Example	
LN 7 0 PAR D H B B Z L		

