


# INTONO 3.1


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.



## TECHNICAL DATA

<b>Wattage / Input</b>	10W (120VAC)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body: Die-Cast Aluminum Fixing Bracket: Stainless Steel AISI 316L Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>Delivered Lumens</b>	837 lm (3000K, 15°, CRI 80) 696 lm (3000K, 15°, CRI 90)
<b>Efficacy</b>	83.7 lm/W (3000K, 15°, CRI 80) 69.6 lm/W (3000K, 15°, CRI 90)
<b>Optics</b>	6 Standard, see below
<b>Finishes</b>	5 Standard, see below
<b>Fixture Dimensions</b>	3.15" w x 4.76" l x 9.45" h
<b>Fixture Weight</b>	4.85 lbs
<b>LED Source</b>	1 COB High Density LED
<b>Lumen Maintenance</b>	L95, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	2-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK04

Fixture Dimensions

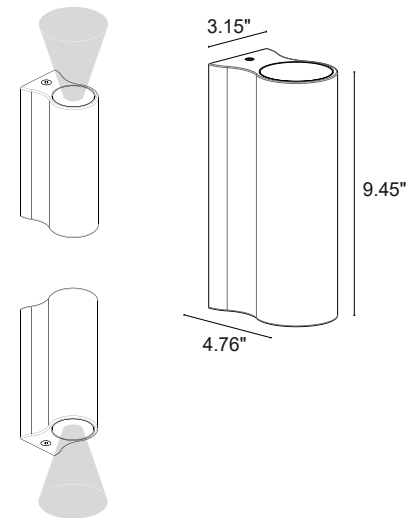

**Note:** 3.1, 3.2, 3.9, 4.1, 4.2 and 4.9 models to be mounted to the wall over a single gang switch box.

## ORDERING INFORMATION

Example: NT31100R01F0ZT.


NT3110						
Model No.	CRI	Control	Honeycomb Louvre	CCT	Optics	Finish
NT3110	0 - CRI 80 1 - CRI>90	0 - on/off R - 0-10V	00 - None 01 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with sharp 17° (Z), wall grazing (W) and asymmetrical (A) optics.</i>	F - 2700K 5 - 3000K 9 - 4000K	0Z - Sharp 17° 0S - 15° 0M - 20° 0L - 43° 0W - Wall Grazing 0A - Asymmetrical	E - White F - Gray H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Anti-glare



#### Honeycomb Louvre\*


\*Optical accessory added in ordering matrix

The honeycomb louvre can be provided on all optics, **EXCEPT** for sharp 17° (Z), wall grazing (W) and asymmetrical (A) optics for Intono 3.1.


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### Z - Asymmetrical 11° CRI 80

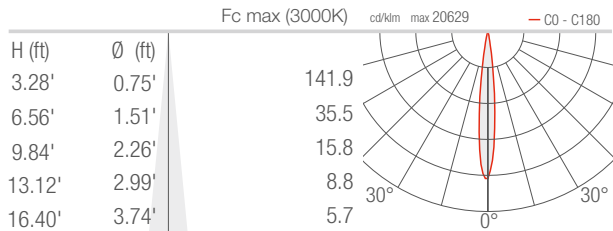


### S - 15° CRI 80

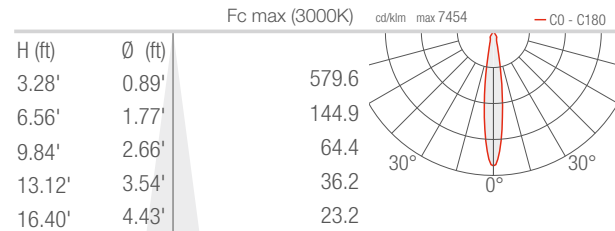


### M - 20° CRI 80

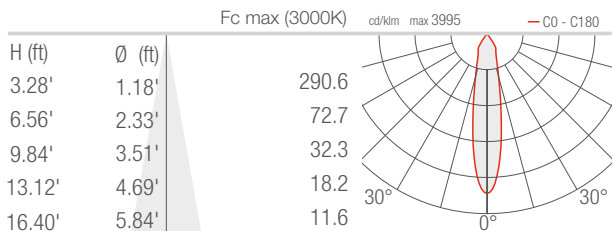


### L - 43° CRI 80

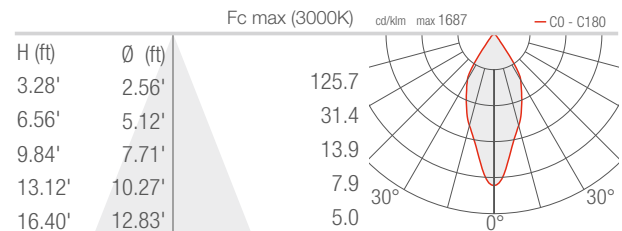

### W - Wall grazing CRI 80

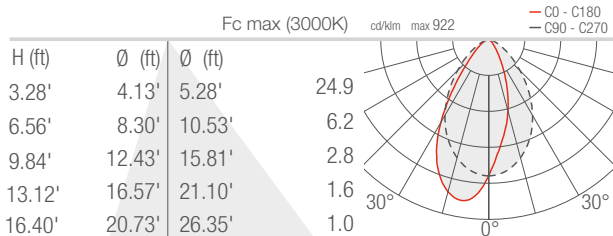

### A - Asymmetrical CRI 80

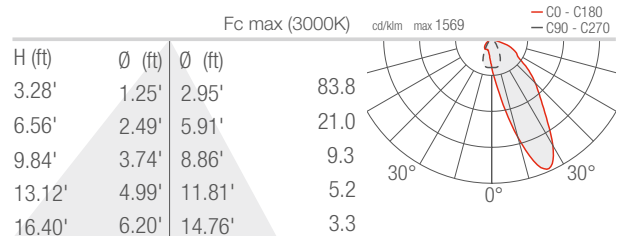

Job Name/Date:

Fixture Type Designation: