



Linear are a series of bollards for outdoor use, available in different heights and ideal for gardens and small paths. Linear 2 features 1, 2, 3 and 4 beam options, asymmetric optics, and 3 standard finishes.

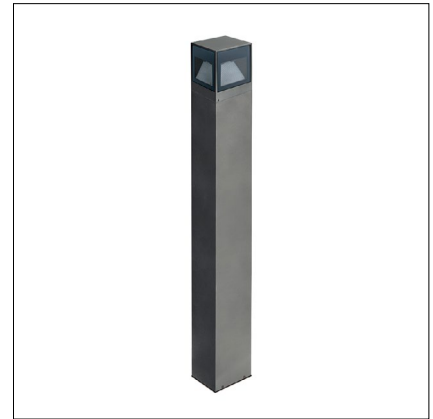

TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 10W (120VAC) |
| Power Supply | Integral |
| Construction | Body: Aluminum alloy EN AW 6060 Lens: Serigraphed, transparent and tempered extra-clear glass |
| CCT | 2700K, 3000K, 4000K |
| CRI | >80 |
| BUG Rating | B0-U1-G0 |
| Delivered Lumens | 100 lm per beam (3000K) |
| Efficacy | 10 lm/W per beam (3000K) |
| Optics | Asymmetrical |
| Finishes | 3 Standard, Custom RAL (see below) |
| Fixture Dimensions | 3.94" l x 3.94" w x 4.72" / 9.84" / 23.62" / 31.50" h |
| Fixture Weight | 3.53 lbs, 4.41 lbs, 5.95 lbs, 6.83 lbs |
| LED Source | 3 Power LEDs |
| Lumen Maintenance | L90, B10 >50,000hrs (Ta 25°C) |
| Color Consistency | 1/4 ANSI BIN |
| Operating Temp. | -4°F to +113°F |
| IP Rating | IP65 |
| IK Rating | IK07 |

Fixture Dimensions

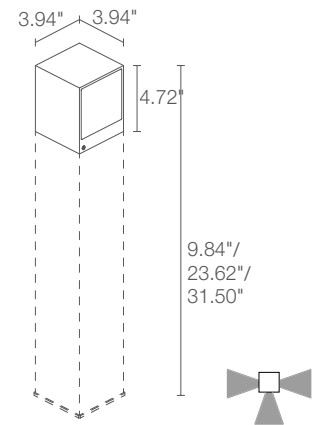

ORDERING INFORMATION



Example: CL23105AF. Accessories ordered separately.

| CL2310 | | A | |
|-----------|-------------------------------------|------------------|---|
| Model No. | CCT | Optics | Finish |
| CL2310 | F - 2700K 5 - 3000K 9 - 4000K | A - Asymmetrical | F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C") |

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Installation

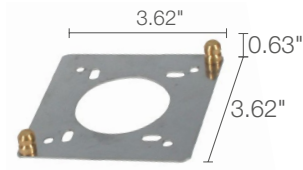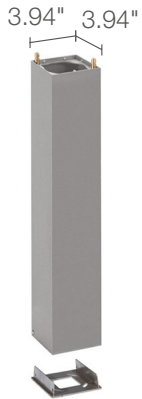

WT000000
Plate for ground
installation

WT20 _____

Column

For column include one of the below
heights then choose a finish:

- 250** - 9.84" **F** - Gray
- 600** - 23.62" **H** - Anthracite
- 800** - 31.50" **T** - Corten




Job Name/Date:

Fixture Type Designation:



PHOTOMETRIC DATA

Note all Photometry is 3000K, per beam



A - Asymmetrical

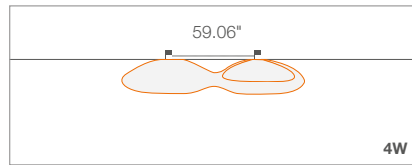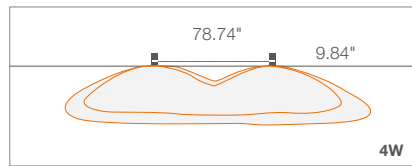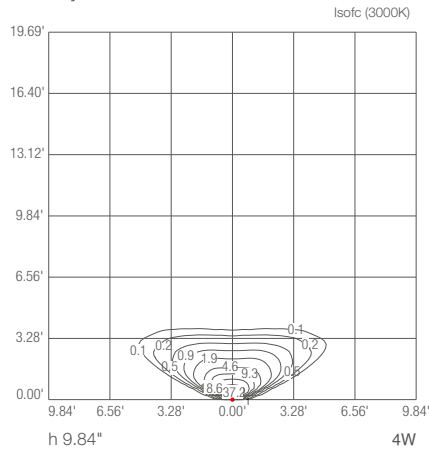

A - Asymmetrical

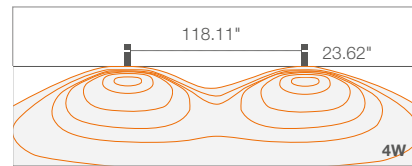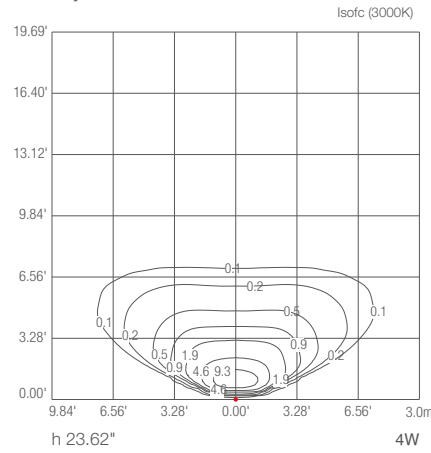

A - Asymmetrical

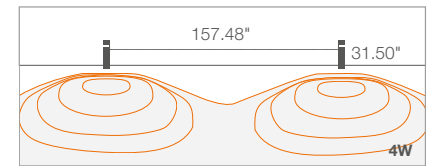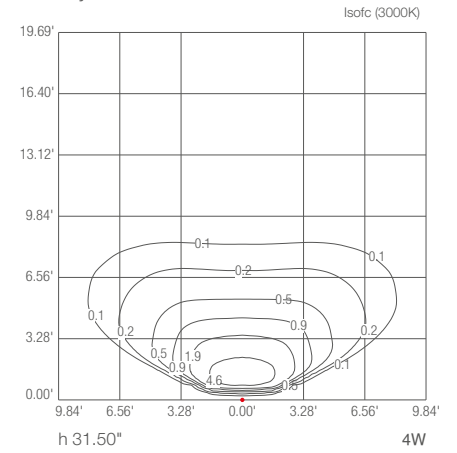

Job Name/Date:

Fixture Type Designation: