

# MIRÒN 24


Miròn is an IP65-rated adjustable outdoor floodlight for installation on walls, solid surfaces, or poles. There are 2 sizes - Miròn 16, the smaller with 16 LEDs, and Miròn 24, the larger with 24 LEDs. Miròn is adjustable -20° to +90° and is available in 2 color temps, 5 finishes and 4 optical options. Fixture wires to remote junction box (provided by others).



## TECHNICAL DATA

<b>Wattage / Input</b>	40.2W (120VAC)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Tempered, Transparent Glass
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B3-U1-G0 (50°, 3000K)
<b>Delivered Lumens</b>	4805 lm (50°, 3000K) 4330 lm (street, 3000K)
<b>Efficacy</b>	119.5 lm/W (50°, 3000K) 107.7 lm/W (street, 3000K)
<b>Optics</b>	30°, 50°, Asymmetric, Street
<b>LED Source</b>	24 Power LEDs
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	12.60" l x 7.48" w x 2.56" h
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK07

Fixture Dimensions

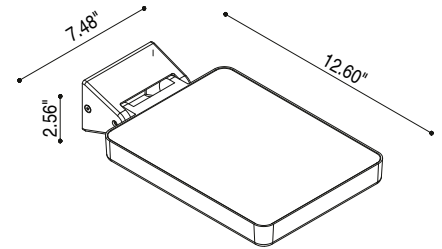

Fixture wires to remote junction box (provided by others)

## ORDERING INFORMATION

Example: D900521054.US Accessories sold separately, see page 2

D9005				US
Model No.	CCT	Optics	Finish	
D9005	310 - 2700K 110 - 3000K	5 - 30° 6 - 50° 7 - Asymmetric 8 - Street	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES



Bracket  
 Ø2.99" L 5.91"  
**D90214** - Graphite  
**D90215** - Aluminum




Double Bracket  
 Ø2.99" L 5.91"  
**D90234** - Graphite  
**D90235** - Aluminum




Bracket  
 Ø2.99" L 15.75"  
**D90224** - Graphite  
**D90225** - Aluminum



Double Bracket  
 Ø2.99" L 15.75"  
**D90244** - Graphite  
**D90245** - Aluminum







Mounting Plate  
**INCLUDED**

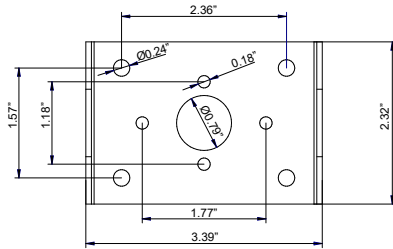

Pole Connector  
 Ø2.36"  
**D90255** - Aluminum

## PHOTOMETRIC DATA

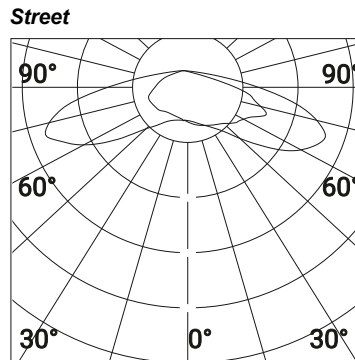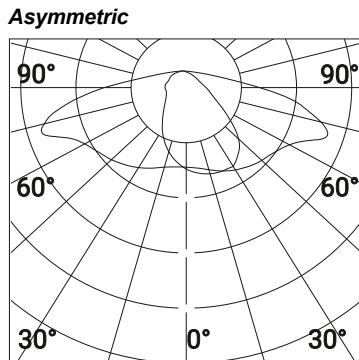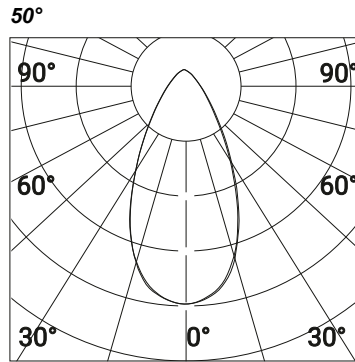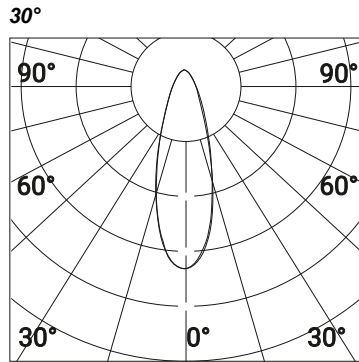

## FINISHES



white



sand



graphite



aluminum



corten

Job Name/Date:

Fixture Type Designation: